



Wherever there is clean energy,
there are MUST products and services



— MUST ENERGY (GUANGDONG) TECHNOLOGY CO., LTD —

Sales Office Address: 18F, Taibang Technology Building, No.4 Road High-Tech South,
Nanshan District, Shenzhen City, China

Web: www.mustenergy.com | www.mustpower.com

Tel: +86 755 83658583 (Asia) | +86 755 83657661 (Africa)
+86 755 83657660 (Europe) | +86 757 82629306 (Americas)

Factory Address: Block 8, Huanan Power Innovation and Technology Park, No.115 Zhangcha Road 1,
Chancheng District, Foshan City, Guangdong Province, China.



Must Energy Group

The technical specifications of this document are subject to change without any notice

PRODUCT CATALOGUE

Inverter/ Solar Charge Controller

120V/230V

Why Choose MUST?

● MUST Renewable

We are proud to have been manufacturing portable power stations, LiFePO4 batteries, inverters, UPS, and solar charge controllers since 1998, with a team of 500 dedicated employees.

MUST integrates the latest and most advanced technology and automation solutions, owning the most complete product line in the industry with reliable quality, high efficiency and stable performance.



Years Industry Experience
20+

Plants
50,000m²



R&D Staffs
100+

Patents, copyright
120+

Employees
900+

Overseas Service Center
6

● Efficient Production, Operation, Quality Control



Automatic integrated production line, automatic SMT production line and automatic and digital quality control and management of manufacturing key sections: online AOI inspection, FCT, ATE, Aging test. R&D tests includes Islanding detection etc.



Complete Power Solution

Committed to providing one-stop power solution, including power generation, power conversion, storage, monitoring & management and accessories.

OFF GRID SOLAR INVERTER 	ON GRID INVERTER 	HYBRID SOLAR INVERTER 	POWER INVERTER 
BALCONY ENERGY STORAGE  	ALL-IN-ONE SYSTEM  	LITHIUM BATTERY   	UPS  
			SOLAR CHARGER CONTROL 

230V Series

Off Grid Solar Inverter/ On/Off Grid Hybrid Solar Inverter/ Grid-Tie Solar Inverter/ Off Grid Power Inverter



SIMULATED SINE WAVE SOLAR INVERTER PV1100 PLUS Series

1.2~2.4KVA | PWM 50A | AC 10A/20A




PV1100 Plus is a cost effective , intelligent hybrid off grid solar inverter. The LCD display offers friendly user-configurable button adjustment such as battery charging current, AC/solar charger priority and DC priority. When battery voltage is low, it will automatically switch to AC grid to supply continuous power to the loads. It suitable for personal home use.

- Simulated sine wave inverter
- Built-in 50A PWM Solar Charge Controller
- MFD (multi-function display)
- 10A or 20A standard charging current from utility
- AC/solar priority for output via MFD
- AC/solar priority for charging via MFD
- 3 steps charging algorithm
- Overload & short-circuit protection
- Battery reverse polarity protection
- Deep discharge protection
- Auto restart while AC/solar is recovering
- Adjustable solar and utility charging current

Back panel description



Solar system connection

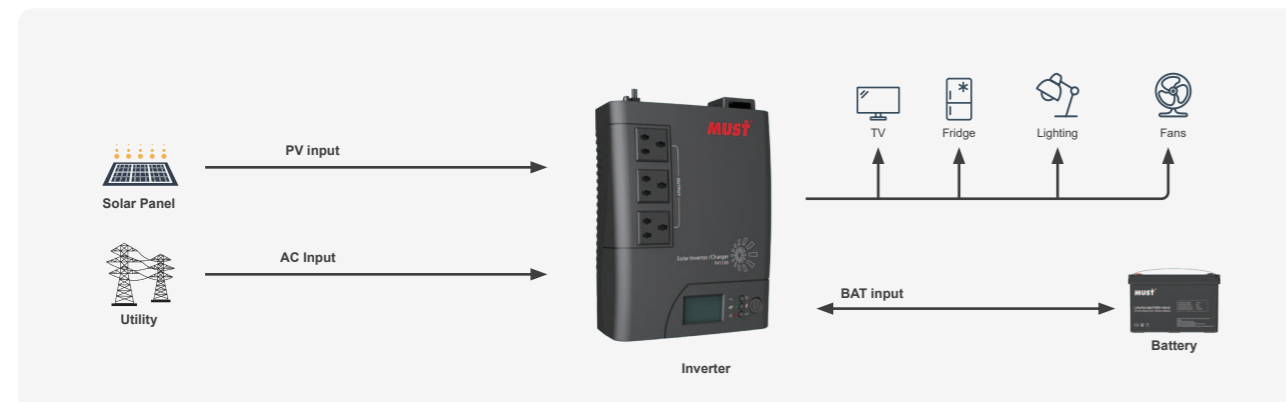

MODEL	PV11-1200 Plus	PV11-2400 Plus
Nominal Battery System Voltage	12VDC	24VDC
INVERTER OUTPUT		
Rated Power	1200VA/720W	2400VA/1440W
Waveform	Simulated Sine-wave	
Nominal Output Voltage RMS	230V	
Output Voltage Regulation	+10/-18%	
Output Frequency	50Hz/60Hz +/-1 Hz	
Inverter Efficiency(Peak)	>80%	
Line Mode Efficiency	>98%	
Typical Transfer Time	Typical 15~20ms 40ms max	
AC INPUT		
Voltage	230VAC	
Selectable Voltage Range	Narrow	170~280VAC
	Wide	90~280VAC
Frequency Range	40Hz-70Hz (Auto sensing)	
BATTERY		
Nominal Input Voltage	12VDC	24VDC
Minimum Start Voltage	10.5VDC	21.0VDC
Low Battery Alarm	10.5VDC (min)	21VDC (min)
Low Battery Cutoff	10~12VDC (Can be set)	20~24VDC (Can be set)
High Voltage Cutoff	15.0VDC (max)	30.0VDC (max)
SOLAR CHARGER & AC CHARGER		
Maximum PV Charge Current	50A (max)	
Maximum PV Array Power	750W	1500W
PWM Range @ Operating Voltage	16~55VDC	
Maximum PV Array Open Circuit Voltage	55VDC	
Maximum Efficiency	>95%	
Standby Power Consumption	<2W	
AC Charger Voltage	14.4V(max)	28.8V(max)
AC Charging Current	10A / 20A (Can be set)	
Maximum Charge Current	10-50A (Can be set)	
BYPASS & PROTECTION		
Nominal Input Frequency	40Hz - 70Hz	
Overload Protection (SMPS Load)	FUSE	
Output Short Circuit Protection	FUSE	
Bypass Fuse Rating	10A	
Max Bypass Current	10Amp	
MECHANICAL SPECIFICATIONS		
Machine Dimension (W*H*D)(mm)	295*230*85	
Package Dimension (W*H*D)(mm)	365*295*140	
N.W (kg)	2.7	
G.W (kg)	13.5kg/4pcs	
OTHER		
Operation Temperature Range	0°C to 50°C	
Audible Noise	50dB MAX	
Warranty	2years	
Display	LED+LCD	

*The technical specifications of this document are subject to change without any notice

HIGH FREQUENCY OFF GRID SOLAR INVERTER PV1500 Series

1~2KVA | MPPT 45A | AC 15A/20A



It is a cost effective, intelligent solar inverter which accepts Solar & Utility input at the same time. The comprehensive LCD display offers user- configurable and easy-accessible button adjustment such as battery charging current, AC/solar charger priority and DC priority. When battery voltage is low, it will automatically switch to AC grid to supply continuous power to the loads.


- Built-in 45A MPPT Solar Charge Controller
- 15A@24V, 20A@12V standard charging current from utility AC
- AC/solar priority for charging via MFD
- Different charging mode for different kinds of batteries
- Overload & short-circuit protection, Battery reverse polarity protection, Deep discharge protection
- Auto restart while AC/solar is recovering Adjustable solar and utility charging current
- Support two kinds of batteries include LiFePO4 Lithium Battery Pack and Lead-acid Battery.
- Support one key battery type fast setting
- Automatic activate protected lithium battery pack by Utility AC.
- Automatic activate protected lithium battery pack by Solar PV
- Low shutdown loss for energy storage system application

Back panel description

1KW/ 2KW

1. Output Receptacle (s)
2. LCD display
3. Status indicators
4. Setting button
5. Power switch
6. External battery connectors
7. FAN
8. Solar panel terminal
9. Input circuit breaker (plastic case)
10. AC input

Solar system connection

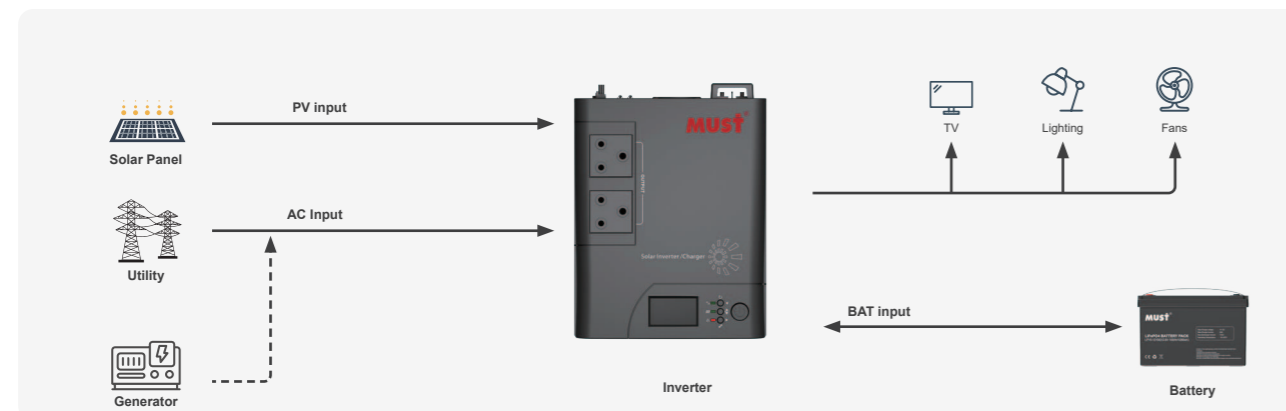

MODEL	PV15-1012		PV15-2024	
Nominal Battery System Voltage	12VDC		24VDC	
INVERTER OUTPUT				
Rated Power	1000VA / 600W		2000VA / 1200W	
Waveform	Pure Sine Wave			
Nominal Output Voltage RMS	230V			
Output Voltage Regulation	+10/-18%			
Output Frequency	50Hz / 60Hz ± 1Hz			
Inverter Efficiency (Peak)	>90%			
Line Mode Efficiency	>95%			
Typical Transfer Time	Typical < 10ms , 20ms max			
AC INPUT				
Voltage	230VAC			
Voltage Range	170~280VAC (UPS) / 90~280VAC (APL) / 184~258VAC (VDE)			
Frequency Range	50Hz/ 60Hz (auto sensing)			
BATTERY				
Note: Below Parameters (PB) Lead-acid Battery / (LI) LiFePO4 Lithium Battery Pack - 12V(4 Series) 24V(8 Series)				
Nominal Input Voltage	12VDC		24VDC	
Low Battery Cutoff	10.5VDC(PB)	11.5VDC(LI)	21.0VDC(PB)	23.0VDC(LI)
Low Battery Alarm	11.0VDC(PB)	12.0VDC(LI)	22.0VDC(PB)	24.0VDC(LI)
Low Battery Voltage Recover	12.5VDC(PB)	12.8VDC(LI)	25.0VDC(PB)	25.6VDC(LI)
High Battery Voltage Recover	14.5VDC(PB)	14.5VDC(LI)	29.0VDC(PB)	29.0VDC(LI)
High Battery Voltage Cutoff	15.0VDC(PB)	15.0VDC(LI)	30.0VDC(PB)	30.0VDC(LI)
SOLAR CHARGER & AC CHARGER				
Charger Voltage boost	14.4VDC(PB)	14.4VDC(LI)	28.8VDC(PB)	28.8VDC(LI)
Charger Voltage float	13.8VDC(PB)	14.4VDC(LI)	27.6VDC(PB)	28.8VDC(LI)
Maximum PV Charge Current	45A (max)			
Maximum PV Array Power	600W		1200W	
MPPT Operating Voltage Range	15 ~ 75VDC		30 ~ 75VDC	
Maximum PV Array Open Voltage	105V			
Maximum Efficiency	> 95%			
AC Charging Current	10A/20A (Can be set)		7A/15A (Can be set)	
Maximum Charge Current AC+PV	10~65A (Can be set)		10~60A (Can be set)	
BYPASS & PROTECTION				
Overload Protection (SMPS Load)			FUSE	
Output Short Circuit Protection			FUSE	
Bypass Fuse Rating	7A		10A	
Max Bypass Current	7A		10A	
MECHANICAL SPECIFICATIONS				
Machine Dimension (W*H*D)(mm)	235*290*92		235*290*92	
Package Dimension (W*H*D)(mm)	595*375*315		595*375*315	
N.W (kg)	2.8		3.0	
G.W (kg)	3.5		3.7	
Material	Plastic case		Plastic case	
OTHER				
Operation Temperature Range	0°C to 40°C			
Audible Noise	50dB MAX			
Warranty	2years			
Display	LED+LCD			
CERTIFICATION & STANDARDS				
CE				

*The technical specifications of this document are subject to change without any notice

HIGH FREQUENCY SOLAR INVERTER PV1800 ECO Series

2~6.2KW | Dual output


PV1800 ECO is a multi-function inverter/charger, combining functions of inverter, MPPT solar charger and battery charger to offer uninterruptible power support in portable size. PV1800 ECO Series can run without battery. The Maximum PV input voltage can reach 400V/450V/500V, which can help customers make full use of solar energy.




- Pure sine wave output
- Smart LCD setting (Working modes, Charge Current, Charge Voltage, etc).
- Built-in MPPT solar charge controller
- Wide PV input voltage range
- Can provide the power to the load without battery
- Combining solar system, AC utility, and battery power source to supply continuous power
- Overload, short circuit and Deep discharge protection
- Cold start function
- Support RS485,CAN monitoring function
- Dual outputs for smart load management
- Can communicate with lithium batteries (CAN port)



Back panel description

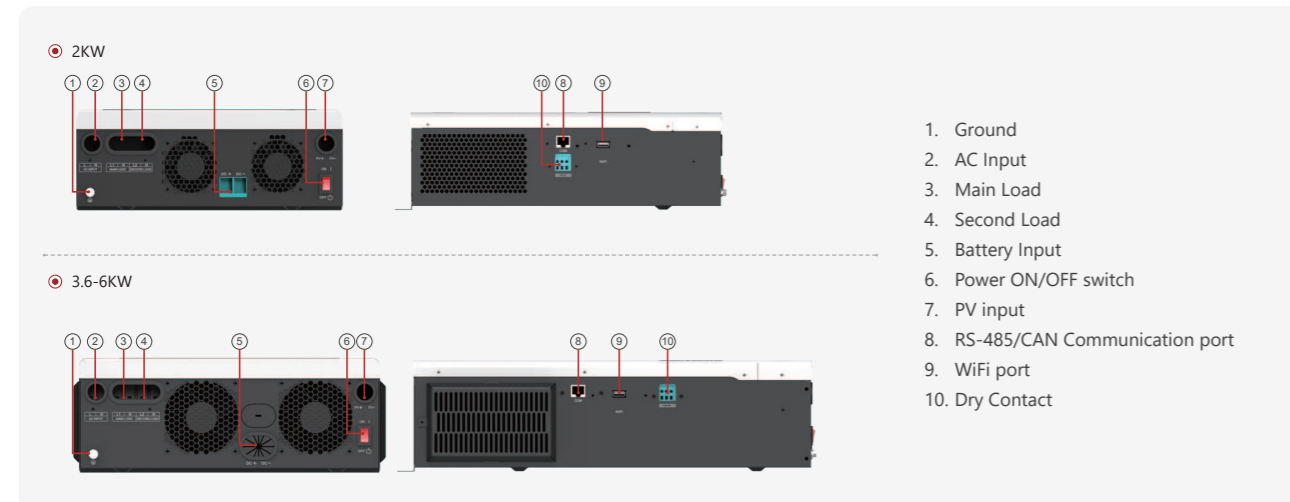

Solar system connection

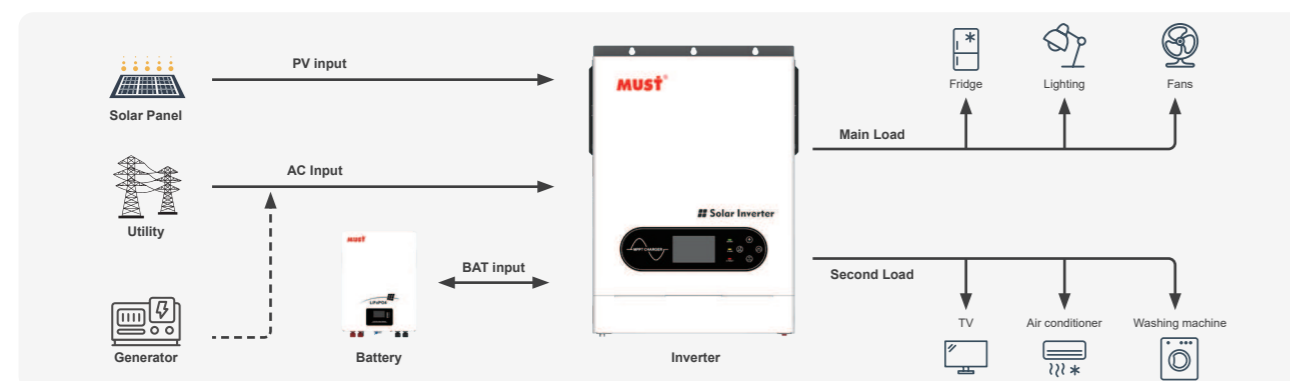

MODEL	PV18-2012 ECO	PV18-3624 ECO	PV18-4024 ECO	PV18-6048 ECO	PV18-6248 ECO
Nominal Battery System Voltage	12VDC	24VDC	24VDC	48VDC	48VDC
INVERTER OUTPUT					
Rated Power (Main+Second Load)	2000VA/2000W	3600VA/3600W	4000VA/4000W	6000VA/6000W	6200VA/6200W
Battery Mode (Main+Second Load)	2000VA/1600W	3000VA/3000W	3500VA/3500W	5500VA/5500W	6200VA/6200W
Surge Power	3200W	6000W	7000W	11000W	12400W
Waveform	Pure sine wave				
AC Voltage Regulation (Batt.Mode)	230VAC±5%(Setting)				
Inverter Efficiency(Peak)	90~93%				
Transfer Time	10ms (UPS / VDE4105) / 20ms (APL)				
AC INPUT					
Voltage	230VAC±5%				
Selectable Voltage Range	170~280VAC(UPS) / 90~280VAC(APL) / 184~253VAC(VDE4105)				
Frequency Range	50Hz / 60Hz(Auto sensing)				
BATTERY					
Normal voltage	12VDC	24VDC	24VDC	48VDC	48VDC
Floating Charge Voltage	13.7VDC	27.4VDC	27.4VDC	54.8VDC	54.8VDC
Overcharge Protection	15VDC	30VDC	30VDC	60VDC	60VDC
SOLAR CHARGER & AC CHARGER					
Maximum PV Array Open Circuit Voltage	400VDC	400VDC	450VDC	450VDC	500VDC
Maximum PV Input Current	16A	18A	18A	28A	28A
Charging Algorithm	3-Step (Flooded Battery, AGM / GEL / LEAD Battery), 4-Step (Li)				
Maximum PV Array Power	2000W	4000W	4000W	6000W	6200W
PV Array MPPT Voltage Range(Typ.)	30~320VDC		60~360VDC		120~450VDC
Maximum Solar Charge Current	80A	100A	100A	100A	120A
Maximum AC Charge Current	80A	60A	60A	100A	100A
Maximum Charge Current	80A	100A	100A	100A	120A
MECHANICAL SPECIFICATIONS					
Machine Dimension (W*H*D)(mm)	290*367*111		318*454*122.5		
Package Dimension (W*H*D)(mm)	446*394*187		544.5*410*200		
N.W (kg)	6	7.8	8.0	9.0	10
G.W (kg)	7.2	9.3	9.5	10.2	11.6
OTHER					
Humidity	5% to 95% Relative humidity (Non-condensing)				
Operating Temperature	-10°C~50°C				
Storage Temperature	-15°C~60°C				
Communication Interface	USB/WIFI/RS-485/CAN				
Warranty	2 year				
Anti-dust Kit	none	yes	yes	yes	yes
CERTIFICATION & STANDARDS					
CE					

*The technical specifications of this document are subject to change without any notice

HIGH FREQUENCY SOLAR INVERTER PV1800 PRO Series


2~3.2KW | 400V | WiFi

PV1800 PRO is a multi-function inverter/charger, combining functions of inverter, MPPT solar charger and battery charger to offer uninterruptible power support in portable size. PV1800 PRO Series can run without battery. The Maximum PV array open circuit voltage can reach 400V and MPPT voltage is 60~320Vdc, which Can help customers make full use of solar energy.




- Pure sine wave output
- Smart LCD setting (Working modes, Charge Current, Charge Voltage, etc).
- Built-in MPPT solar charge controller
- MAX PV Array Open Circuit Voltage: 400V
- Combining solar system, AC utility, and battery power source to supply continuous power
- Overload, short circuit and Deep discharge protection
- Cold start function
- Support USB, RS485 monitoring function
- WIFI remote monitoring (Built in wifi module and antenna)
- PV/ AC activation function
- BMS communication function

Back panel description

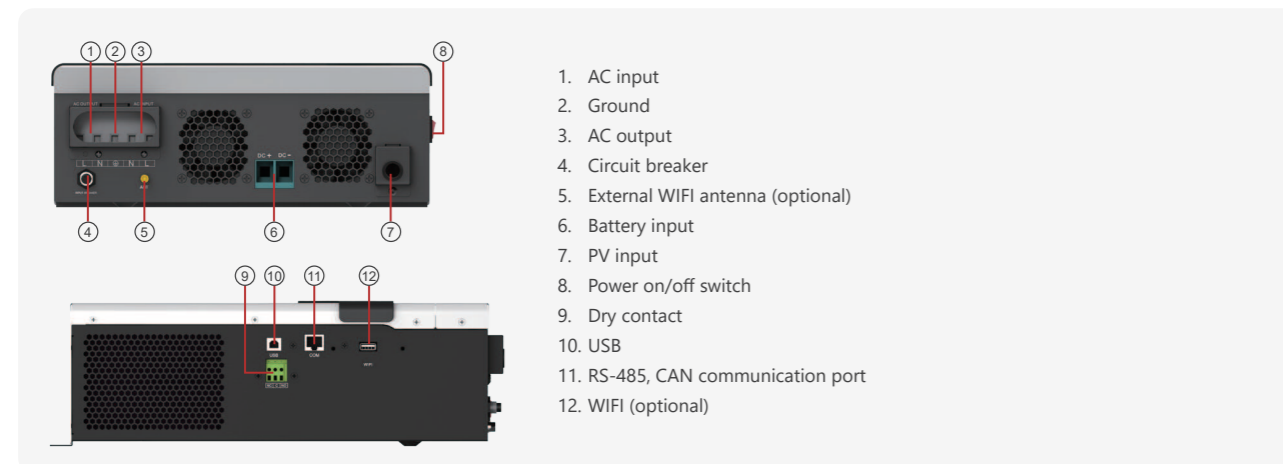

Solar system connection

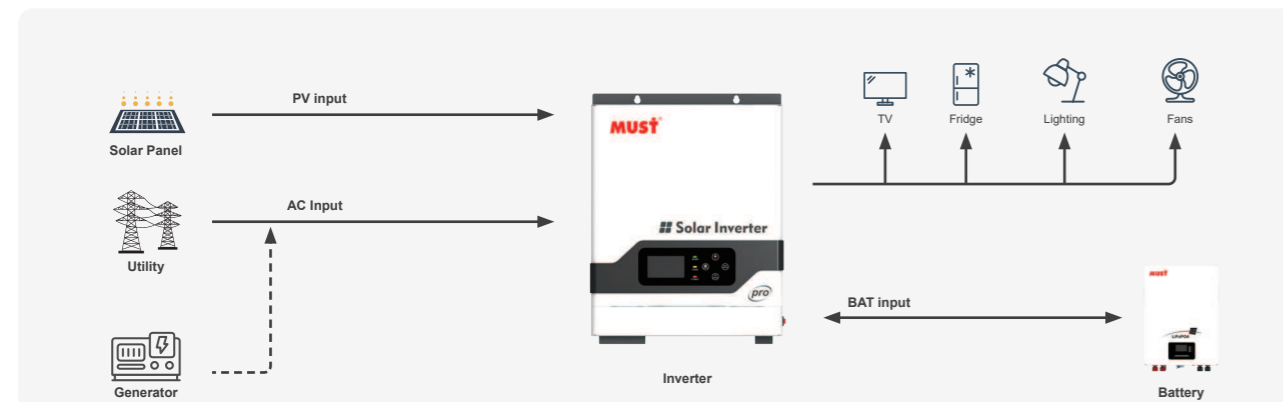

MODEL	PV18-2024 PRO	PV18-3224 PRO
Nominal Battery System Voltage	24VDC	
INVERTER OUTPUT		
Rated Power	2000VA / 2000W	3200VA / 3200W
Surge Power	4000W	6400W
Waveform	Pure sine wave	
AC Voltage Regulation (Batt.Mode)	230VAC±5%(Setting)	
Inverter Efficiency(Peak)	90%	
Transfer Time	10ms (UPS / VDE4105) / 20ms (APL)	
AC INPUT		
Voltage	230VAC±5%	
Selectable Voltage Range	170~280VAC(UPS) / 90~280VAC(APL) / 184~253VAC(VED4105)	
Frequency Range	50Hz / 60Hz(Auto sensing)	
BATTERY		
Normal voltage	24VDC	
Floating Charge Voltage	27.4VDC	
Overcharge Protection	30VDC	
SOLAR CHARGER & AC CHARGER		
Maximum PV Array Open Circuit Voltage	400VDC	
Maximum PV input current	18A	
Charging Algorithm	3-Step (Flooded Battery, AGM / GEL / LEAD Battery), 4-Step (Li)	
Maximum PV Array Power	3000W	4000W
PV Array MPPT Voltage Range	60~320 VDC	
Maximum Solar Charge Current	80A	100A
Maximum AC Charge Current	40A	60A
Maximum Charge Current	80A	100A
MECHANICAL SPECIFICATIONS		
Machine Dimension (W*H*D)(mm)	290*367*111	
Package Dimension (W*H*D)(mm)	/	
N.W (kg)	/	
G.W (kg)	/	
OTHER		
Humidity	5% to 95% Relative humidity (Non-condensing)	
Operating Temperature	0°C~50°C	
Storage Temperature	-15°C~60°C	
Warranty	2 year	
MECHANICAL SPECIFICATIONS		
CE-EMC+LVD (EN6100-6-3:2007, EN6100-6-1:2017+EN IEC62109-1:2010, EN IEC62109-2:2011)		

*The technical specifications of this document are subject to change without any notice

HIGH FREQUENCY SOLAR INVERTER PV1800 PRO Series

3~5.2KW | 450V | WiFi | 9pcs parallel


PV1800 PRO is a multi-function inverter/charger, combining functions of inverter, MPPT solar charger and battery charger to offer uninterruptible power support in portable size. PV1800 PRO Series can run without battery. The Maximum PV array open circuit voltage can reach 450V and MPPT voltage is 150~430Vdc, which can help customers make full use of solar energy.




- Pure sine wave output
- Smart LCD setting (Working modes, Charge Current, Charge Voltage, etc).
- Built-in MPPT solar charge controller
- MAX PV Array Open Circuit Voltage: 450V
- Combining solar system, AC utility, and battery power source to supply continuous power
- Overload, short circuit and Deep discharge protection
- Cold start function
- Support USB, RS485 monitoring function
- Parallel operation with up to 9 units
- WIFI remote monitoring (optional)



Back panel description

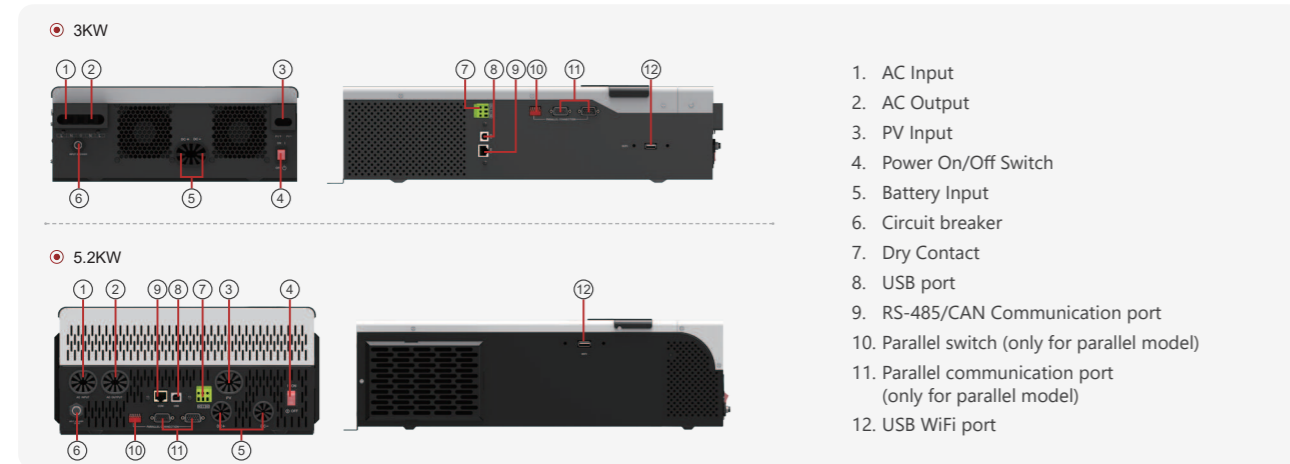

Solar system connection

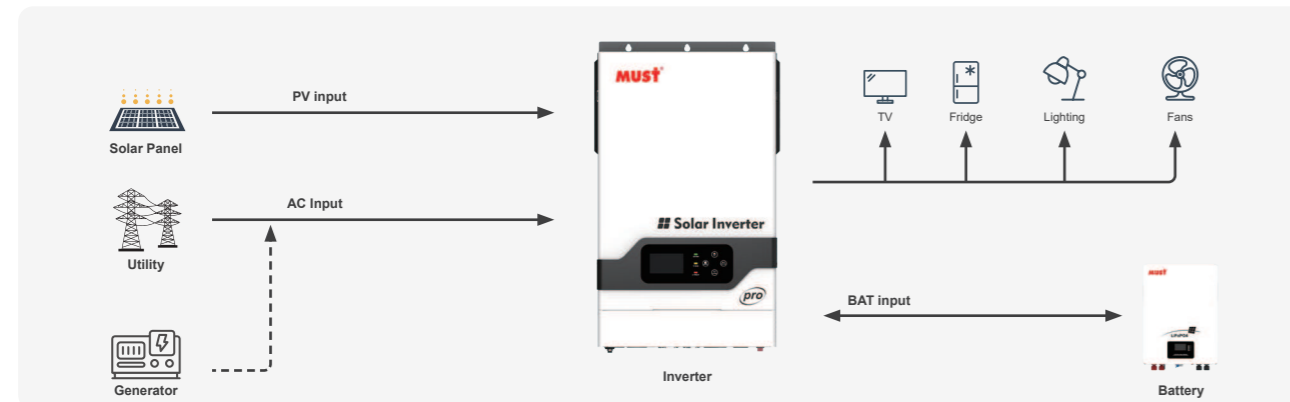

MODEL	PV18-3024 PRO	PV18-5248 PRO		
Nominal Battery System Voltage	24VDC	48VDC		
INVERTER OUTPUT				
Rated Power	3000VA / 3000W	5200VA / 5200W		
Surge Power	6000W	10400W		
Waveform	Pure sine wave			
AC Voltage Regulation (Batt.Mode)	230VAC±5%(Setting)			
Inverter Efficiency(Peak)	90%			
Transfer Time	10ms (UPS / VDE4105) / 20ms (APL)			
AC INPUT				
Voltage	230VAC±5%			
Selectable Voltage Range	170~280VAC(UPS) / 90~280VAC(APL) / 184~253VAC(VDE4105)			
Frequency Range	50Hz / 60Hz(Auto sensing)			
BATTERY				
Normal voltage	24VDC	48VDC		
Floating Charge Voltage	27.4VDC	54.8VDC		
Overcharge Protection	30VDC	60VDC		
SOLAR CHARGER & AC CHARGER				
Maximum PV Array Open Circuit Voltage	450VDC			
Maximum PV input current	18A	18A	27A	
Charging Algorithm	3-Step (Flooded Battery, AGM / GEL / LEAD Battery), 4-Step (Li)			
Maximum PV Array Power	4000W	5000W	6000W	
PV Array MPPT Voltage Range	150~430 VDC			
Maximum Solar Charge Current	80A	100A	80A	100A
Maximum AC Charge Current	60A	80A	60A	80A
Maximum Charge Current	80A	100A	80A	100A
MECHANICAL SPECIFICATIONS				
Machine Dimension (W*H*D)(mm)	322*486*134		309*505*147	
Package Dimension (W*H*D)(mm)	575*229*425		603*260*400	
N.W (kg)	10.6		12.9	
G.W (kg)	12		13.8	
OTHER				
Humidity	5% to 95% Relative humidity (Non-condensing)			
Operating Temperature	0°C~50°C			
Storage Temperature	-15°C~60°C			
Warranty	2years			
CERTIFICATION & STANDARDS				
CE-EMC+LVD (EN6100-6-3:2007, EN6100-6-1:2017+EN IEC62109-1:2010, EN IEC62109-2:2011) EN IEC62368-1:2020+A11:2020 EN IEC62368-1:2018 Rohs-(2011/65/EUand2015/863/EU)				

*The technical specifications of this document are subject to change without any notice

HIGH FREQUENCY SOLAR INVERTER PV1800 PRO II Series

4~6KW | 500V | 100~120A | Dual output


PV1800 PRO II is a multi-function inverter/charger, combining functions of inverter, MPPT solar charger and battery charger to offer uninterruptible power support in portable size. PV1800 PRO II Series can run without battery. The Maximum PV array open circuit voltage can reach 500V and MPPT voltage range is 90~430V for 4KW, 120v~430V for 6KW, which Can help customers make full use of solar energy.




- Pure sine wave output
- Smart LCD setting (Working modes, Charge Current, Charge Voltage, etc).
- Built-in MPPT solar charge controller
- MAX PV Array Open Circuit Voltage: 500V (450V for parallel)
- Can provide the power to the load without battery
- Combining solar system, AC utility, and battery power source to supply continuous power
- Overload, short circuit and Deep discharge protection
- Cold start function
- Support USB, RS485 monitoring function
- Parallel operation with up to 6 units (optional)
- WIFI remote monitoring (optional)
- Dual outputs for smart load management
- Can communicate with lithium batteries



Back panel description

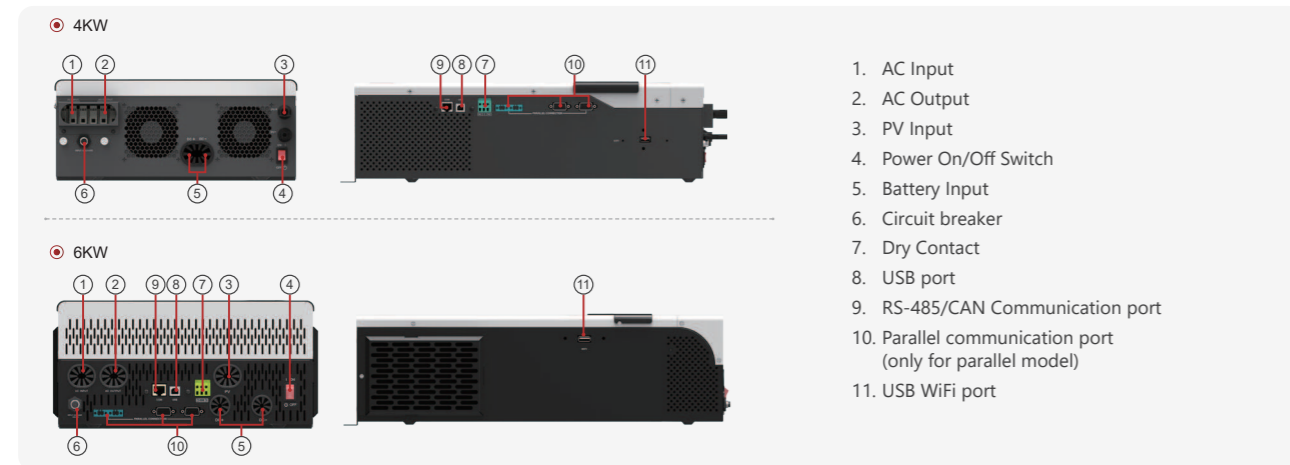

Solar system connection

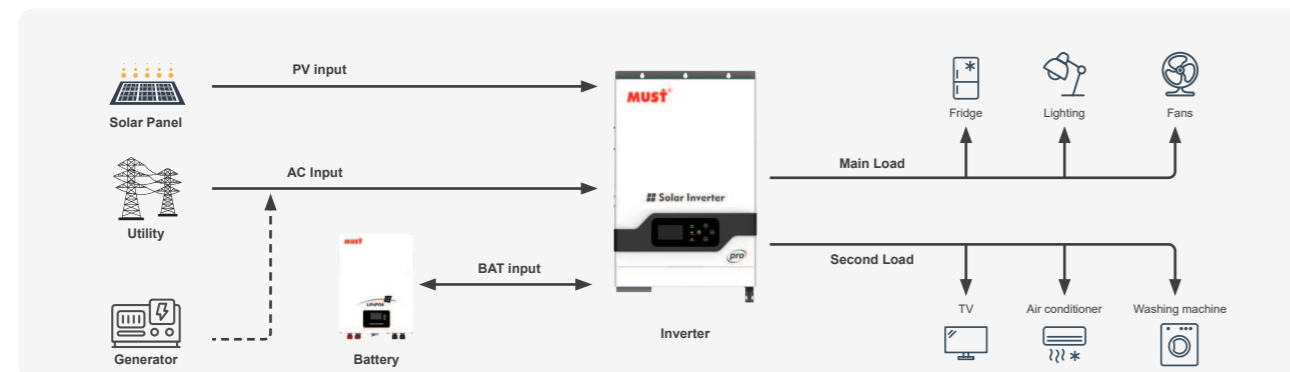

MODEL	PV18-4024 PRO II	PV18-6048 PRO II
Default Battery System Voltage	24VDC	48VDC
INVERTER OUTPUT		
Rated Power	4000VA / 4000W	6000VA / 6000W
Surge Power	8000W	12000W
Waveform	Pure sine wave	
AC Voltage Regulation (Batt.Mode)	230VAC±5%(Setting)	
Inverter Efficiency(Peak)	92%	
Transfer Time	10ms(UPS / VDE4105) / 20ms(APL) / < 50ms typical (For parallel operation)	
AC INPUT		
Voltage	230VAC	
Selectable Voltage Range	170~280VAC(UPS) / 90~280VAC(APL) / 184~253VAC(VDE)	
Frequency Range	50Hz / 60Hz (Auto sensing)	
BATTERY		
Normal voltage	24VDC	48VDC
Floating Charge Voltage	27.4VDC	54.8VDC
Overcharge Protection	30VDC	60VDC
SOLAR CHARGER & AC CHARGER		
Maximum PV Array Open Circuit Voltage	500VDC (450V for parallel)	
Charging Algorithm	3-Step (Flooded Battery, AGM / GEL / LEAD Battery), 4-Step (Li)	
Maximum PV Array Power	5000W	6000W
PV Array MPPT Voltage Range	90~430VDC	120~430 VDC
Maximum Solar Charge Current	100A	120A
Maximum AC Charge Current	80A	100A
Maximum Charge Current	100A	120A
MECHANICAL SPECIFICATIONS		
Machine Dimension (W*H*D)(mm)	322*486*134	309*505*147
Package Dimension (W*H*D)(mm)	575*229*425	603*260*400
N.W (kg)	9.5	12.5
G.W (kg)	12	13.8
OTHER		
Humidity	5% to 95% Relativ Humidity (Non-condensing)	
Operating Temperature	0°C~50°C	
Storage Temperature	-15°C~60°C	
Communication Interface	USB/ WIFI	
Warranty	2 year	

CERTIFICATION & STANDARDS

CE-EMC+LVD (EN6100-6-3:2007, EN6100-6-1:2017+EN IEC62109-1:2010, EN IEC62109-2:2011)
 EN IEC62368-1:2020+A11:2020
 CE-LVD (IEC62109-1:2010, EN IEC62109-2:2011)
 EN IEC62368-1:2018, EN IEC62109-1:2010, EN IEC62109-2:2011

*The technical specifications of this document are subject to change without any notice

HIGH FREQUENCY SOLAR INVERTER PV1800 PRO II Series

6.2~12KW | PV500V | 120A~150A | Dual output




PV1800 PRO II is a multi-function inverter/charger, combining functions of inverter, MPPT solar charger and battery charger to offer uninterruptible power support in portable size. PV1800 PRO II Series can run without battery. The Maximum PV input voltage can reach 500V and MPPT voltage range is 90~430Vdc, built-in two MPPTs solar charge controller, which can help customers make full use of solar energy.




- Dual output for smart load management
- Smart color LCD setting (Working modes, Charge Current, Charge Voltage, etc.)
- Built-in Two MPPTs solar charge controller
- Wide MPPT voltage range is 90~450V, the maximum PV input voltage can reach 500V
- Can provide the power to the load without battery
- Combining solar system, AC utility, and battery power source to supply continuous power
- Overload, short circuit and Deep discharge protection
- With BMS lithium battery communication function
- With AC/PV lithium battery activation function
- Support USB, RS485 monitoring function
- Parallel operation up to 6 units (optional)
- WIFI remote monitoring (optional)

Back panel description

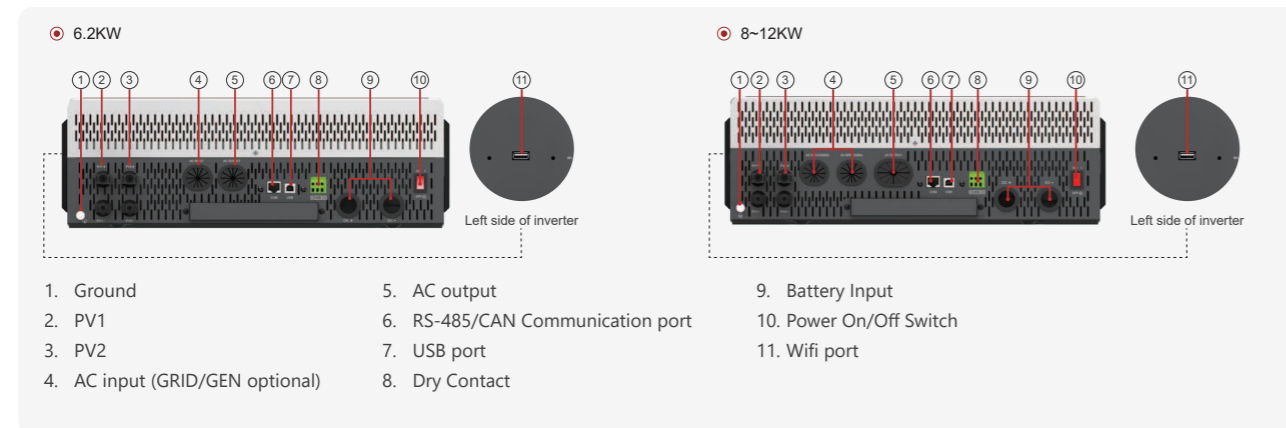

Solar system connection

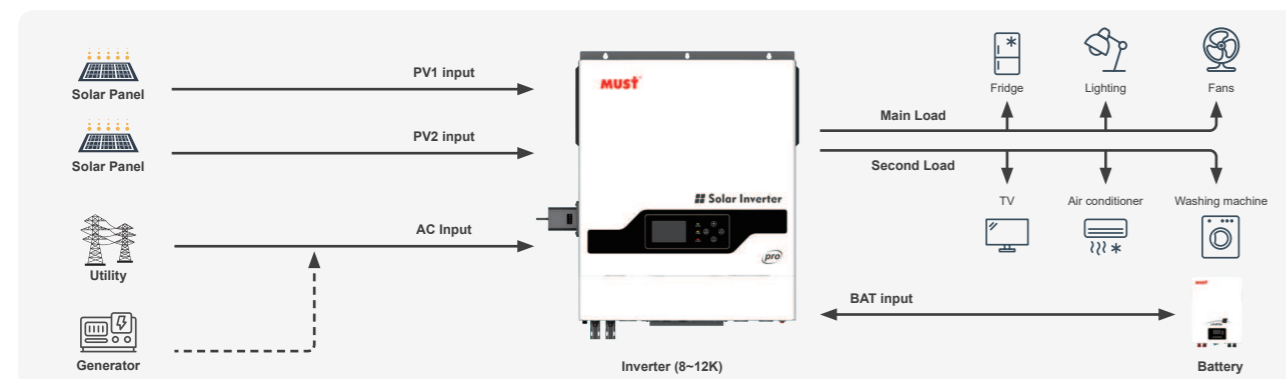

MODEL	PV18-6248 PRO II	PV18-8048 PRO II	PV18-10048 PRO II	PV18-11048 PRO II	PV18-12048 PRO II
Default Battery System Voltage	48VDC				
INVERTER OUTPUT					
Rated Power	6200VA/6200W	8000VA/8000W	10000VA/10000W	11000VA/11000W	12000VA/12000W
Surge Power	12400W	16000W	20000W	22000W	24000W
Waveform	Pure sine wave				
AC Voltage Regulation (Batt.Mode)	230VAC±5%(Setting)				
Inverter Efficiency(Peak)	92%				
Transfer Time	10ms(UPS / VDE4105) / 20ms(APL)				
AC INPUT					
Voltage	230VAC				
Selectable Voltage Range	170~280VAC(UPS) / 90~280VAC(APL) / 184~253VAC(VDE)				
Frequency Range	50Hz / 60Hz (Auto sensing)				
BATTERY					
Normal voltage	48VDC				
Floating Charge Voltage	54.8VDC				
Overcharge Protection	60VDC				
SOLAR CHARGER & AC CHARGER					
Maximum PV Array Open Circuit Voltage	500VDC				
Charging Algorithm	3-Step (Flooded Battery, AGM / GEL / LEAD Battery), 4-Step (Li)				
Maximum PV Array Power	4000W*2	4000W*2	5000W*2	6000W*2	6000W*2
Maximum PV Input Current	18A*2	18A*2	27A*2(40A max)	27A*2(40A max)	27A*2(40A max)
PV Array MPPT Voltage Range	90~430VDC				
Maximum Solar Charge Current	120A	120A	150A	150A	150A
Maximum AC Charge Current	100A	120A	150A	150A	150A
Maximum Charge Current	120A	120A	150A	150A	150A
MECHANICAL SPECIFICATIONS					
Machine Dimension (W*H*D)(mm)	425*473*145	425*527*145			
Package Dimension (W*H*D)(mm)	/	/	/	/	/
N.W (kg)	/	/	/	/	/
G.W (kg)	/	/	/	/	/
OTHER					
Humidity	5% to 95% Relativ Humidity (Non-condensing)				
Operating Temperature Range	0°C~50°C				
Storage Temperature Range	-15°C~60°C				
Warranty	2 year				
CERTIFICATION & STANDARDS					
CE-EMC+LVD (EN6100-6-3:2007, EN6100-6-1:2017+EN IEC62109-1:2010, EN IEC62109-2:2011) EN IEC62368-1:2020+A11:2020 CE-LVD (IEC62109-1:2010, EN IEC62109-2:2011) EN IEC62368-1:2018, EN IEC62109-1:2010, EN IEC62109-2:2011					

*The technical specifications of this document are subject to change without any notice

HIGH FREQUENCY SOLAR INVERTER PV1800 PRO Series


8~10KW | 450V | WiFi

This is a multi-function inverter/charger, combining functions of inverter, solar charger and battery charger to offer uninterruptible power support with portable size. Its comprehensive LCD display offers user-configurable and easy-accessible button operation such as battery charging current, AC/solar charger priority, and acceptable input voltage based on different applications.




- Pure sine wave output
- Combining solar system, AC utility, and battery power source to supply continuous power
- Configurable battery charging current based on applications via LCD setting
- Configurable AC/Solar Charger priority via LCD setting
- Compatible to mains voltage or generator power
- Auto restart while AC is recovering
- Overload/ Over temperature/ short circuit protection
- CAN/RS485 communication for BMS
- Cold start function
- WiFi remote monitoring (optional)

Back panel description

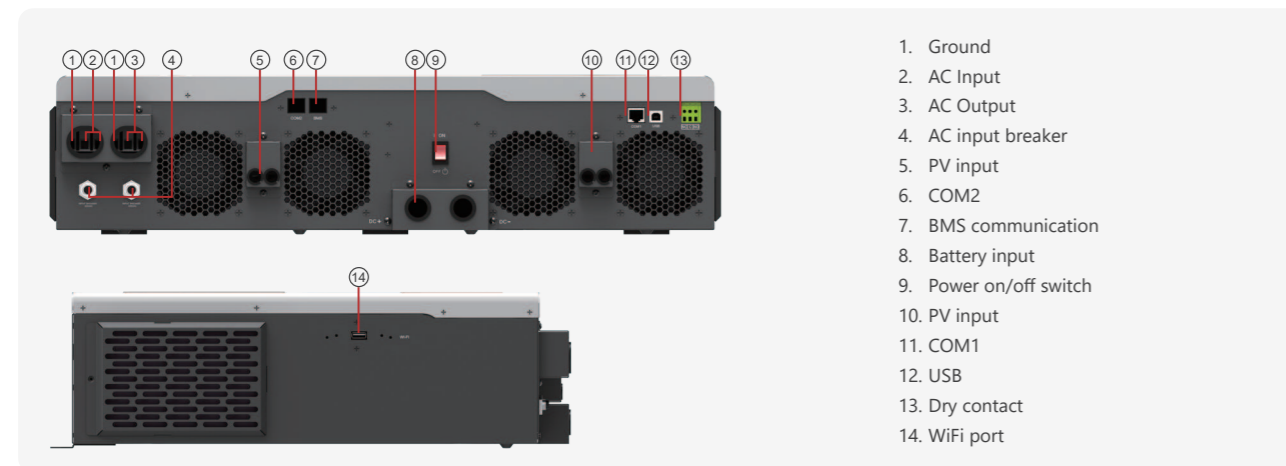

Solar system connection

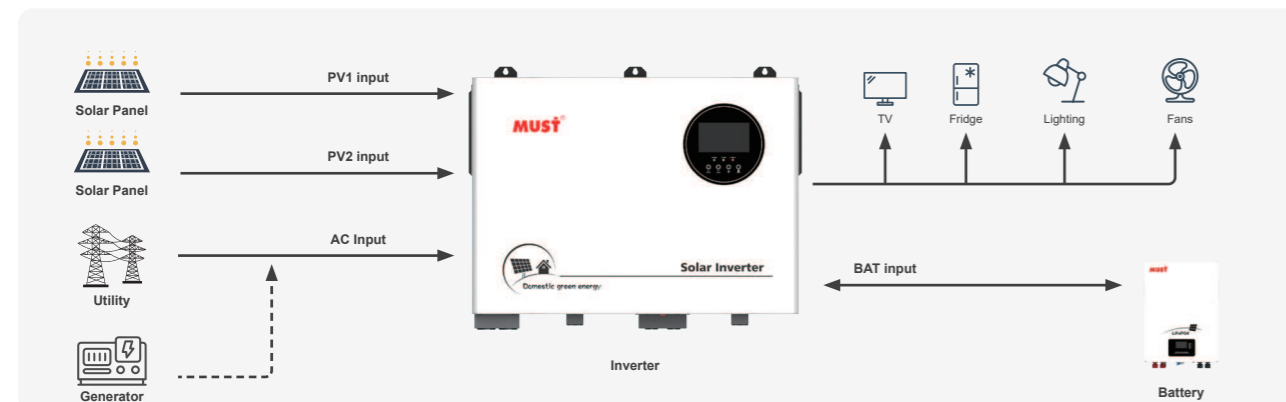

MODEL	PV18-8048 PRO	PV18-10048 PRO
Nominal Battery System Voltage	48VDC	
INVERTER OUTPUT		
Rated Power	8000W	10000W
Surge Power	16000W	20000W
Waveform	Pure Sine Wave	
AC Voltage Regulation (Batt.Mode)	230VAC±5%	
Output Frequency	60Hz or 50Hz	
Inverter Efficiency(Peak)	90%	
Transfer Time	10ms (UPS) 20ms (APL)	
AC INPUT		
Nominal Input Voltage	230VAC	
Max AC Input Voltage	300VAC	
Selectable Voltage Range	170~280VAC (UPS) / 90~280VAC (APL) / 184~253VAC(VDE4105)	
Frequency Range	50Hz / 60Hz(Auto detection)	
BATTERY		
Normal Voltage	48VDC	
SOLAR CHARGER & AC CHARGER		
AC Charging Current	2-120A	2-160A
Maximum PV Array Open Circuit Voltage	450VDC	
PV Array Open Circuit Voltage	150-430VDC	
Cold Start Voltage	46VDC	
Solar Charging Current	80A/80A	100A/100A
Default Charging Current	80A/80A	
Maximum Charge Current	160A	200A
Charging Algorithm	3-step (Flooded Battery / AGM / GEL/ LEAD Battery), 4-step(LI)	
MECHANICAL SPECIFICATIONS		
Machine Dimension (W*H*D)(mm)	600*503*141.2	
Package Dimension (W*H*D)(mm)	/	
N.W (kg)	21	
G.W (kg)	/	
OTHER		
Operating Temperature	-10°C~50°C	
Storage Temperature	-15°C ~60°C	
Warranty	2years	
CERTIFICATION & STANDARDS		
CE-EMC+LVD (EN6100-6-3:2007, EN6100-6-1:2017+EN IEC62109-1:2010, EN IEC62109-2:2011) EN IEC62368-1:2020+A11:2020 EN IEC62368-1:2018 Rohs-(2011/65/EUand2015/863/EU)		

*The technical specifications of this document are subject to change without any notice

HIGH FREQUENCY SOLAR INVERTER PV1800 VPK Series

1~5KW | PWM 50A/60A | WiFi




PV1800 VPK is a multi-function inverter/charger, combining functions of inverter, PWM solar charger and battery charger to offer uninterruptible power support with portable size. Its comprehensive LCD display offers user-configurable easy-accessible button operation such as battery charging current, AC/solar charger priority, and acceptable input voltage based on different applications.




- Smart LCD setting(Working modes, Charge Current, Charge Voltage, etc.)
- Built-in PWM 50A/60A solar charge controller
- New SUB working mode(Solar-Utility-Battery working mode)
- Combining solar system, AC utility, and battery power source to supply continuous power
- Overload, short circuit and deep discharge protection
- Parallel operation with up to 3 units (Available for 4KW/5KW only)
- Cold start function
- Support USB, RS485 monitoring function
- WIFI remote monitoring (optional)
- Compatible to generator

Back panel description

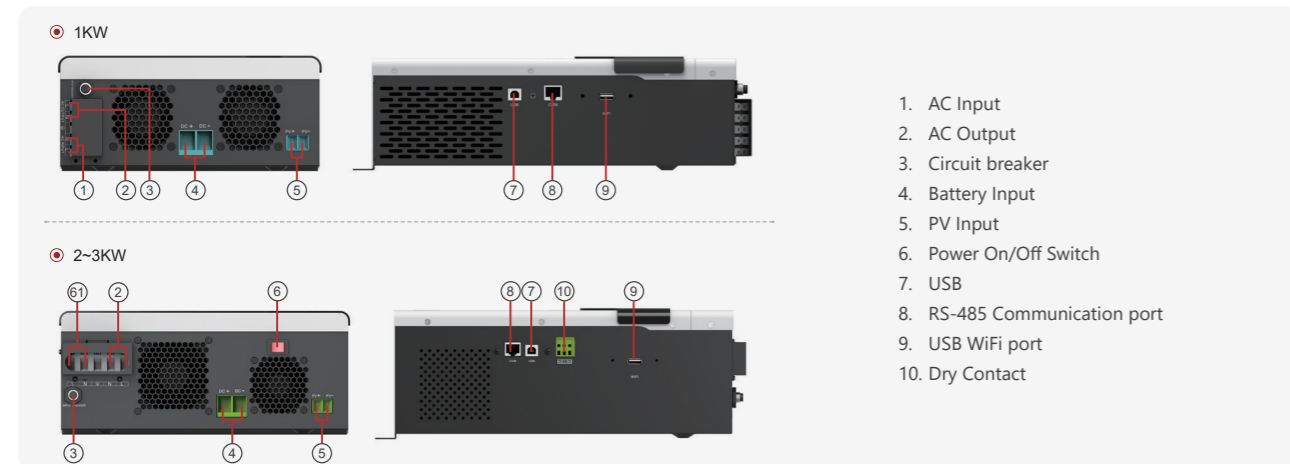

Solar system connection

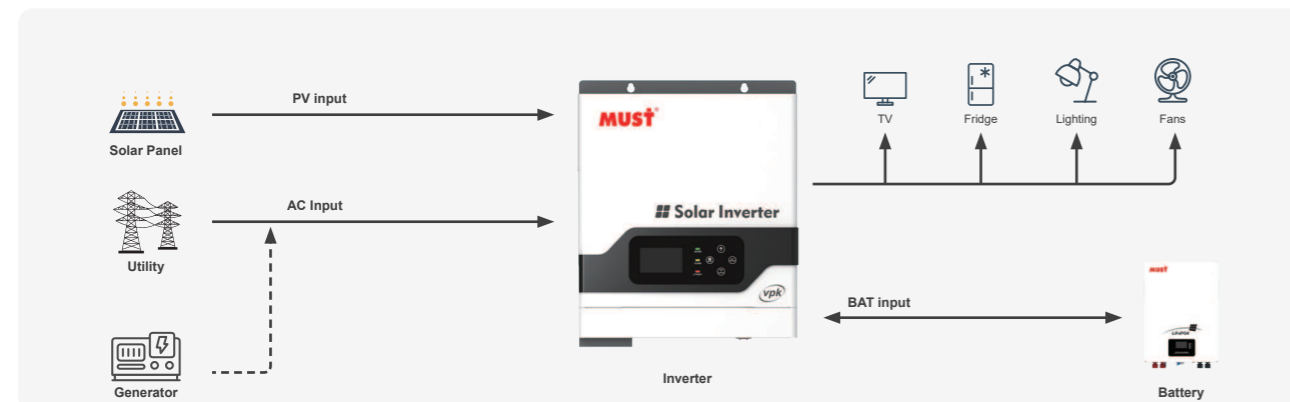

MODEL	PV18-1012 VPK	PV18-2024 VPK	PV18-3024 VPK	PV18-4048 VPK	PV18-5048 VPK
Nominal Battery System Voltage	12VDC	24VDC		48VDC	
INVERTER OUTPUT					
Rated Power	1000W	2000W	3000W	4000W	5000W
Surge Power	2000W	4000W	6000W	8000W	10000W
Waveform	Pure sine wave				
AC Voltage Regulation (Batt.Mode)	(220VAC~240VAC)±5%				
Inverter Efficiency(Peak)	93%				
Transfer Time	10ms (UPS / VDE4105) 20ms (APL)				
AC INPUT					
Voltage	230VAC				
Selectable Voltage Range	170~280VAC(For personal computer) / 90~280VAC(For home appliances) / 184~253VAC(VDE4105)				
Frequency Range	50Hz / 60Hz(Auto sensing)				
BATTERY					
Normal voltage	12VDC	24VDC		48VDC	
Floating Charge Voltage	13.7VDC	27.4VDC		54.8VDC	
Overcharge Protection	15.5VDC	30VDC		60VDC	
SOLAR CHARGER & AC CHARGER					
Maximum PV Array Open Circuit Voltage	55VDC	75VDC	80VDC	105VDC	
Standby Power Consumption	2W	2W		2W	
(PWM)Maximum Solar Charge Current	50A	50A	60A	60A	
Maximum AC Charge Current	10A or 20A	10A or 20A	20A or 30A	60A	
Maximum Charge Current	70A	70A	80A	120A	
MECHANICAL SPECIFICATIONS					
Machine Dimension (W*H*D)(mm)	224*337*98	290*342*125		297.5*468*125	
Package Dimension (W*H*D)(mm)	/	/		/	
N.W (kg)	/	/		/	
G.W (kg)	/	/		/	
OTHER					
Humidity	5% to 95% Relative humidity (Non-condensing)				
Operating Temperature	0°C~50°C				
Storage Temperature	-15°C ~60°C				
Warranty	2 year				
CERTIFICATION & STANDARDS					
CE-EMC+LVD (EN6100-6-4:2007, EN6100-6-2:2005+EN IEC62109-1:2010, EN IEC62109-2:2011)					
CE-LVD (IEC62109-1:2010, EN IEC62109-2:2011)					
UKCA					

*The technical specifications of this document are subject to change without any notice

HIGH FREQUENCY SOLAR INVERTER PV1800 VHM Series


2~5.5KW | MPPT 80A | PV 145V

PV1800 VHM is a multi-functional inverter/charger, combining functions of inverter, solar charger and battery charger to offer uninterruptible power support in portable size. Its comprehensive LCD display offers user-configurable and easy-accessible button operation such as battery charging current, AC/solar charger priority, and acceptable input voltage based on different applications.




- Rated power : 2KW -5.5KW
- Pure sine wave solar inverter
- Output power factor 1
- Built-in 80A MPPT solar charger
- Built-in anti-dust kit for harsh environment
- Support parallel operation up to 3 units (available for 3KW-5.5KW 48V)
- WIFI remote monitoring (optional)
- Compatible to generator

Back panel description

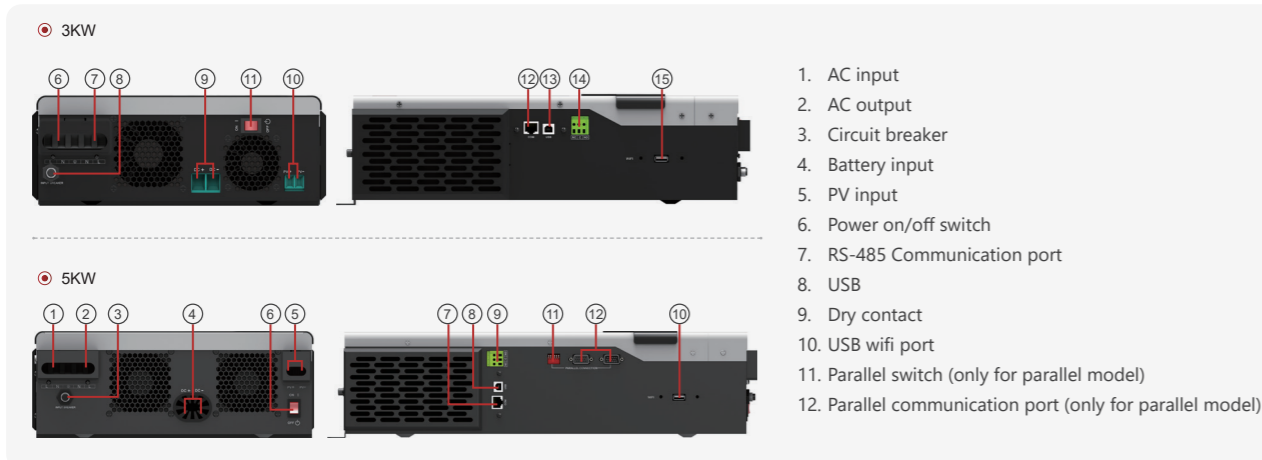

Solar system connection

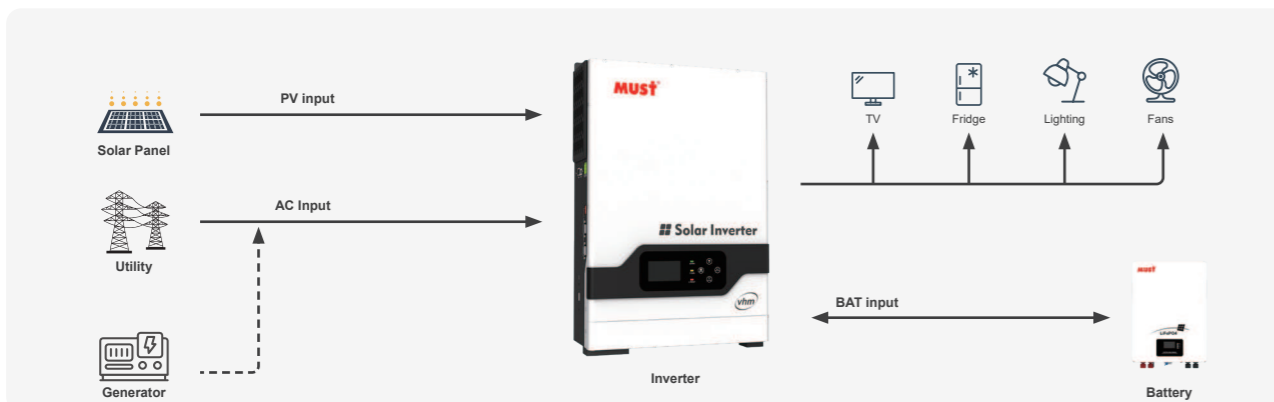

MODEL	PV18-2024 VHM	PV18-3024 VHM	PV18-3048 VHM	PV18-4048 VHM	PV18-5048 VHM	PV18-5548 VHM
Nominal Battery System Voltage	24VDC			48VDC		
INVERTER OUTPUT						
Rated Power	2000W	3000W	3000W	4000W	5000W	5500W
Surge Power	4000W	6000W	6000W	8000W	10000W	11000W
Waveform	Pure Sine Wave					
AC Voltage Regulation (Batt.Mode)	(220VAC~240VAC)±5%					
Inverter Efficiency(Peak)	93%					
Transfer Time	10ms (UPS / VDE4105) 20ms (APL)					
AC INPUT						
Voltage	230VAC					
Selectable Voltage Range	170~280VAC(UPS) / 90~280VAC(APL) / 184~253VAC(VDE4105)					
Frequency Range	50Hz / 60Hz(Auto sensing)					
BATTERY						
Normal Voltage	24VDC			48VDC		
Floating Charge Voltage	27.4VDC			54.8VDC		
Overcharge Protection	30VDC			60VDC		
SOLAR CHARGER & AC CHARGER						
Maximum PV Array Open Circuit Voltage	145VDC					
PV Array MPPT Voltage Range	30~130VDC			60~130VDC		
Standby Power Consumption	2W					
PV Input Power	2000W			4000W		
Maximum Solar Charge Current	80A					
Maximum Efficiency	98%					
Maximum AC Charge Current	20A/30A			60A		
Maximum Charge Current	80A			140A		
MECHANICAL SPECIFICATIONS						
Machine Dimension (W*H*D)(mm)	300*414*116			329*485*134		
Package Dimension (W*H*D)(mm)	/			/		
N.W (kg)	/			/		
G.W (kg)	/			/		
OTHER						
Humidity	5% to 95% Relatly Humidity (Non-condensing)					
Operating Temperature	0°C~50°C					
Storage Temperature	-15°C ~60°C					
Warranty	2 year					
CERTIFICATION & STANDARDS						
CE-LVD (IEC62109-1:2010, EN IEC62109-2); UKCA						

*The technical specifications of this document are subject to change without any notice

HIGH FREQUENCY SOLAR INVERTER PV1800 VHM Series

3~5.5KW | MPPT 80A | PV 250V


PV1800 VHM is a multi-functional inverter/charger, combining functions of inverter, solar charger and battery charger to offer uninterruptible power support in portable size. Its comprehensive LCD display offers user-configurable and easy-accessible button operation such as battery charging current, AC/solar charger priority, and acceptable input voltage based on different applications.




- Rated power : 3KW -5.5KW
- Pure sine wave solar inverter
- Max PV Array Open Circuit Voltage: 250V
- Output power factor 1
- Built-in 80A MPPT solar charger
- Support parallel operation up to 3 units
- Communication CAN/485 port for BMS (optional)
- PV lithium battery activation function
- WIFI remote monitoring (optional)
- Compatible to generator



Back panel description

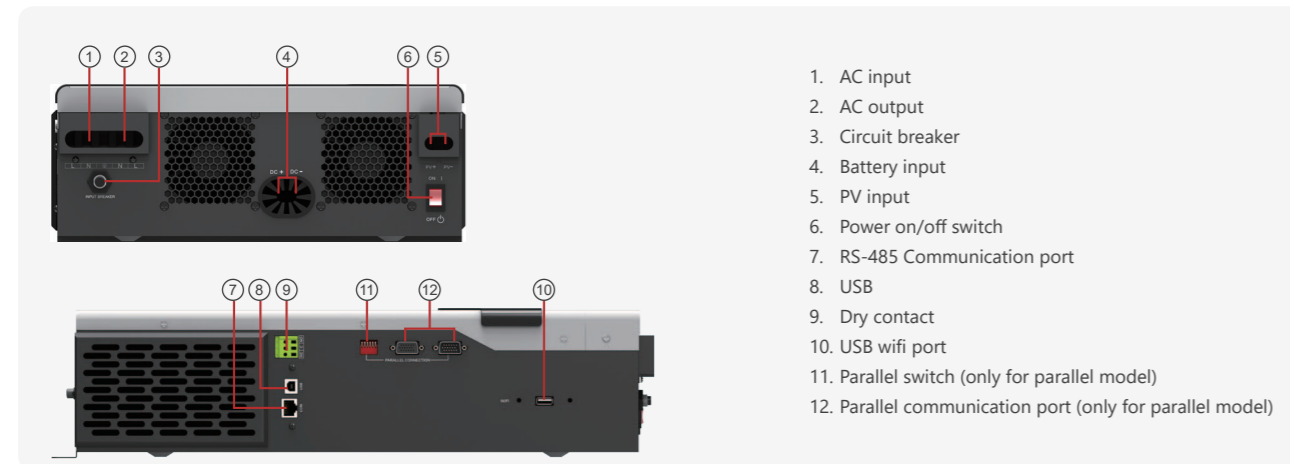

Solar system connection

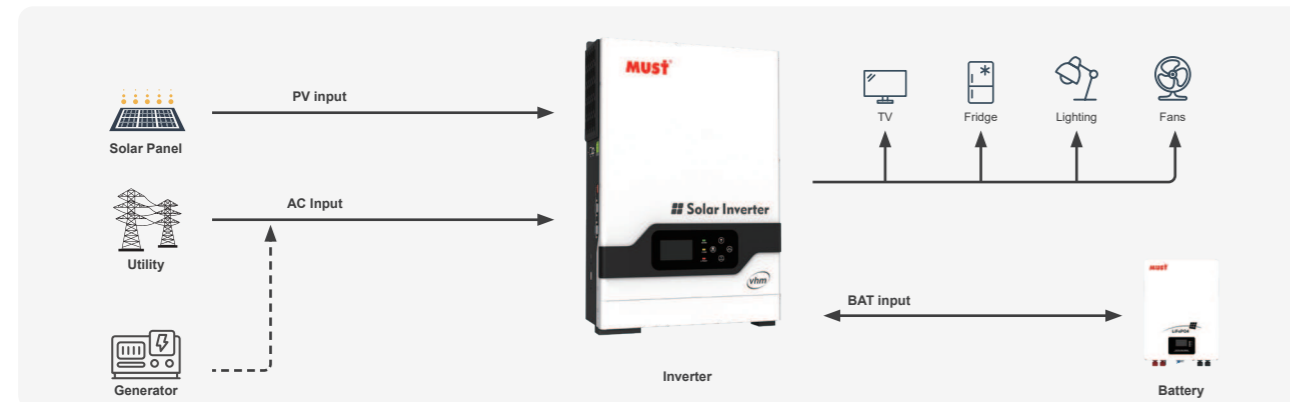

MODEL	PV18-3048 VHM	PV18-4048 VHM	PV18-5048 VHM	PV18-5548 VHM
Nominal Battery System Voltage	48VDC			
INVERTER OUTPUT				
Rated Power	3000W	4000W	5000W	5500W
Surge Power	6000W	8000W	10000W	11000W
Waveform	Pure Sine Wave			
AC Voltage Regulation (Batt.Mode)	(220VAC~240VAC)±5%			
Inverter Efficiency(Peak)	93%			
Transfer Time	10ms (UPS / VDE4105) 20ms (APL)			
AC INPUT				
Voltage	230VAC			
Selectable Voltage Range	170~280VAC(UPS) / 90~280VAC(APL) / 184~253VAC(VDE4105)			
Frequency Range	50Hz / 60Hz(Auto sensing)			
BATTERY				
Normal Voltage	48VDC			
Floating Charge Voltage	54.8VDC			
Overcharge Protection	60VDC			
SOLAR CHARGER & AC CHARGER				
Maximum PV Array Open Circuit Voltage	250VDC			
PV Array MPPT Voltage Range	60~200VDC			
Standby Power Consumption	2W			
PV Input Power (STC)	4500W			
Maximum Solar Charge Current	80A			
Maximum Efficiency	98%			
Maximum AC Charge Current	60A			
Maximum Charge Current	140A			
MECHANICAL SPECIFICATIONS				
Machine Dimension (W*H*D)(mm)	329*485*134			
Package Dimension (W*H*D)(mm)	/			
N.W (kg)	/			
G.W (kg)	/			
OTHER				
Humidity	5% to 95% Relatiy Humidity (Non-condensing)			
Operating Temperature	0°C~50°C			
Storage Temperature	-15°C ~60°C			
Warranty	2 year			
CERTIFICATION & STANDARDS				
CE-LVD (IEC62109-1:2010, EN IEC62109-2); UKCA				

*The technical specifications of this document are subject to change without any notice

HIGH FREQUENCY SOLAR INVERTER PV1800 PREM Series

2~6.2KW | Dual output | WiFi | Bluetooth


PV1800 PREM is a multi-function inverter/charger, combining functions of inverter, MPPT solar charger and battery charger to offer uninterruptible power support in portable size. PV1800 PREM Series can run without battery. The Maximum PV array open circuit voltage can reach 400V/450V. which Can help customers make full use of solar energy.




- Pure sine wave output
- Smart LCD setting (Working modes, Charge Current, Charge Voltage, etc).
- Built-in MPPT solar charge controller
- Combining solar system, AC utility, and battery power source to supply continuous power
- Overload, short circuit and Deep discharge protection
- Cold start function
- Support USB, RS485, CAN monitoring function
- WIFI remote monitoring (Built in wifi and bluetooth module and antenna)
- PV/ AC activation function
- BMS communication function (CAN Port)
- Dual output for smart load management



Back panel description

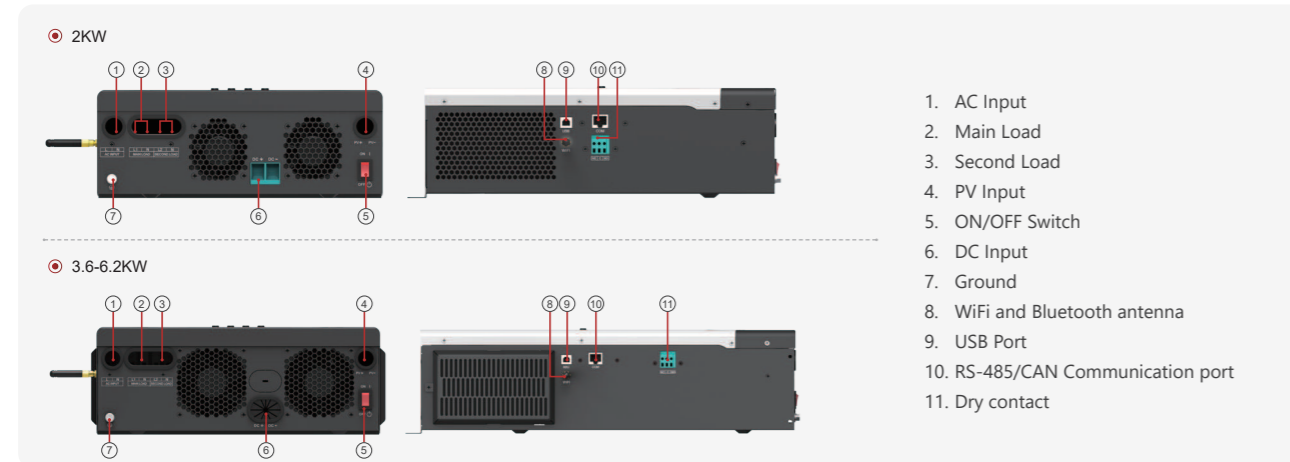

Solar system connection

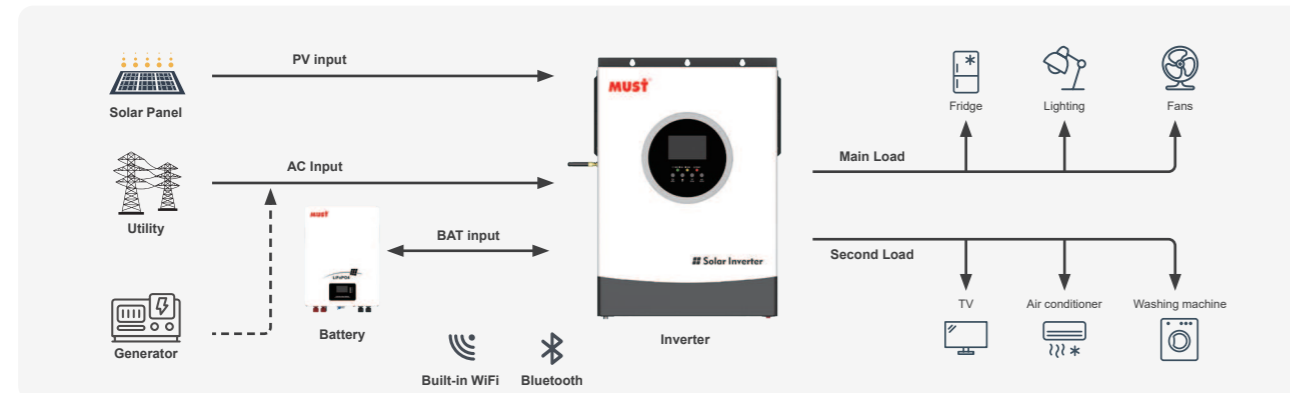

MODEL	PV18-2012 PREM	PV18-3624 PREM	PV18-4024 PREM	PV18-6248 PREM
Nominal Battery System Voltage	12VDC	24VDC	24VDC	48VDC
INVERTER OUTPUT				
Rated Power (Main+Second Load)	2000VA/2000W	3600VA/3600W	4000VA/4000W	6200VA/6200W
Battery Mode (Main+Second Load)	2000VA/1600W	3000VA/3000W	3500VA/3500W	5500VA/5500W
Surge Power	3200W	6000W	7000W	11000W
Waveform	Pure sine wave			
AC Voltage Regulation (Batt.Mode)	230VAC±5%(Setting)			
Inverter Efficiency(Peak)	90~93%			
Transfer Time	10ms (UPS / VDE4105) / 20ms (APL)			
AC INPUT				
Voltage	230VAC±5%			
Selectable Voltage Range	170~280VAC(UPS) / 90~280VAC(APL) / 184~253VAC(VED4105)			
Frequency Range	50Hz / 60Hz(Auto sensing)			
BATTERY				
Normal voltage	12VDC	24VDC	24VDC	48VDC
Floating Charge Voltage	13.7VDC	27.4VDC	27.4VDC	54.8VDC
Overcharge Protection	15VDC	30VDC	30VDC	60VDC
SOLAR CHARGER & AC CHARGER				
Maximum PV Array Open Circuit Voltage	400VDC	400VDC	450VDC	450VDC
Maximum PV Input Current	16A	18A	18A	28A
Charging Algorithm	3-Step (Flooded Battery, AGM / GEL / LEAD Battery), 4-Step (Li)			
Maximum PV Array Power	2000W	4000W	4000W	6000W
PV Array MPPT Voltage Range(Typ.)	30~320VDC		60~360VDC	
Maximum Solar Charge Current	80A	100A	100A	100A
Maximum AC Charge Current	80A	60A	60A	100A
Maximum Charge Current	80A	100A	100A	100A
MECHANICAL SPECIFICATIONS				
Machine Dimension (W*H*D)(mm)	290*367*111		318*454*122.5	
Package Dimension (W*H*D)(mm)	446*394*187		544.5*410*200	
N.W (kg)	6	7.8	8.0	9.0
G.W (kg)	7.2	9.3	9.5	10.2
OTHER				
Humidity	5% to 95% Relative humidity (Non-condensing)			
Operating Temperature	-10°C~50°C			
Storage Temperature	-15°C~60°C			
Communication Interface	USB/WIFI/Bluetooth/RS-485/CAN			
Warranty	2years			
Anti-dust Kit	none	yes	yes	yes
CERTIFICATION & STANDARDS				
CE-EMC+LVD (EN6100-6-3, EN6100-6-1+EN IEC62109-1, EN IEC62109-2)				

*The technical specifications of this document are subject to change without any notice

HIGH FREQUENCY SOLAR INVERTER PV1800 VPM II Series

1~4KW | 24V | 40~60A



This is a multi-function inverter/charger, combining functions of inverter, MPPT 40A/60A solar charge controller and battery charger to offer uninterrupted power support with portable size. Its comprehensive LCD display offers user-configurable and easy-accessible button operation such as battery charging current, AC/solar charger priority, and acceptable input voltage based on different applications.



- Smart LCD setting (Working modes, Charge Current, Charge Voltage, etc).
- Built in MPPT 40A/60A solar charge controller
- Combining solar system, AC utility, and battery power source to supply continuous power
- Overload, short circuit and Deep discharge protection
- Cold start function
- Support USB, RS485, CAN monitoring function
- WIFI remote monitoring (optional)
- Compatible to generator
- PV/ AC activation function
- Smart battery pack BMS communication function (CAN Port)


Back panel description

● 1.2KW

● 3.5KW/4KW

1. AC output
2. AC input
3. Circuit breaker
4. PV input
5. Battery input
6. Power on/off switch
7. Dry contact
8. USB Communication port
9. RS-485,CAN Communication port
10. USB WiFi port (optional)
11. Ground

Solar system connection

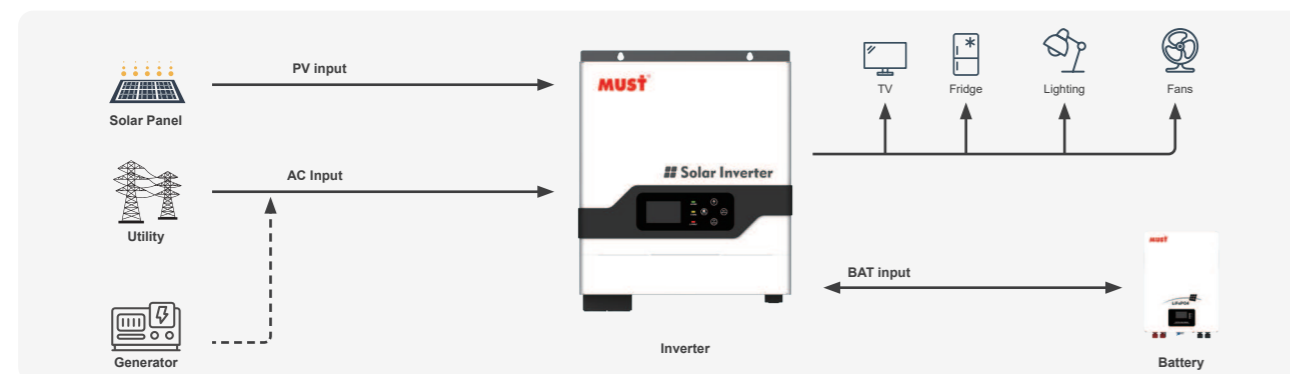

MODEL	PV18-1012 VPM II	PV18-1512 VPM II	PV18-1224 VPM II	PV18-2224 VPM II	PV18-3224 VPM II	PV18-3524 VPM II	PV18-4024 VPM II
Default Battery System Voltage	12VDC	12VDC	24VDC	24VDC	24VDC	24VDC	24VDC
INVERTER OUTPUT							
Rated Power	1000VA/1000W	1500VA/1500W	1200VA/1200W	2200VA/2200W	3200VA/3200W	3500VA/3500W	4000VA/4000W
Surge Power	2000VA	3000VA	2400VA	4400VA	6400VA	7000VA	8000VA
Waveform	Pure sine wave						
AC Voltage Regulation (Batt.Mode)	230VAC						
Inverter Efficiency(Peak)	90%~93%						
Transfer Time	10ms(UPS / VDE4105) / 20ms(APL)						
AC INPUT							
Voltage	230VAC						
Selectable Voltage Range	170~280VAC(UPS) / 90~280VAC(APL) / 184~253VAC(VDE)						
Frequency Range	50Hz / 60Hz (Auto sensing)						
BATTERY							
Normal voltage	12VDC				24VDC		
Floating Charge Voltage	13.8VDC				27.4VDC		
Overcharge Protection	15VDC				30VDC		
SOLAR CHARGER & AC CHARGER							
Maximum PV Array Open Circuit Voltage	105VDC	145VDC	120VDC	160VDC	160VDC	160VDC	160VDC
PV Array MPPT Voltage Range (Typ.)	15~75VDC	15~130VDC	30~96VDC	30~128VDC	30~128VDC	30~128VDC	30~128VDC
Standby Power Consumption	2W						
Maximum PV Array Power	600W	720W	1000W	1600W	1600W	1600W	1600W
Maximum Solar Charge Current	45A	60A	40A	60A	60A	60A	60A
Maximum Efficiency	98%						
Maximum AC Charge Current	20A	20A	30A	40A	60A	60A	60A
Maximum Charge Current	65A	70A	70A	100A	120A	120A	120A
MECHANICAL SPECIFICATIONS							
Machine Dimension (W*H*D) (mm)	224*337*98	255*318*110	224*337*98	254.5*367.4*103	254.5*367.4*103	318*367.4*121	318*367.4*121
Package Dimension (W*H*D) (mm)	300*410*178	355*402*206	299*292*184	436*331*189	436*331*189	549*410*200	549*410*200
N.W (kg)	3.6	5.5	4.7	5.5	5.5	5.9	5.9
G.W (kg)	4.3	6.0	5.5	6.5	6.5	7.2	7.2
OTHER							
Humidity	5% to 95% Relativ Humidity (Non-condensing)						
Operating Temperature	0°C~50°C						
Storage Temperature	-15°C -60°C						
Communication Interface	USB/WIFI (optional)						
Warranty	2years						
CERTIFICATION & STANDARDS							
CE-EMC+LVD(EN6100-6-3, EN6100-6-1+EN IEC62109-1, EN IEC62109-2)							

*The technical specifications of this document are subject to change without any notice

HIGH FREQUENCY SOLAR INVERTER PV1800 VM Series

2.5~3KW | 24V | 40~60A

This is a multi-function inverter/charger, combining functions of inverter, MPPT 60A solar charger and battery charger to offer uninterruptible power support with portable size. Its comprehensive LCD display offers user-configurable and easy-accessible button operation such as battery charging current, AC/solar charger priority, and acceptable input voltage based on different applications.




- Smart LCD setting (Working modes, Charge Current, Charge Voltage, etc).
- Built in MPPT 40A/60A solar charge controller
- Combining solar system, AC utility, and battery power source to supply continuous power
- Overload, short circuit and Deep discharge protection
- Cold start function
- Support USB, RS485, CAN monitoring function
- WIFI remote monitoring (optional)
- Compatible to generator

Back panel description



Solar system connection

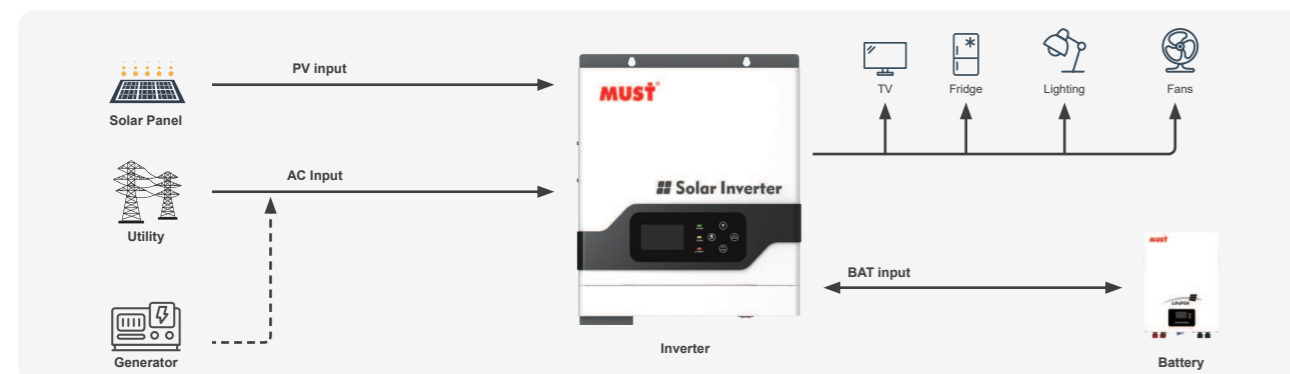

MODEL	PV18-2524 VM	PV18-3024 VM
Default Battery System Voltage	24VDC	
INVERTER OUTPUT		
Rated Power	2500VA / 2000W	3000VA / 2500W
Surge Power	5000VA	6000VA
Waveform	Pure sine wave	
AC Voltage Regulation (Batt.Mode)	220VAC~240VAC(Setting)	
Inverter Efficiency(Peak)	90%~93%	
Transfer Time	10ms(UPS / VDE4105) / 20ms(APL)	
AC INPUT		
Voltage	230VAC	
Selectable Voltage Range	170~280VAC(UPS) / 90~280VAC(APL) / 184~253VAC(VDE)	
Frequency Range	50Hz / 60Hz (Auto sensing)	
BATTERY		
Normal voltage	24VDC	
Floating Charge Voltage	27.4VDC	
Overcharge Protection	30VDC	
SOLAR CHARGER & AC CHARGER		
Maximum PV Array Open Circuit Voltage	145VDC	
PV Array MPPT Voltage Range	30~120VDC	
Standby Power Consumption	2W	
Maximum PV Array Power	1500W	
Maximum Solar Charge Current	60A	
Maximum Efficiency	98%	
Maximum AC Charge Current	10A or 20A	
Maximum Charge Current	70A	
MECHANICAL SPECIFICATIONS		
Machine Dimension (W*H*D)(mm)	225*355*92	290*342*125
Package Dimension (W*H*D)(mm)	/	/
N.W (kg)	/	/
G.W (kg)	/	/
OTHER		
Humidity	5% to 95% Relativ Humidity (Non-condensing)	
Operating Temperature	0°C~50°C	
Storage Temperature	-15°C -60°C	
Warranty	2years	
CERTIFICATION & STANDARDS		
CE		

*The technical specifications of this document are subject to change without any notice

HIGH FREQUENCY SOLAR INVERTER PV1900 EXP Series




4~6KW | 500V | 100~120A | Dual output | WiFi | 9pcs parallel

PV1900 EXP is a multi-function inverter/charger, combining functions of inverter, MPPT solar charger and battery charger to offer uninterruptible power support in portable size. PV1900 EXP Series can run without battery. The Maximum PV array open circuit voltage can reach 500V and MPPT voltage is 150~450Vdc, which Can help customers make full use of solar energy.




- Pure sine wave output
- Smart LCD setting (Working modes, Charge Current, Charge Voltage, etc).
- Built-in MPPT solar charge controller
- MAX PV Array Open Circuit Voltage: 500V (450V for parallel)
- Can provide the power to the load without battery
- Combining solar system, AC utility, and battery power source to supply continuous power
- Overload, short circuit and Deep discharge protection
- Cold start function
- Support USB, RS485 monitoring function
- Parallel operation with up to 9 units (for 48V mode)
- WIFI remote monitoring (optional)
- Dual outputs for smart load management(optional)
- Can communicate with lithium batteries

Back panel description

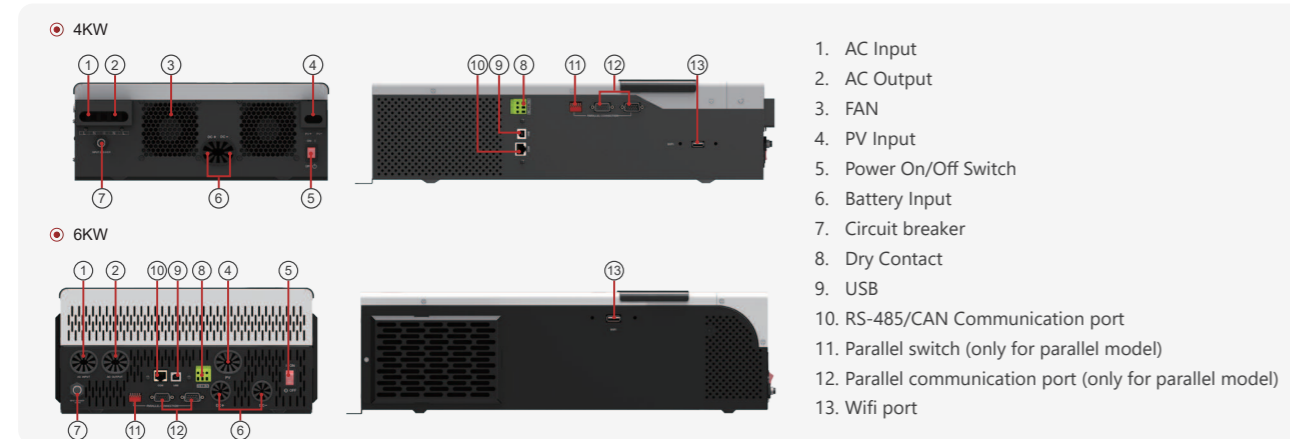

Solar system connection

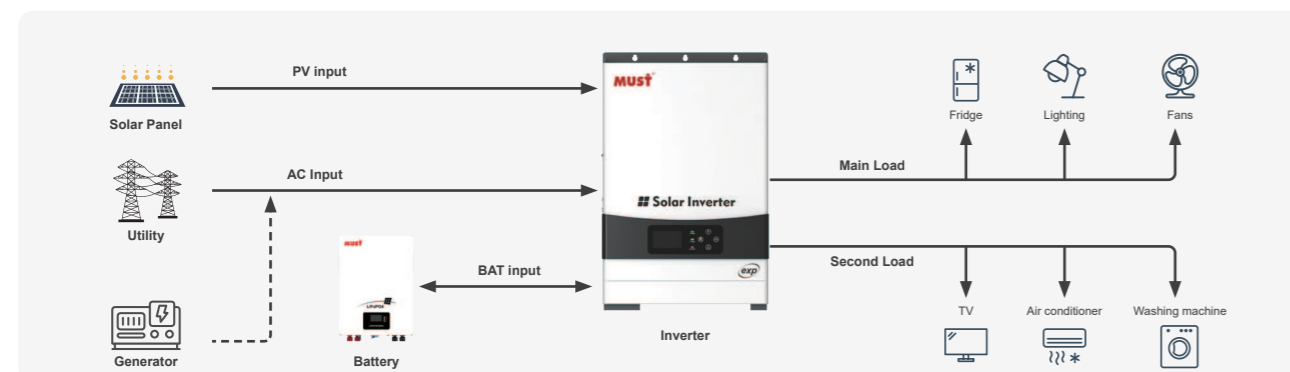

MODEL	PV19-4024 EXP	PV19-6048 EXP
Default Battery System Voltage	24VDC	48VDC
INVERTER OUTPUT		
Rated Power	4000VA / 4000W	6000VA / 6000W
Surge Power	8000W	12000W
Waveform	Pure sine wave	
AC Voltage Regulation (Batt.Mode)	230VAC±5%(Setting)	
Inverter Efficiency(Peak)	92%	
Transfer Time	10ms(UPS / VDE4105) / 20ms(APL)/ < 50ms typical (For parallel operation)	
AC INPUT		
Voltage	230VAC	
Selectable Voltage Range	170~280VAC(UPS) / 90~280VAC(APL) / 184~253VAC(VDE)	
Frequency Range	50Hz / 60Hz (Auto sensing)	
BATTERY		
Normal voltage	24VDC	48VDC
Floating Charge Voltage	27.4VDC	54.8VDC
Overcharge Protection	30VDC	60VDC
SOLAR CHARGER & AC CHARGER		
Maximum PV Array Open Circuit Voltage	500VDC (450V for parallel)	
Charging Algorithm	3-Step (Flooded Battery, AGM / GEL / LEAD Battery), 4-Step (Li)	
Maximum PV Array Power	5000W	6000W
PV Array MPPT Voltage Range	90~430VDC	120~430 VDC
Maximum Solar Charge Current	100A	120A
Maximum AC Charge Current	80A	100A
Maximum Charge Current	100A	120A
MECHANICAL SPECIFICATIONS		
Machine Dimension (W*H*D)(mm)	322*486*134	309*505*147
Package Dimension (W*H*D)(mm)	575*229*425	603*260*400
N.W (kg)	9.5	12.5
G.W (kg)	12	13.8
OTHER		
Humidity	5% to 95% Relativ Humidity (Non-condensing)	
Operating Temperature	0°C~50°C	
Storage Temperature	-15°C~60°C	
Communication Interface	USB/ WIFI	
Warranty	2 year	

CERTIFICATION & STANDARDS

CE-EMC+LVD (EN6100-6-3:2007, EN6100-6-1:2017+EN IEC62109-1:2010, EN IEC62109-2:2011)
 EN IEC62368-1:2020+A11:2020
 CE-LVD (IEC62109-1:2010, EN IEC62109-2:2011)
 EN IEC62368-1:2018, EN IEC62109-1:2010, EN IEC62109-2:2011

*The technical specifications of this document are subject to change without any notice

HIGH FREQUENCY SOLAR INVERTER PV1900 EXP Series

6.2~12KW | PV500V | 120A~150A | Dual output




PV1900 EXP is a multi-function inverter/charger, combining functions of inverter, MPPT solar charger and battery charger to offer uninterruptible power support in portable size. PV1900 EXP Series can run without battery. The Maximum PV input voltage can reach 500V and MPPT voltage range is 90~450Vdc, built-in two MPPTs solar charge controller, which can help customers make full use of solar energy.




- Dual output for smart load management
- Smart color LCD setting (Working modes, Charge Current, Charge Voltage, etc.)
- Built-in Two MPPTs solar charge controller
- Wide MPPT voltage range is 90~450V, the maximum PV input voltage can reach 500V (450V for parallel)
- Can provide the power to the load without battery
- Combining solar system, AC utility, and battery power source to supply continuous power
- Overload, short circuit and Deep discharge protection
- With BMS lithium battery communication function
- With AC/PV lithium battery activation function
- Support USB, RS485 monitoring function
- Parallel operation up to 6 units
- WIFI remote monitoring

Back panel description

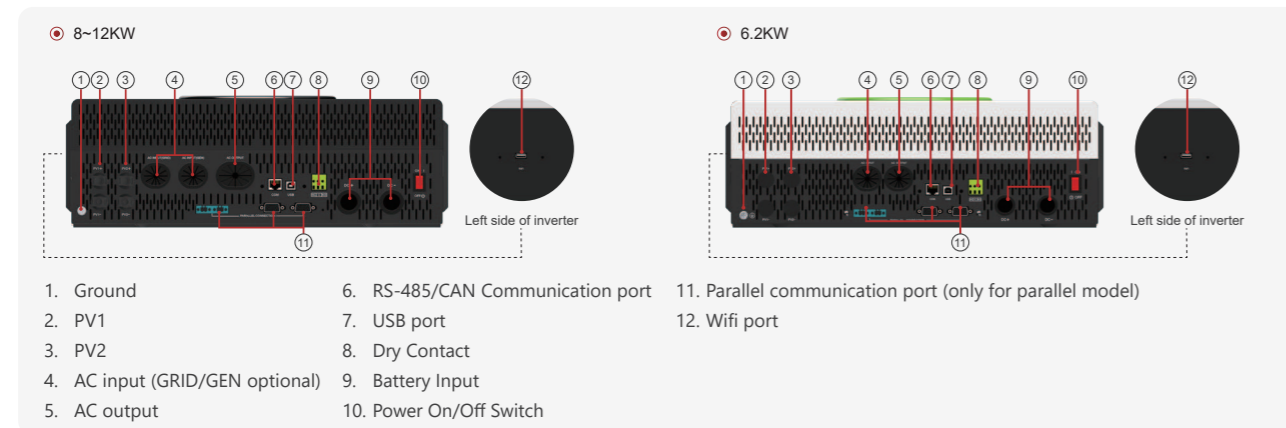

Solar system connection

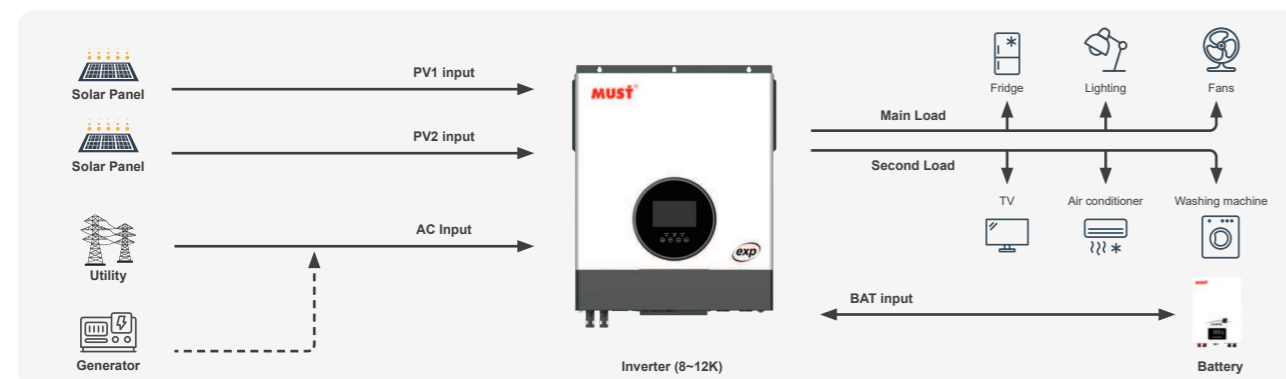

MODEL	PV19-6248 EXP	PV19-8048 EXP	PV19-10048 EXP	PV19-11048 EXP	PV19-12048 EXP
Default Battery System Voltage	48VDC				
INVERTER OUTPUT					
Rated Power	6200VA/6200W	8000VA/8000W	10000VA/10000W	11000VA/11000W	12000VA/12000W
Surge Power	12400W	16000W	20000W	22000W	24000W
Waveform	Pure sine wave				
AC Voltage Regulation (Batt.Mode)	230VAC±5%(Setting)				
Inverter Efficiency(Peak)	92%				
Transfer Time	10ms(UPS / VDE4105) / 20ms(APL)				
AC INPUT					
Voltage	230VAC				
Selectable Voltage Range	170~280VAC(UPS) / 90~280VAC(APL) / 184~253VAC(VDE)				
Frequency Range	50Hz / 60Hz (Auto sensing)				
BATTERY					
Normal voltage	48VDC				
Floating Charge Voltage	54.8VDC				
Overcharge Protection	60VDC				
SOLAR CHARGER & AC CHARGER					
Maximum PV Array Open Circuit Voltage	500VDC (450V for parallel)				
Charging Algorithm	3-Step (Flooded Battery, AGM / GEL / LEAD Battery), 4-Step (Li)				
Maximum PV Array Power	4000W*2	4000W*2	5000W*2	6000W*2	6000W*2
Maximum PV Input Current	18A*2	18A*2	27A*2(40A max)	27A*2(40A max)	27A*2(40A max)
PV Array MPPT Voltage Range	90~450VDC (90~430VDC for parallel)				
Maximum Solar Charge Current	120A	120A	150A	150A	150A
Maximum AC Charge Current	100A	120A	150A	150A	150A
Maximum Charge Current	120A	120A	150A	150A	150A
MECHANICAL SPECIFICATIONS					
Machine Dimension (W*H*D)	425*473*145mm		425*527*145mm		
Package Dimension (W*H*D)	/	/	/	/	/
N.W (kg)	/	/	/	/	/
G.W (kg)	/	/	/	/	/
OTHER					
Humidity	5% to 95% Relativ Humidity (Non-condensing)				
Operating Temperature Range	0°C~50°C				
Storage Temperature Range	-15°C ~60°C				
Warranty	2 year				
CERTIFICATION & STANDARDS					
CE-EMC+LVD (EN6100-6-3:2007, EN6100-6-1:2017+EN IEC62109-1:2010, EN IEC62109-2:2011) EN IEC62368-1:2020+A11:2020 CE-LVD (IEC62109-1:2010, EN IEC62109-2:2011) EN IEC62368-1:2018, EN IEC62109-1:2010, EN IEC62109-2:2011					

*The technical specifications of this document are subject to change without any notice

LOW FREQUENCY OFF GRID SOLAR INVERTER PV2000 PK Series


1~2KVA | 12V, 24V | 50A PWM

PV2000 PK built-in high efficiency solar controller. AC input voltage range for 140VAC-280VAC with regulated output (AVR) features, PV, AC function, A tracking feature such as power frequency. The output frequency can be set using the keys, AC /PV charging voltage, charge current, AC or PV priority mode, Battery under voltage shut-down point, and so many other functions.




- Pure sine wave output
- Built-in 50A PWM solar charge controller
- Smart LCD setting (frequency , charge voltage, charge current, etc).
- Overload and short-circuit protection
- Deep discharge protection
- Cold start function
- Support USB/RS232 monitoring function

Back panel description

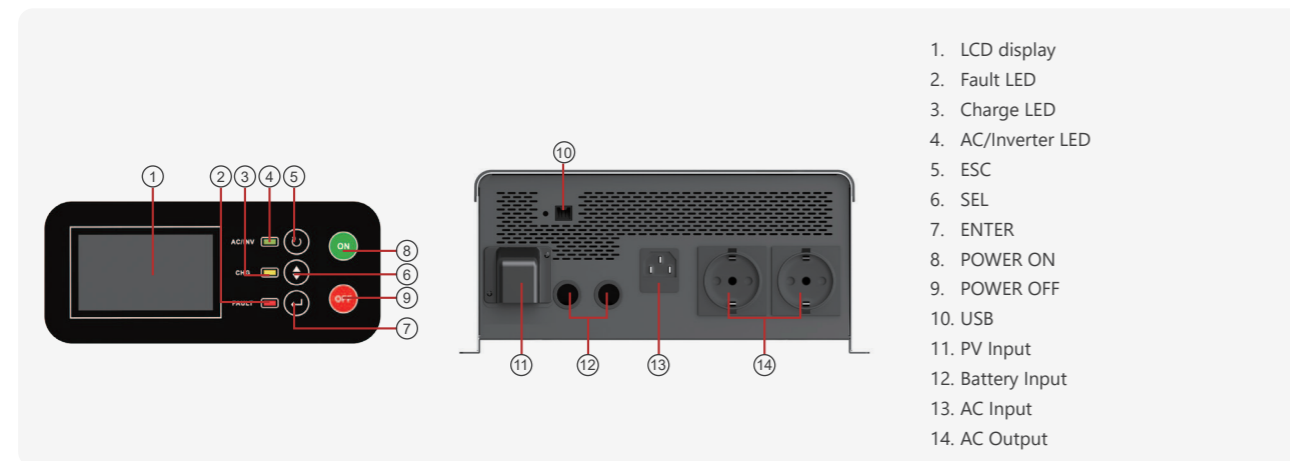

Solar system connection

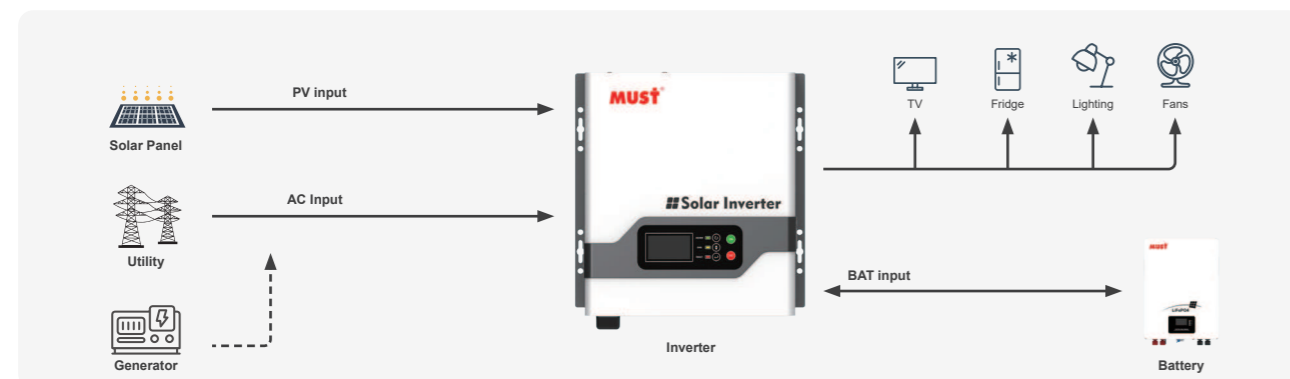

MODEL	PV20-1012 PK	PV20-1512 PK	PV20-2024 PK
Battery Input Voltage Rating	12VDC		24VDC
INVERTER OUTPUT			
Rated Power	1000VA	1500VA	2000VA
Instantaneous Power Draw	700W	900W	1200W
Output Waveform	Pure sine wave		
Output Voltage	Inverter mode: 230VAC(±5% RMS), AVR mode: 200VAC-240VAC 220VAC(±5% RMS)		
Output Power Factor	0.7	0.6	
Output Frequency	50Hz/60Hz ±0.2 Hz		
Inverting Efficiency (peak)	>85%		
Mains Mode Efficiency	> 95%		
Transfer Time	Typical 2~6ms 10ms(max)		
AC INPUT			
Input Voltage	220/230VAC		
Input Voltage Range	140~280VAC±5%		
Low Pressure Shutdown	140VAC±5%		
High Pressure Shutdown	280VAC±5%		
Low Frequency Shutdown	45±0.2Hz(50Hz)		
High Frequency Shutdown	65±0.2Hz(60Hz)		
Frequency Range	50Hz/60Hz ±0.2Hz		
BATTERY			
Minimum Start Voltage	Battery under voltage shut-down point +0.5V	Battery under voltage shut-down point +1.0V	
Low Battery Alarm	Battery under voltage shut-down point +0.5V	Battery under voltage shut-down point +1.0V	
Low Battery Shutdown	(0.1V / 10-12.0VDC mode) User set	(0.2V / 20.0-24.0VDC mode) User set	
Battery High Voltage Alarm	Average Charge Voltage+1V	Average Charge Voltage +2V	
AC CHARGER			
Float Voltage	13.5~14.5VDC to set	27~29VDC to set	
Average Charge Voltage	(0.1V each click ,13.8~14.5V mode) User set	(0.2V each click , 27.6~29V mode) User set	
Maximum Charge Current	20A±2A	25A±2A	15A±2A
BYPASS & PROTECTION			
Input Frequency	50Hz / 60Hz		
Low Frequency Switching	45±1Hz		
High Frequency Switching	65±1Hz		
Overload Protection	110%~125%R load fault after 60s 125% ~150%R load fault after 3s >150%R load fault after 500ms		
Output Short Circuit Protection	Yes		
Bypass Circuit Breaker Insurance	10A		
Maximum Current Bypass	10A	10A	
SOLAR CHARGER			
Maximum PV Charge Current	50A±5A		
Battery Voltage	12VDC	24VDC	
Maximum PV Array Power	150W*5 solar panels	150W*10 solar panels	
Maximum PV Array Open Circuit Voltage	55Vdc		
Maximum Efficiency	> 95%		
Standby Consumption	<2W		
MECHANICAL SPECIFICATIONS			
Assembly	Wall mount		
Machine Dimension (W*H*D)	300.5*319*132.2mm		
Package Dimension (W*H*D)	391*325*187mm		
N.W (kg)	/		
G.W (kg)	/		
OTHER			
Working Environment	0°C~40°C 0~90% Relative humidity (non-condensing)		
Noise	Less than 60db		
Display	LED + LCD		
CERTIFICATION & STANDARDS			
CE-EMC+LVD(EN6100-6-4:2007, EN6100-6-2:2005+EN IEC62109-1:2010, EN IEC62109-2:2011)			

*The technical specifications of this document are subject to change without any notice

LOW FREQUENCY SOLAR INVERTER PV2900 HP Series


1~6KW | AC 230V | MPPT80A | WIFI | BMS | Dual output

PV2900 HP series is very economical pure sine wave solar inverter, Inbuilt with 80A MPPT charger; Solar/AC priority is configurable, when setting solar priority, solar will charge batteries as first priority, and AC can also charge batteries when solar charger current is too lower, in this way system charge is optimized best. it enables inverter to operate with all kinds of home appliances.




- 3 Steps charging
- Overload and short-circuit protection
- Set charging voltage/charging current
- Battery low voltage shutdown point can be set to 10/10.5/11/11.5/12V
- Power-save mode
- Set utility priority /battery priority
- Set utility input wide/narrow voltage range
- Inverter voltage can be set to 220V/230V/240V
- Inverter frequency can be set to 50Hz/60Hz
- Set utility charging on/off switch
- Inbuilt 80A MPPT Solar Charge Controller
- Acid or Lithium Select
- WIFI remote monitoring (optional)
- With BMS lithium battery communication function (CAN port)
- Dual output for smart load management

Back panel description

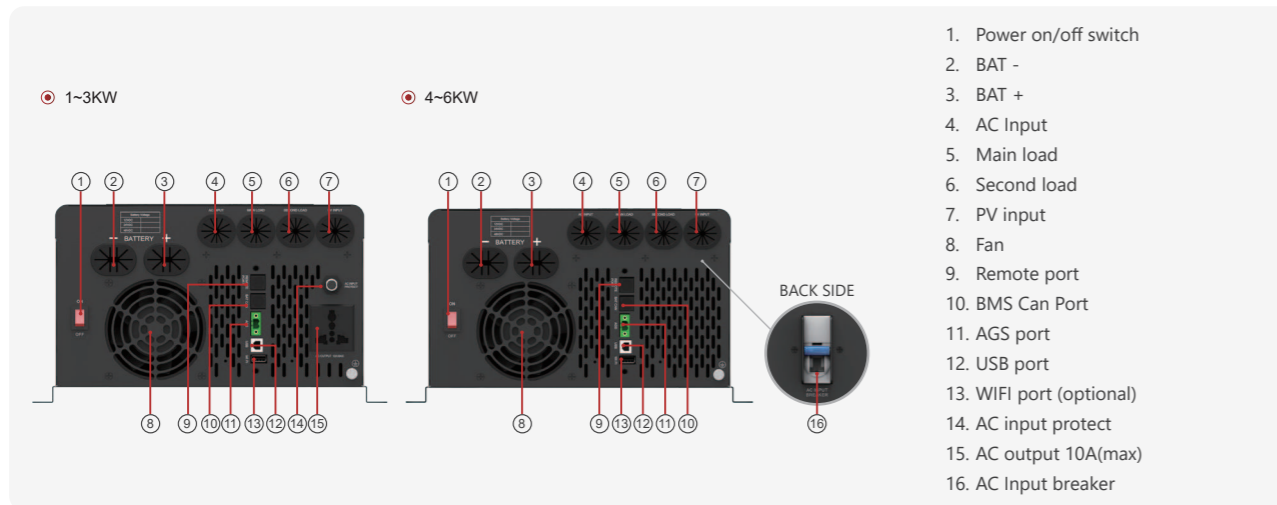

1. Power on/off switch
2. BAT -
3. BAT +
4. AC Input
5. Main load
6. Second load
7. PV input
8. Fan
9. Remote port
10. BMS Can Port
11. AGS port
12. USB port
13. WIFI port (optional)
14. AC input protect
15. AC output 10A(max)
16. AC Input breaker

Solar system connection

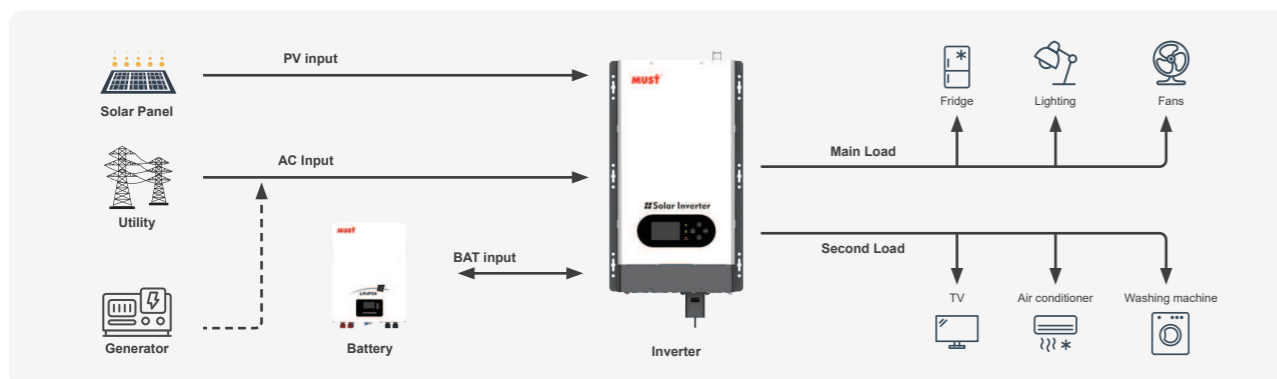

MODEL	PV29-1KW-HP		PV29-1.5KW-HP		PV29-2KW-HP		PV29-3KW-HP		PV29-4KW-HP		PV29-5KW-HP		PV29-6KW-HP		
Nominal Battery System Voltage	12VDC	24VDC	12VDC	24VDC	12VDC	24VDC	24VDC	48VDC	24VDC	48VDC	48VDC		48VDC		
INVERTER OUTPUT															
Rated Power	1 KW		1.5 KW		2 KW		3 KW		4 KW		5 KW		6 KW		
Surge Rating	3000VA		4500VA		6000VA		9000VA		12000VA		15000VA		18000VA		
Capable Of Starting Electric Motor	1P		1P		1.5P		2P				3P				
Waveform	Pure sine wave / same as input (bypass mode)														
Nominal Output Voltage RMS	220V / 230V / 240VAC (±10% RMS)														
Output Frequency	50Hz / 60Hz ±0.3Hz														
Inverter Efficiency (Peak)	>88%														
Line Mode Efficiency	>95%														
Power Factor	1.0														
Typical Transfer Time	10ms(max)														
Overload	100% < Load < 110% (alarm 5min then stop output and fault code 07) 110% < Load < 125% (alarm 60s then stop output and fault code 07) Load > 125% (alarm 10s then stop output and fault code 07)														
AC INPUT															
Voltage	230VAC														
Selectable Voltage Range	155~265VAC(For personal computers)														
Frequency Range	50Hz / 60Hz(Auto sensing) 40~80Hz														
BATTERY															
Minimum Start Voltage	(10V / 10.5V / 11V / 11.5V/ 12V)+0.5V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)														
Low Battery Voltage Alarm	(10V / 10.5V / 11V / 11.5V/ 12V)+0.5V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)														
Low Battery Voltage Cut Off	10V / 10.5V / 11V / 11.5V/ 12V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)														
High Battery Voltage Alarm	(12-14.5V)+1V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)														
High Battery Voltage Recover	(12-14.5V)+0.5V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)														
Energy Saving Mode	Load ≤50±20W(120V)/100±20W(220V)														
CHARGER															
Output Voltage	Depends on battery type														
Overcharge Protection S.D.	15.5VDC for 12VDC mode (*2 for 24VDC mode, *4 for 48VDC mode)														
Maximum Charge Current	30A	20A	45A	25A	60A	30A	40A	20A	60A	30A	35A	40A			
PAYPASS & PROTECTION															
Input Voltage Waveform	Sine wave (grid or generator)														
Nominal Input Frequency	50Hz or 60Hz														
Overload Protection (SMPS Load)	Circuit breaker														
Output Short Circuit Protection	Circuit breaker														
AC Input Breaker	1-3K/30A						4-6K/50A								
SOLAR CHARGER															
Maximum PV Array Power	1250W	2500W	1250W	2500W	1250W	2500W	2500W	5000W	2500W	5000W	5000W	5000W			
Maximum PV Charge Current	80A±4A														
DC Voltage	12V/ 24V auto work						24V/ 48V auto work								
MPPT Range @ Operating Voltage	15~95VDC @ 12V/ 30~230VDC @ 24V						30~230VDC @ 24V/ 60~230VDC @ 48V								
Maximum PV Array Open Circuit Voltage	245VDC														
Standby Power Consumption	<2W														
MECHANICAL SPECIFICATIONS															
Mounting	Wall Mount														
Dimensions (W*H*D)	274*484*174mm						274*568.5*174mm								
Package Dimensions (W*H*D)	583.5*376*255mm						668.5*376*255mm								
N.W (kg)	/						/								
G.W (kg)	/						/								
OTHER															
Operating Temperature Range	0°C ~ 40°C														
Storage Temperature	-15°C ~ 60°C														
Audible Noise	60dB MAX														
Display	LED+LCD														
Standard Warranty	2 year														
CERTIFICATION & STANDARDS															
CE-EMC+LVD (EN6100-6-3:2007, EN6100-6-1:2017+EN IEC62109-1:2010, EN IEC62109-2:2011)															

*The technical specifications of this document are subject to change without any notice

LOW FREQUENCY SOLAR INVERTER PV3000 VHM Series


1~6KW | AC 230V | MPPT80A | WIFI | BMS

PV3000 VHM series is very economical pure sine wave solar inverter, Inbuilt with 80A MPPT charger; Solar/AC priority is configurable, when setting solar priority, solar will charge batteries as first priority, and AC can also charge batteries when solar charger current is too lower, in this way system charge is optimized best. it enables inverter to operate with all kinds of home appliances.




- 3 Steps charging
- Overload and short-circuit protection
- Set charging voltage/charging current
- Battery low voltage shutdown point can be set to 10/10.5/11/11.5/12V
- Power-save mode
- Set utility priority /battery priority
- Set utility input wide/narrow voltage range
- Inverter voltage can be set to 220V/230V/240V
- Inverter frequency can be set to 50Hz/60Hz
- Set utility charging on/off switch
- Inbuilt 80A MPPT Solar Charge Controller
- Acid or Lithium Select
- WIFI remote monitoring (optional)
- With BMS lithium battery communication function (CAN port)

Back panel description

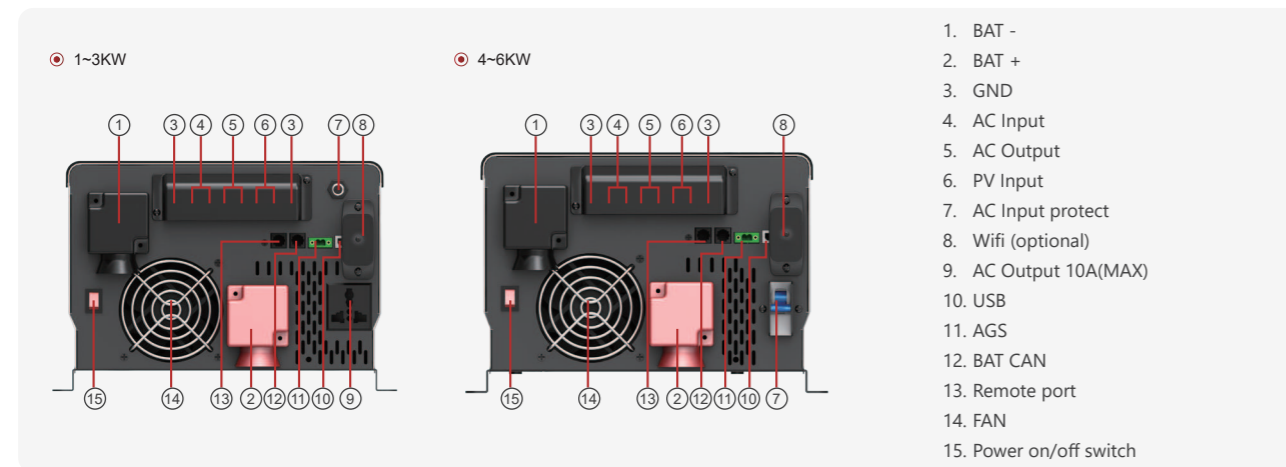

Solar system connection

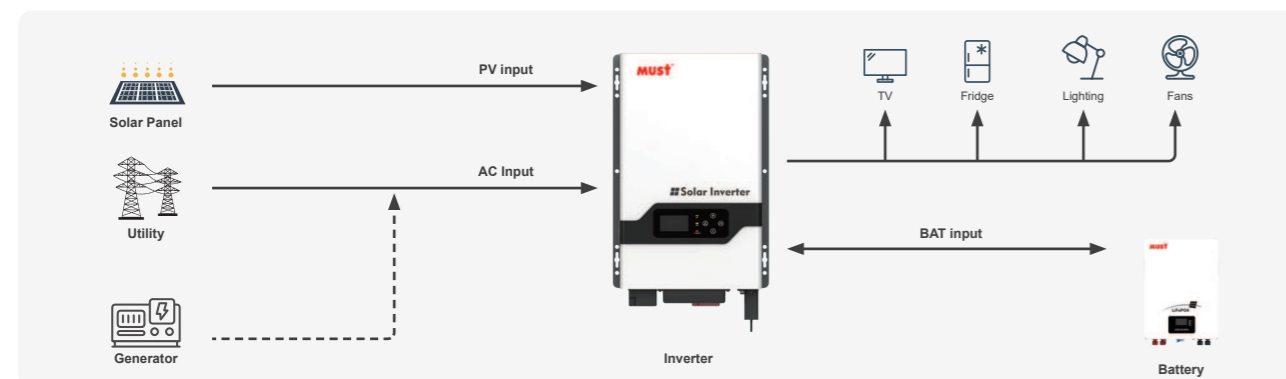

MODEL	PV30-1KW VHM		PV30-1.5KW VHM		PV30-2KW VHM		PV30-3KW VHM		PV30-4KW VHM		PV30-5KW VHM		PV30-6KW VHM	
Nominal Battery System Voltage	12VDC	24VDC	12VDC	24VDC	12VDC	24VDC	24VDC	48VDC	24VDC	48VDC	48VDC	48VDC	48VDC	48VDC
INVERTER OUTPUT														
Rated Power	1 KW		1.5 KW		2 KW		3 KW		4 KW		5 KW		6 KW	
Surge Rating	3000VA		4500VA		6000VA		9000VA		12000VA		15000VA		18000VA	
Capable Of Starting Electric Motor	1HP		1HP		1HP		2HP				3HP			
Waveform	Pure sine wave / same as input (bypass mode)													
Nominal Output Voltage RMS	220V / 230V / 240VAC (±10% RMS)													
Output Frequency	50Hz / 60Hz ±0.3Hz													
Inverter Efficiency (Peak)	>88%													
Line Mode Efficiency	>95%													
Power Factor	1.0													
Typical Transfer Time	10ms(max)													
Overload	100% < Load < 110% (alarm 5min then stop output and fault code 07) 110% < Load < 125% (alarm 60s then stop output and fault code 07) Load > 125% (alarm 10s then stop output and fault code 07)													
AC INPUT														
Voltage	230VAC													
Selectable Voltage Range	155~265VAC(For personal computers)													
Frequency Range	50Hz / 60Hz(Auto sensing) 40~80Hz													
BATTERY														
Minimum start voltage	(10V / 10.5V / 11V / 11.5V/ 12V)+0.5V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)													
Low Battery Voltage Alarm	(10V / 10.5V / 11V / 11.5V/ 12V)+0.5V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)													
Low Battery Voltage Cut Off	10V / 10.5V / 11V / 11.5V/ 12V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)													
High Battery Voltage Alarm	(12-14.5V)+1V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)													
High Battery Voltage Recover	(12-14.5V)+0.5V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)													
Energy Saving Mode	Load ≤50±20W(120V)/100±20W(220V)													
CHARGER														
Output Voltage	Depends on battery type													
Overcharge Protection S.D.	15.7VDC for 12VDC mode (*2 for 24VDC mode, *4 for 48VDC mode)													
Maximum Charge Current	30A	20A	45A	25A	60A	30A	40A	20A	60A	30A	35A	40A		
PAYPASS & PROTECTION														
Input Voltage Waveform	Sine wave (grid or generator)													
Nominal Input Frequency	50Hz or 60Hz													
Overload Protection (SMPS Load)	Circuit breaker													
Output Short Circuit Protection	Circuit breaker													
AC Input Breaker	1-3K/30A							4-6K/50A						
SOLAR CHARGER														
Maximum PV Array Power	1250W	2500W	1250W	2500W	1250W	2500W	2500W	5000W	2500W	5000W	5000W	5000W	5000W	5000W
Maximum PV Charge Current	80A±4A													
DC Voltage	12V/ 24V auto work							24V/ 48V auto work						
MPPT Range @ Operating Voltage	15~95VDC @ 12V/ 30~230VDC @ 24V							30~230VDC @ 24V/ 60~230VDC @ 48V						
Maximum PV Array Open Circuit Voltage	245VDC													
Standby Power Consumption	<2W													
MECHANICAL SPECIFICATIONS														
Mounting	Wall Mount													
Dimensions (W*H*D) (mm)	303*493*200							305*531*202						
Package Dimensions (W*H*D) (mm)	615*400*319							686*400*319						
N.W (kg)	/							/						
G.W (kg)	/							/						
OTHER														
Operating Temperature Range	0°C to 40°C													
Storage Temperature	-15°C to 60°C													
Audible Noise	60dB MAX													
Display	LED+LCD													
Standard Warranty	2 year													
CERTIFICATION & STANDARDS														
CE-EMC+LVD (EN6100-6-3:2007, EN6100-6-1:2017+EN IEC62109-1:2010, EN IEC62109-2:2011)														

*The technical specifications of this document are subject to change without any notice

LOW FREQUENCY SOLAR INVERTER/CHARGER PV3000 VPM Series




1~3KVA | 120/230V | 60A MPPT | WiFi | BMS


PV3000 VPM series is very economical pure sine wave solar inverter, inbuilt with 60A MPPT Charger and AC Charger from 20A to 60A; Solar/AC priority is configurable, when setting solar priority, solar will charge batteries as first priority, and AC can also charge batteries when solar charger current is too lower, in this way system charge is optimized best. It enables inverter to operate with all kinds of home appliances.

- 3 Steps charging
- Overload and short-circuit protection
- Set charging voltage/charging current
- Battery low voltage shutdown point can be set to 10/10.5/11/11.5/12V
- Power-save mode
- Set utility priority/battery priority
- Set utility input wide/narrow range
- Inverter voltage can be set to 110V/115V/120V or 220V/230V/240V
- Inverter frequency can be set to 50Hz/60Hz
- Set utility charging on/off switch
- Inbuilt with 60A MPPT Solar Charge Controller
- Acid or Lithium Select
- WIFI remote monitoring (optional)
- With BMS lithium battery communication function (CAN port)

Back panel description

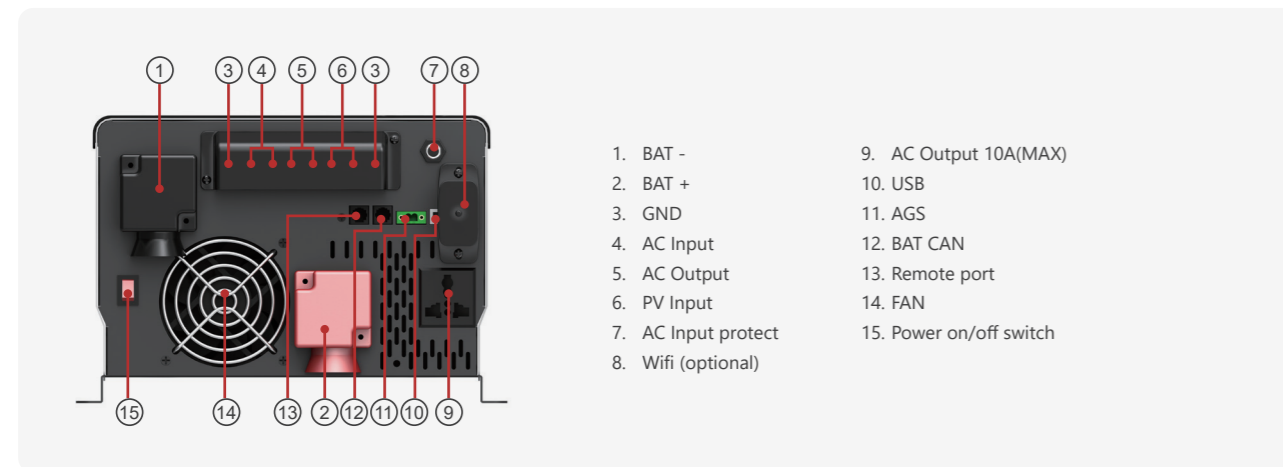

Solar system connection

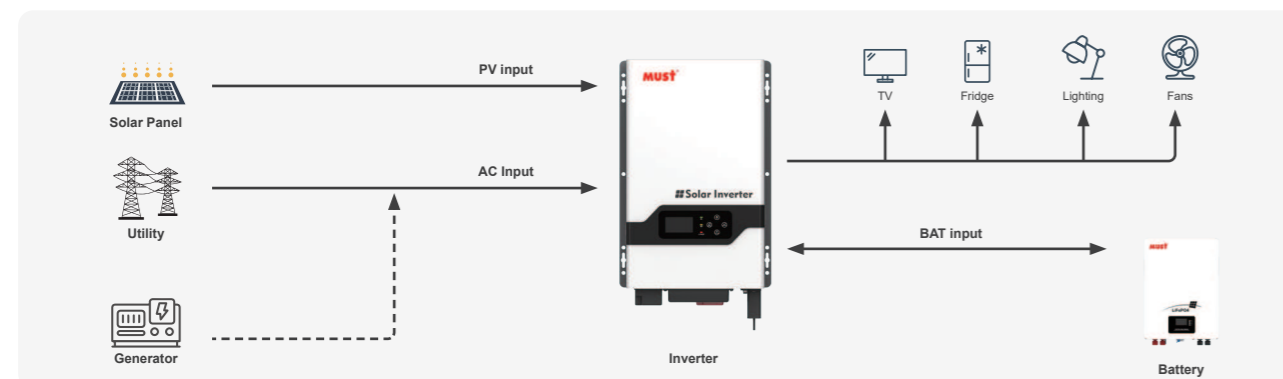

MODEL	PV30-1K VPM		PV30-1.5K VPM		PV30-2K VPM		PV30-3K VPM
Nominal Battery System Voltage	12VDC	24VDC	12VDC	24VDC	12VDC	24VDC	24VDC
INVERTER OUTPUT							
Rated Power	1000VA		1500VA		2000VA		3000VA
Surge Rating	3000VA		4500VA		6000VA		9000VA
Capable Of Starting Electric Motor	1HP		1HP		1HP		2HP
Waveform	Pure sine wave / same as input (bypass mode)						
Nominal Output Voltage RMS	110V /115V / 120V / 220V / 230V / 240VAC (±10% RMS)						
Output Frequency	50Hz / 60Hz ±0.3Hz						
Inverter Efficiency (Peak)	>88%						
Line Mode Efficiency	>95%						
Power Factor	0.7						
Typical Transfer Time	10ms(max)						
Overload	100% < Load < 110% (alarm 5min then stop output and fault code 07) 110% < Load < 125% (alarm 60s then stop output and fault code 07) Load > 125% (alarm 10s then stop output and fault code 07)						
AC INPUT							
Voltage	230VAC						
Selectable Voltage Range	75~135VAC; 155~265VAC (For personal computers)						
Frequency Range	50Hz / 60Hz(Auto sensing) 40~80Hz						
BATTERY							
Minimum Start Voltage	(10V/ 10.5V/ 11V/ 11.5V/ 12V)+0.5V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)						
Low Battery Voltage Alarm	(10V/ 10.5V/ 11V/ 11.5V/ 12V)+0.5V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)						
Low Battery Voltage Cut Off	10V/ 10.5V/ 11V/ 11.5V/ 12V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)						
High Battery Voltage Alarm	(12~14.5V)+1V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)						
High Battery Voltage Recover	(12~14.5V)+0.5V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)						
Energy Saving Mode	Load ≤50±20W(120V)/100±20W(220V)						
CHARGER							
Output Voltage	Depends on battery type						
Charge AC Input Breaker Rating	120V	1~2K/30A					3K/40A
	230V	1~3K/30A					
Overcharge Protection S.D.	15.7VDC for 12VDC mode (*2 for 24VDC mode)						
Maximum Charge Current	30A	20A	45A	25A	60A	30A	40A
BYPASS & PROTECTION							
Input Voltage Waveform	Sine wave (grid or generator)						
Nominal Input Frequency	50Hz or 60Hz						
Overload Protection (SMPS Load)	Circuit breaker						
Output Short Circuit Protection	Circuit breaker						
AC Input Breaker	1-3K/30A						
SOLAR CHARGER							
Maximum PV Array Power	1000W	2000W	1000W	2000W	1000W	2000W	2000W
Maximum PV Charge Current	60A						
DC Voltage	12V / 24V auto work						
MPPT Range @ Operating Voltage	12V: 16~75VDC; 24V: 32-100VDC						
Maximum PV Array Open Circuit Voltage	12V:75VDC; 24V:100VDC						
Standby Power Consumption	<2W						
MECHANICAL SPECIFICATIONS							
Mounting	Wall Mount						
Dimensions (W*H*D) (mm)	303*493*200						
Package Dimensions (W*H*D) (mm)	615*400*319						
N.W (kg)	/						
G.W (kg)	/						
OTHER							
Operating Temperature Range	0°C to 40°C						
Storage Temperature	-15°C to 60°C						
Audible Noise	60dB MAX						
Display	LED+LCD						
Standard Warranty	2 year						

*The technical specifications of this document are subject to change without any notice

LOW FREQUENCY SOLAR INVERTER PV3600 PRO Series

8~12KW | 245V | 100A, 200A


PV3600 PRO series is a multi-function inverter, combining functions of inverter and MPPT solar charge controller, solar charger and battery charger to offer uninterruptible power support. The comprehensive LCD display offers user-configurable and easy-accessible button operation such as battery charging current, AC/solar charger priority, and selectable input voltage based on different applications.




- Smart LCD setting(Working modes, Charge Current, Charge voltage, etc.)
- Built-in MPPT solar charge controller 100A/200A
- MPPT efficiency max 98%
- Powerful charge rate up to 140Amp
- Inside BMS function
- DC start & Automatic Self-Diagnostic Function
- WIFI / USB monitoring function (wi-fi optional)
- Supporting AGS, BTS port
- Compatible to generator



Back panel description

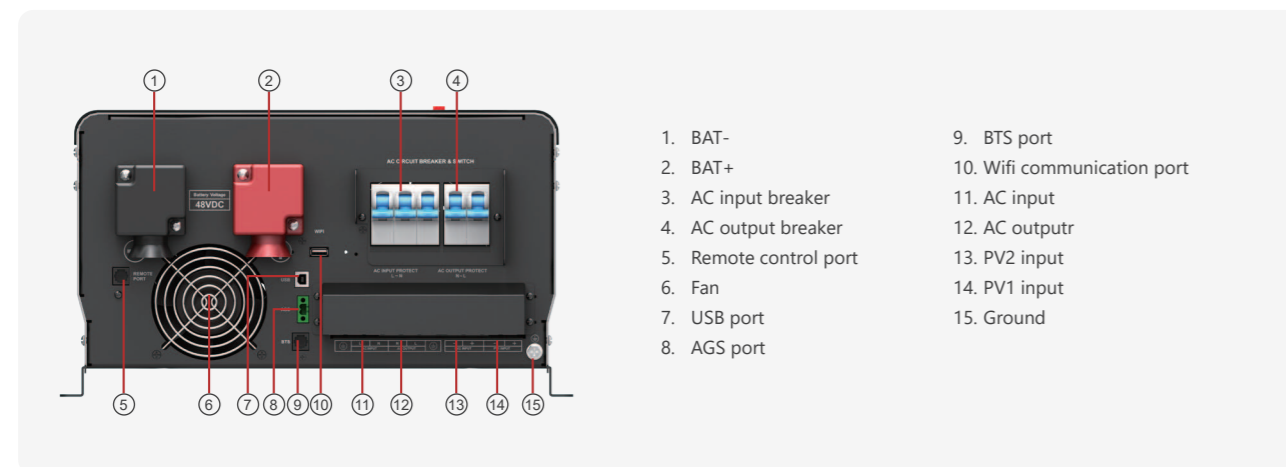

Solar system connection

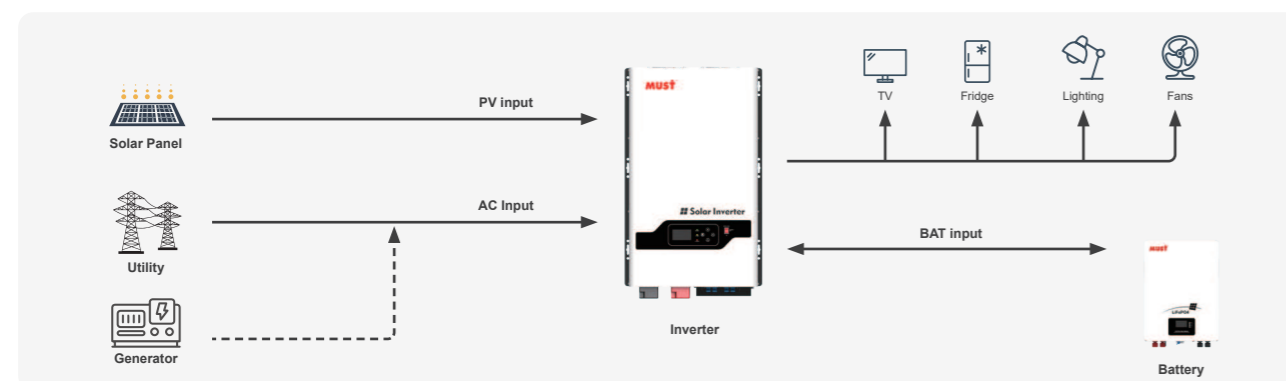

MODEL	PV36 PRO-8K	PV36 PRO-10K	PV36 PRO-12K
Nominal Battery System Voltage	48VDC	48VDC	48VDC
INVERTER OUTPUT			
Rated power	8.0KW	10.0KW	12.0KW
Surge rating	24000VA	30000VA	36000VA
Capable of starting electric motor	4HP	5HP	6HP
Waveform	Pure sine wave / same as input (bypass mode)		
Nominal output voltage RMS	220V / 230V / 240VAC (±10%RMS)		
Output frequency	50Hz / 60Hz ± 0.3Hz		
Inverter efficiency(peak)	>88%		
Line mode efficiency	>95%		
Power factor	1.0		
Typical transfer time	20ms(max)		
AC INPUT			
Voltage	230VAC		
Selectable voltage range	90-280 VAC (APL)		
Frequency range	50Hz / 60Hz		
BATTERY			
Low Battery Voltage Cut Off	40-48VDC for 48VDC mode		
Low Battery Voltage Recover	42-50VDC for 48VDC mode		
High Battery Voltage Alarm	60VDC for 48VDC mode		
High Battery Voltage Recover	57VDC for 48VDC mode		
Energy Saving Mode	<600W		
AC CHARGER			
Output voltage	Depends on battery type		
Charger AC input breaker rating	80A	100A	100A
Overcharge protection S.D.	62.8VDC for 48VDC mode		
Maximum charge current	100A	120A	140A
BTS			
Continuous output power	Yes Variances in charging voltage & S.D. voltage base on the battery temperature		
BYPASS & PROTECTION			
Input voltage waveform	Sine wave (grid or generator)		
Nominal input frequency	50Hz or 60Hz		
Overload protection (SMPS Load)	Circuit breaker		
Output short circuit protection	Circuit breaker		
Bypass breaker rating	80A	100A	100A
Max bypass current	36A	45A	54.5A
SOLAR CHARGER			
Maximum PV charge current	100A(200A optional)		
DC voltage	48V		
Maximim PV array power	5000W(10000W for 200A optional)		
MPPT range @ operating voltage(VDC)	64~235VDC		
Maximum PV array open circuit voltage	245VDC		
Maximum efficiency	>98%		
Standby power consumption	<2W		
MECHANICAL SPECIFICATIONS			
Mounting	Wall mount		
Dimensions (W*H*D)	402*674*222mm		
Package Dimensions (W*H*D)	/		
N.W (kg)	/		
G.W (kg)	/		
OTHER			
Operation temperature range	0°C to 50°C		
Storage temperature	-15°C to 60°C		
Audible noise	60dB MAX		
Display	LED+LCD		
Standard Warranty	2 year		
Loading (20GP/40GP/40HQ)	140pcs / 280pcs / 320pcs		
CERTIFICATION & STANDARDS			
CE-LVD (IEC62109-1:2010, EN IEC62109-2:2011)			

*The technical specifications of this document are subject to change without any notice

LOW FREQUENCY SOLAR INVERTER PV3900 Series

8-12KW | 250V | 100A/200A


PV3900 Series is a multi-function inverter, combining functions of inverter and MPPT solar charge controller, solar charger and battery charger to offer uninterruptible power support. The comprehensive LCD display offers user-configurable and easy-accessible button operation such as battery charging current, AC/solar charger priority, and selectable input voltage based on different applications.




- Smart LCD setting(Working modes, Charge Current, Charge voltage, etc.)
- Built-in MPPT solar charge controller 100A/200A
- MPPT efficiency max 98%
- Powerful charge rate up to 200A
- Inside BMS function
- DC start & Automatic Self-Diagnostic Function
- WIFI monitoring function (optional)
- Compatible to generator
- Parallel operation with up to 3 units




Back panel description

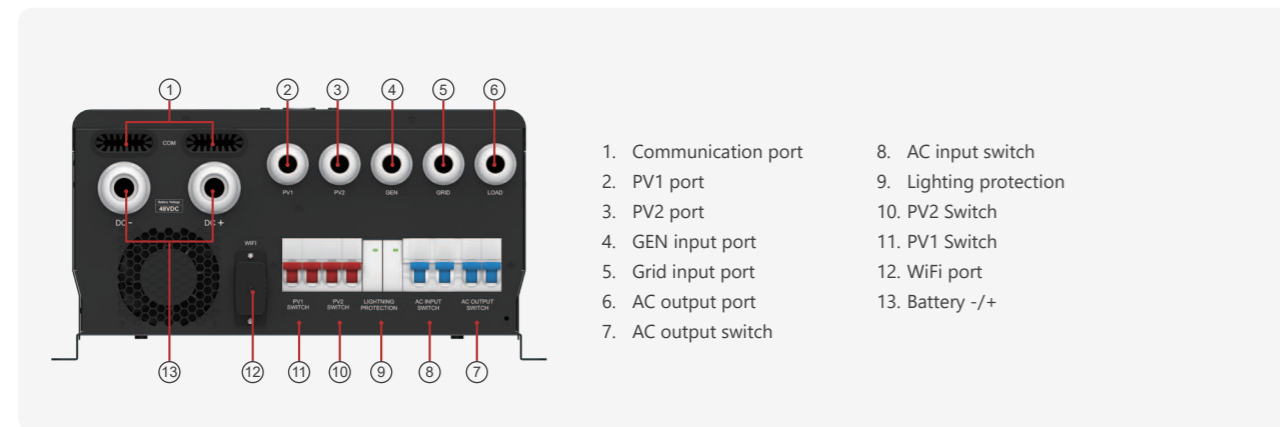

Parallel operation

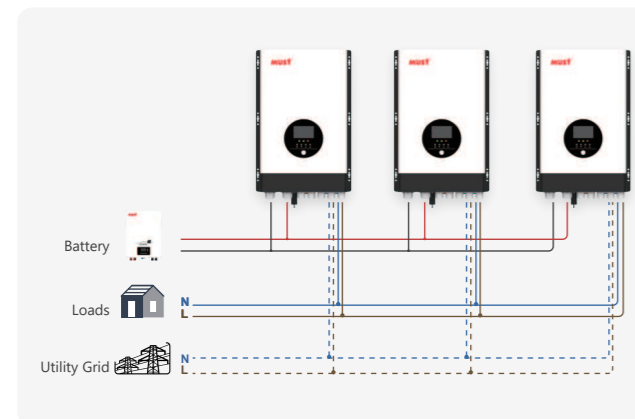

Solar system connection

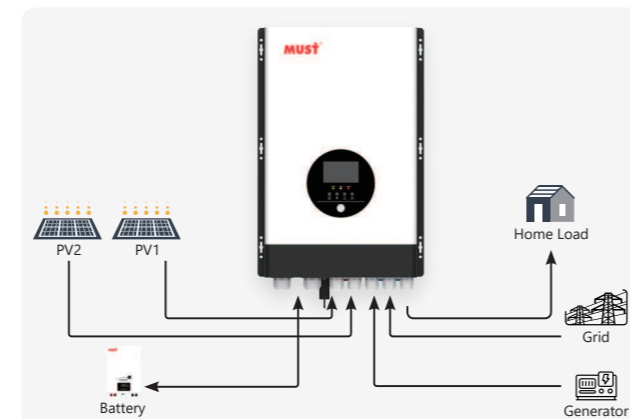

MODEL	PV3900-8048	PV3900-10048	PV3900-12048
Nominal Battery System Voltage	48VDC		
Stand-alone mode	Yes		
Parallel operation	3 units		
INVERTER OUTPUT			
Rated power	8KW	10KW	12KW
Surge rating	24000VA	30000VA	36000VA
Capable of starting electric motor	4HP	5HP	6HP
Waveform	Pure sine wave / same as input (bypass mode)		
Nominal output voltage RMS	220V/230V/240V		
Inverter efficiency (peak)	>88%		
Line mode efficiency	>95%		
Power factor	1.0		
Typical transfer time	10ms(max)		
AC INPUT			
Voltage	220V/230V/240V		
Selectable voltage range	90-280 VAC (APL)		
Frequency range	50Hz / 60Hz		
BATTERY			
Low battery voltage cutoff	40-48VDC for 48VDC mode		
Low battery voltage recover	42-50VDC for 48VDC mode		
High battery voltage cutoff	60VDC for 48VDC mode		
High battery voltage recover	57VDC for 48VDC mode		
AC CHARGER			
Output voltage	Depends on battery type (Supports lead-acid, gel, and lithium batteries)		
Charger AC input breaker rating	100A		
Overcharge protection S.D.	62.8VDC for 48VDC mode		
Maximum charge current	10-140A (setting) battery terminal		
BTS			
Continuous output power	Yes Variances in charging voltage & S.D. voltage base on the battery temperature		
BYPASS & PROTECTION			
Input voltage waveform	Sine wave (grid or generator)		
Nominal input frequency	50Hz or 60Hz		
Overload protection (SMPS Load)	Software + Circuit breaker		
Output short circuit protection	Software + Circuit breaker		
Bypass breaker rating	63A		
Max bypass current	80A		
SOLAR CHARGER			
Maximum PV charge current	100A	200A	200A
DC voltage	48V		
Maximum PV array power	5000W	10000W	10000W
MPPT range @ operating voltage(VDC)	64~235VDC		
Maximum PV array open circuit voltage	250VDC		
Maximum efficiency	>98%		
Standby power consumption	<2W		
MECHANICAL SPECIFICATIONS			
Mounting	Wall mount		
Packing	Wooden box		
Machine Dimension (W*H*D)(mm)	439*660.5*223		
Package Dimension (W*H*D)(mm)	782*304*520.5		
N.W(kg)	59	68	75
G.W(kg)	76	85	92
Warranty	2years		
OTHER			
Operating temperature range	0°C to 50°C		
Storage temperature	15°C to 60°C		
Audible noise	60dB MAX		
Communication	WiFi		
Display	LED+LCD		
CERTIFICATION & STANDARDS			
CE-LVD (IEC62109-1:2010, EN IEC62109-2:2011)			

*The technical specifications of this document are subject to change without any notice

PURE SINE WAVE SOLAR INVERTER PV5000 Series


3~5KW | 145V | 80A MPPT

This is a multi-function inverter/charger, combining functions of inverter, solar charger and battery charger to offer uninterruptible power support with portable size. Its comprehensive LCD display offers user-configurable and easy-accessible button operation such as battery charging current, AC/solar charger priority, and acceptable input voltage based on different applications.



- Pure sine wave inverter
- Configurable input voltage range for home appliances and personal computers via LCD setting
- Configurable battery charging current based on applications via LCD setting
- Configurable AC/Solar Charger priority via LCD setting
- Compatible to mains voltage or generator power
- Auto restart while AC is recovering
- Overload/ Over temperature/ short circuit protection
- Smart battery charger design for optimized battery performance
- Cold start function
- Built-in MPPT solar charge controller 80A
- WIFI remote monitoring (optional)

Back panel description

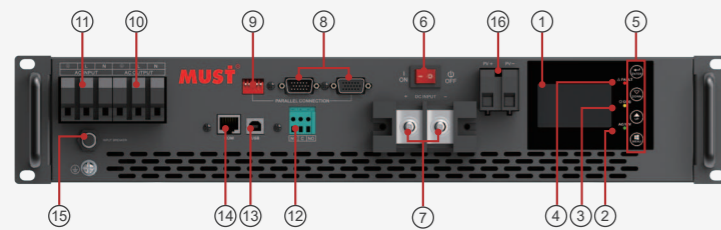

- | | | |
|-----------------------|---|------------------------------|
| 1. LCD display | 6. Power on/off switch | 11. AC input |
| 2. Status indicator | 7. Battery input | 12. Dry contact |
| 3. Charging indicator | 8. Parallel communication port (only for parallel mode) | 13. USB |
| 4. Fault indicator | 9. Parallel switch | 14. RS485 communication port |
| 5. Function buttons | 10. AC output | 15. Circuit breaker |
| | | 16. PV Input |

Solar system connection



MODEL	PV50-3K	PV50-4K	PV50-5K
Nominal Battery System Voltage	48V		
INVERTER OUTPUT			
Rated Output Power	3KW	4KW	5KW
Surge Power	6KW	8KW	10KW
Waveform	Pure Sine Wave		
Power factor	1		
Output Voltage Regulation	230Vac±5%		
Inverter Efficiency(Peak)	90%		
Transfer Time	10ms typical (UPS / VDE4105) 20ms typical (APL)		
AC INPUT			
Nominal Input Voltage	230VAC		
Selectable voltage range	170~280VAC(UPS), 90~280VAC(APL) , 184~253VAC(VDE4105)		
Input Voltage Waveform	Sinusoidal (utility or generator)		
Frequency Range	50Hz / 60Hz		
SOLAR CHARGER & AC CHARGER			
Maximum PV Array Open Circuit Voltage	145VDC		
MPPT Range @ Operating Voltage	60~130VDC		
Standby Power Consumption	2W		
Maximum PV Array Power	4000W		
Maximum PV Charge Current:	80A		
Maximum Efficiency	98%		
Maximum AC Charge Current	60A		
Maximum Charge Current(PC+AC)	80A		
MECHANICAL SPECIFICATIONS			
Machine Dimension (W*H*D)(mm)	468*86.3*400		
Package Dimension (W*H*D)(mm)	/		
N.W (kg)	10		
G.W (kg)	/		
OTHER			
Parallel operation	3 units		
Operating Temperature Range	-10°C ~ 40°C		
Storage temperature	-15°C~ 60°C		
CERTIFICATION & STANDARDS			
CE, EN IEC62368-1			

*The technical specifications of this document are subject to change without any notice

PURE SINE WAVE SOLAR INVERTER PV5000 PRO Series


3~5.2KW | 450V | 100A MPPT

PV5000 PRO is a multi-function inverter/charger, combining functions of inverter, MPPT solar charger and battery charger to offer uninterruptible power support in portable size. PV5000 PRO Series can run without battery. The Maximum PV array open circuit voltage can reach 450V and MPPT voltage is 150~430Vdc, which Can help customers make full use of solar energy.



- Pure sine wave inverter
- Configurable input voltage range for home appliances and personal computers via LCD setting
- Configurable battery charging current based on applications via LCD setting
- Configurable AC/Solar Charger priority via LCD setting
- Compatible to mains voltage or generator power
- Auto restart while AC is recovering
- Overload/ Over temperature/ short circuit protection
- Smart battery charger design for optimized battery performance
- Cold start function
- Parallel operation with up to 3 units
- WIFI remote monitoring (optional)

Back panel description

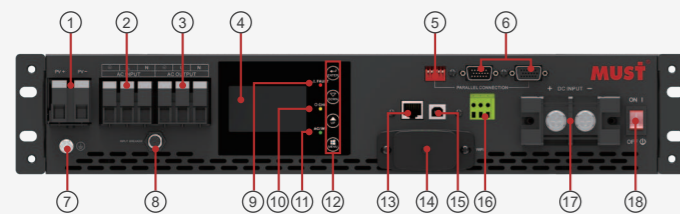

- | | | |
|---|------------------------|------------------------------|
| 1. PV Input | 7. Ground | 13. RS485 communication port |
| 2. AC input | 8. Input breaker | 14. WiFi port |
| 3. AC output | 9. Fault indicator | 15. USB port |
| 4. LCD display | 10. Charging indicator | 16. Dry contact |
| 5. Parallel switch | 11. Status indicator | 17. Battery input |
| 6. Parallel communication port (only for parallel mode) | 12. Function buttons | 18. Power on/off switch |

Solar system connection



MODEL	PV50-3048 PRO	PV50-4048 PRO	PV50-5248 PRO
Nominal Battery System Voltage	48VDC		
INVERTER OUTPUT			
Rated Power	3000VA / 3000W	5200VA / 5200W	5200VA / 5200W
Surge Power	6000W	8000W	10400W
Waveform	Pure sine wave		
AC Voltage Regulation (Batt.Mode)	230VAC±5%(Setting)		
Inverter Efficiency(Peak)	90%		
Transfer Time	10ms (UPS / VDE4105) / 20ms (APL)		
AC INPUT			
Voltage	230VAC±5%		
Selectable Voltage Range	170~280VAC(UPS) / 90~280VAC(APL) / 184~253VAC(VED4105)		
Frequency Range	50Hz / 60Hz(Auto sensing)		
BATTERY			
Normal voltage	48VDC		
Floating Charge Voltage	54.8VDC		
Overcharge Protection	60VDC		
SOLAR CHARGER & AC CHARGER			
Maximum PV Array Open Circuit Voltage	450VDC		
Maximum PV input voltage	18A	18A	27A
Charging Algorithm	3-Step (Flooded Battery, AGM / GEL / LEAD Battery), 4-Step (Li)		
Maximum PV Array Power	4000W	5000W	6000W
PV Array MPPT Voltage Range	150~430 VDC		
Maximum Solar Charge Current	80A	80A	100A
Maximum AC Charge Current	60A	60A	80A
Maximum Charge Current	80A	80A	100A
MECHANICAL SPECIFICATIONS			
Machine Dimension (W*H*D)(mm)	468*86.3*400		
Package Dimension (W*H*D)(mm)	546*185*540		
N.W(kg)	12.5		
G.W(kg)	14		
Warranty	2years		
OTHER			
Parallel operation	3 units		
Humidity	5% to 95% Relative humidity (Non-condensing)		
Operating Temperature	0°C~50°C		
Storage Temperature	-25°C~60°C		
CERTIFICATION & STANDARDS			
CE/IEC			

*The technical specifications of this document are subject to change without any notice

HIGH FREQUENCY POWER INVERTER/CHARGER EP1100 Pro Series


1.2~2.4KVA | 12V/24V

EP1100 Pro 1200VA/2400VA is a modified sine wave inverter applied to TV, stereos, laptops, and desktop computers and other home appliances. It will automatically switch to inverter and provide power when AC is interrupted unexpectedly. It's perfect for the user who need a simple and economical inverter, with user-friendly installation and setting.




- Rated power 1.2KVA to 2.4KVA
- Modified sine wave inverter
- Double layers PCB board.
- Configurable input voltage ranges (90-280VAC/170-280VAC) via LCD setting
- Display accumulated working time
- 3 steps charging algorithm
- Auto restart while AC recovery
- Overload & short-circuit protection, Battery reverse polarity protection, Deep discharge protection
- Advanced technology optimizes battery life
- Automatic line-to-battery switchover

Back panel description

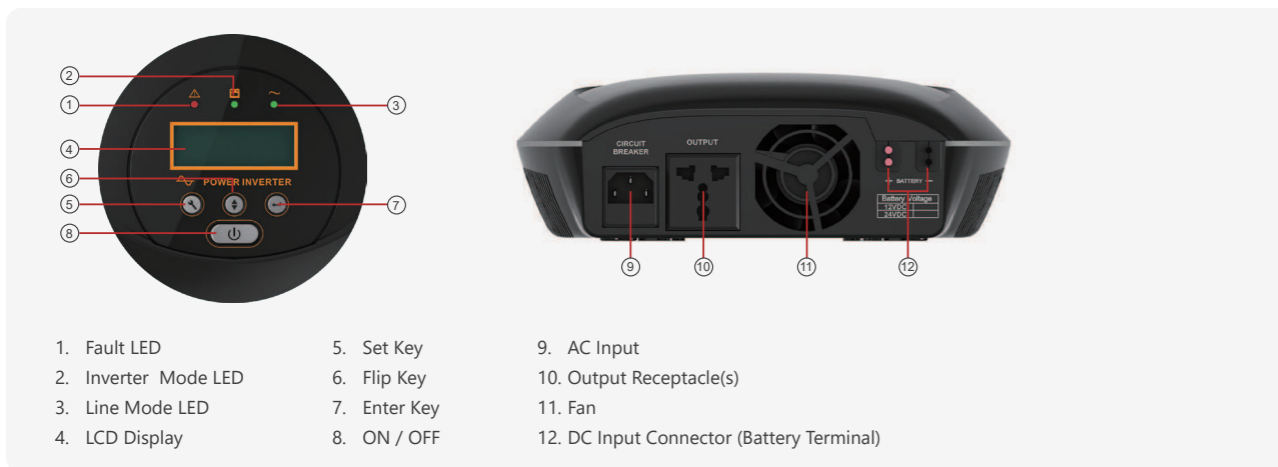

Solar system connection

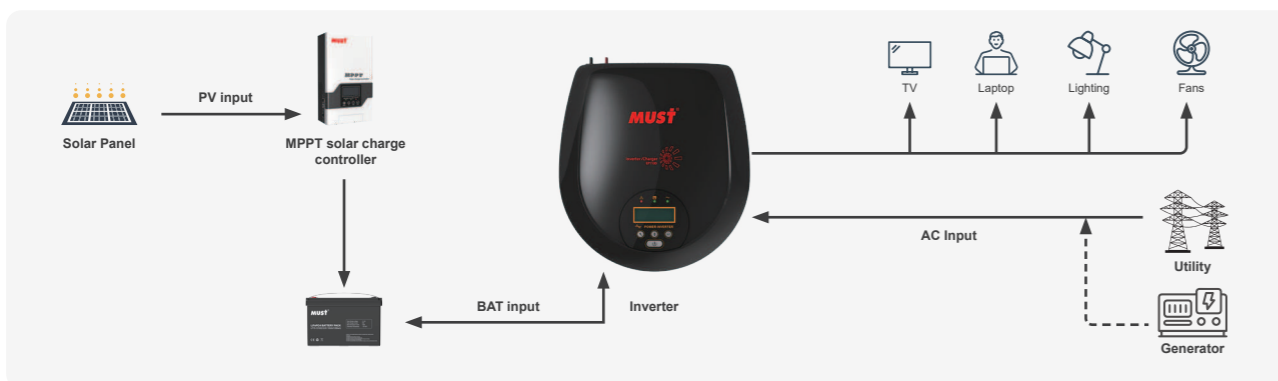

MODEL	EP11-1200 PRO	EP11-2400 PRO
Nominal Battery System Voltage	12VDC	24VDC
INVERTER OUTPUT		
Rated Power	1200VA / 720W	2400VA / 1440W
Waveform	Modified Sine Wave	
Nominal Output Voltage RMS	230V	
Output Voltage Regulation	+10/-18%	
Output Frequency	50Hz / 60Hz±0.5Hz	
Inverter Efficiency (Peak)	>80%	
Line Mode Efficiency	>95%	
Power Factor	0.6	
Typical Transfer Time	Typical 15~20ms; 40ms max	
AC INPUT		
Voltage	220 / 230 / 240VAC	
Selectable Voltage Range	Narrow	170~280VAC
	Wide	90~280VAC
Frequency Range	50Hz / 60Hz(Auto sensing)	
BATTERY		
Nominal Input Voltage	12VDC	24VDC
Minimum Start Voltage	10.5VDC	21.0VDC
Low Battery Alarm	10.5VDC±0.2V	21.0VDC±0.4V
Low Battery Cutoff	10.0VDC±0.2V	20.0VDC±0.4V
High Voltage Alarm	16.0VDC±0.2V	32.0VDC±0.4V
High Battery Voltage Recover	15.0VDC±0.2V	30.0VDC±0.4V
CHARGER		
Boost Voltage (Vbat<12.5V)	14.4VDC±0.2V	28.8VDC±0.4V
Float Voltage (Vbat>12.5V)	13.7VDC±0.2V	27.4VDC±0.4V
Charging Current 10A	10A±2A	
Charging Current 20A	20A±2A	
Overcharge Protection S.D.	15.5VDC±0.4A	31VDC±0.8A
BYPASS & PROTECTION		
Nominal Input Frequency	50Hz or 60Hz	
Overload Protection (SMPS Load)	FUSE	
Output Short Circuit Protection	10A	
Bypass Fuse Rating	10A	
Max Bypass Current	10A	
MECHANICAL SPECIFICATIONS		
Machine Dimension (W*H*D)(mm)	246*253*87	
Package Dimension (W*H*D)(mm)	394*347*715 (6pcs)	
N.W(kg)	≈2.675	≈2.775
G.W(kg)	≈3.175	≈3.275
OTHER		
Operating Temperature Range	0°C to 40°C	
Audible Noise	60dB MAX	
Display	LED+LCD	
Standard Warranty	2 year	
CERTIFICATION & STANDARDS		
IEC60950-1+A1+A2		

*The technical specifications of this document are subject to change without any notice

HIGH FREQUENCY POWER INVERTER/CHARGER EP1500 Series


1~2KVA | 12V/24V | 230V

EP1500 series is a pure sine wave inverter applied to TV, stereos, laptops, and desktop computers and other home appliances. It will automatically switch to inverter and provide power when AC is interrupted unexpectedly. It's perfect for the user who need a simple and economical inverter, with user-friendly installation and setting.




- Pure sine wave inverter
- Low shutdown loss for energy storage system application
- Support two kinds of batteries: Lithium Battery Pack and Lead-acid Battery
- Support fast max charging current setting
- Different charging mode for different kinds of batteries
- Auto restart while AC recovery
- Overload & short-circuit protection, Battery reverse polarity protection, Deep discharge protection
- Advanced technology optimizes battery life
- Automatic line-to-battery switch over
- Automatic activate lithium battery pack which is be over discharged no output when AC input is OK

Back panel description

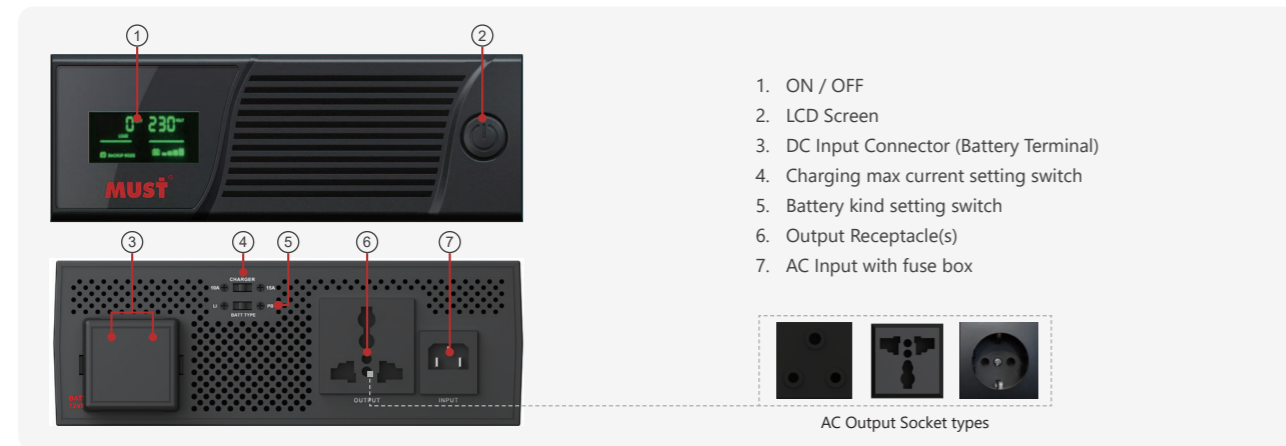

Solar system connection

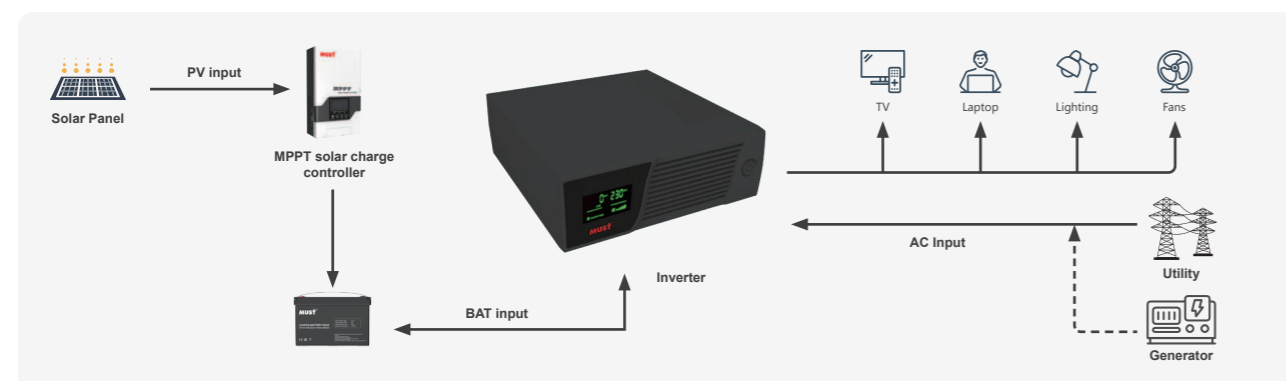

MODEL	EP15-1012	EP15-1512	EP15-2024
Nominal Battery System Voltage	12VDC	12VDC	24VDC
INVERTER OUTPUT			
Rated Power	1000VA / 600W	1500VA / 1000W	2000VA / 1200W
Waveform	Pure Sine Wave		
Nominal Output Voltage RMS	230V		
Output Voltage Regulation	+10/-18%		
Output Frequency	50Hz / 60Hz ±1Hz		
Inverter Efficiency (Peak)	>90%		
Line Mode Efficiency	>95%		
Typical Transfer Time	<10ms typical, 20ms max		
AC INPUT			
Voltage	230VAC		
Voltage Range	176~278VAC ± 3%		
Frequency Range	45~65Hz ± 2Hz		
BATTERY			
Note: Below Parameters (PB) Lead-acid Battery / (LI) LiFePO4 Lithium Battery Pack - 12V(4 Series) 24V(8 Series)			
Nominal Input voltage	12VDC	12VDC	24VDC
Low Battery Voltage Cut Off	10.5VDC(PB) / 11.5VDC(LI)	10.5VDC(PB) / 11.5VDC(LI)	21.0VDC(PB) / 23.0VDC(LI)
Low Battery Voltage Alarm	11.0VDC(PB) / 12.0VDC(LI)	11.0VDC(PB) / 12.0VDC(LI)	22.0VDC(PB) / 24.0VDC(LI)
Low Battery Voltage Recovery	12.5VDC(PB) / 12.8VDC(LI)	12.5VDC(PB) / 12.8VDC(LI)	25.0VDC(PB) / 25.6VDC(LI)
High Battery Voltage Alarm	14.5VDC(PB) / 14.5VDC(LI)	14.5VDC(PB) / 14.5VDC(LI)	29.0VDC(PB) / 29.0VDC(LI)
High Battery Voltage Recovery	15.0VDC(PB) / 14.8VDC(LI)	15.0VDC(PB) / 15.0VDC(LI)	30.0VDC(PB) / 29.6VDC(LI)
CHARGER			
Boost Voltage	14.4VDC(PB) / 14.4VDC(LI)	14.4VDC(PB) / 14.4VDC(LI)	28.8VDC(PB) / 28.8VDC(LI)
Float Voltage	13.8VDC(PB) / 14.4VDC(LI)	13.8VDC(PB) / 14.4VDC(LI)	27.6VDC(PB) / 28.8VDC(LI)
Charging Current	10A±2A @ 12V	10A±2A @ 12V	7A±2A @ 24V
Charging Current	20A±2A @ 12V	20A±2A @ 12V	15A±2A @ 24V
Overcharge Protection S.D.	15.5VDC	15.5VDC	31VDC
BYPASS & PROTECTION			
Nominal Input Frequency	50Hz / 60Hz (Auto sensing)		
Overload Protection (SMPS Load)	FUUSE		
Output Short Circuit Protection	6.3A	10A	10A
Bypass Fuse Rating	6.3A	10A	10A
Max Bypass Current	6.3A	10A	10A
MECHANICAL SPECIFICATIONS			
Machine Dimension (W*H*D)(mm)	255*80*224		
Package Dimension (W*H*D)(mm)	332*127*288(1pcs); 400*596*347(6pcs)		
N.W(kg)	2.3		
G.W(kg)	16(6pcs)		
Material	Plastic case		
OTHER			
Operation Temperature Range	0°C ~ 40°C		
Audible Noise	60dB MAX		
Display	LED+LCD		
Standard Warranty	2 year		
CERTIFICATION & STANDARDS			
EN IEC62368-1+A11			

*The technical specifications of this document are subject to change without any notice

HIGH FREQUENCY POWER INVERTER/CHARGER EP1500 PLUS Series


0.6~1.2KVA | 12V/24V | 230V

EP1500 PLUS series is a pure sine wave inverter applied to TV, stereos, laptops, and desktop computers and other home appliances. It will automatically switch to inverter and provide power when AC is interrupted unexpectedly. It's perfect for the user who need a simple and economical inverter, with user-friendly installation and setting.




- Pure sine wave inverter
- Low shutdown loss for energy storage system application
- Support two kinds of batteries: Lithium Battery Pack and Lead-acid Battery
- Support fast max charging current setting
- Different charging mode for different kinds of batteries
- Auto restart while AC recovery
- Overload & short-circuit protection, Battery reverse polarity protection, Deep discharge protection
- Advanced technology optimizes battery life
- Automatic line-to-battery switch over
- Automatic activate lithium battery pack which is be over discharged no output when AC input is OK

Back panel description

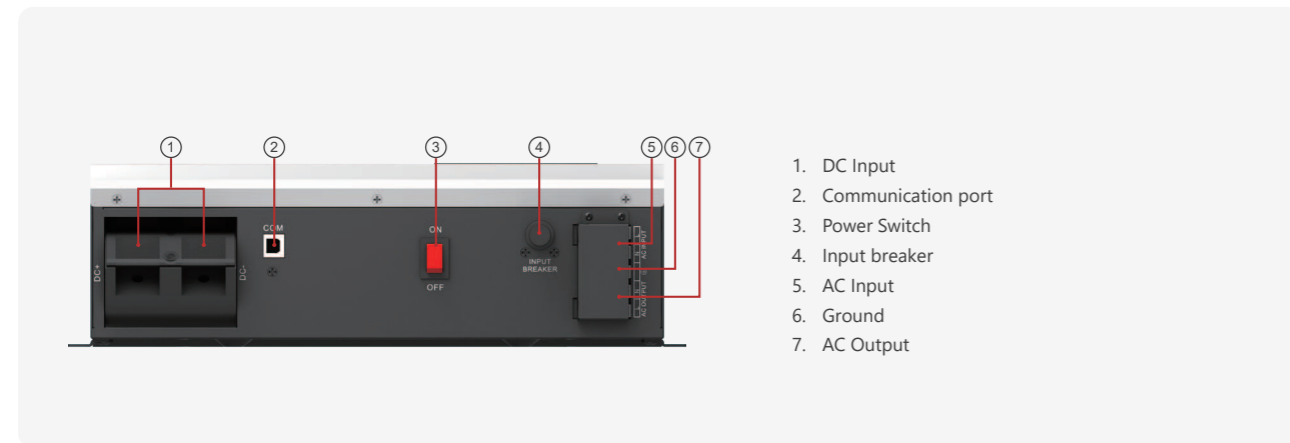

Solar system connection

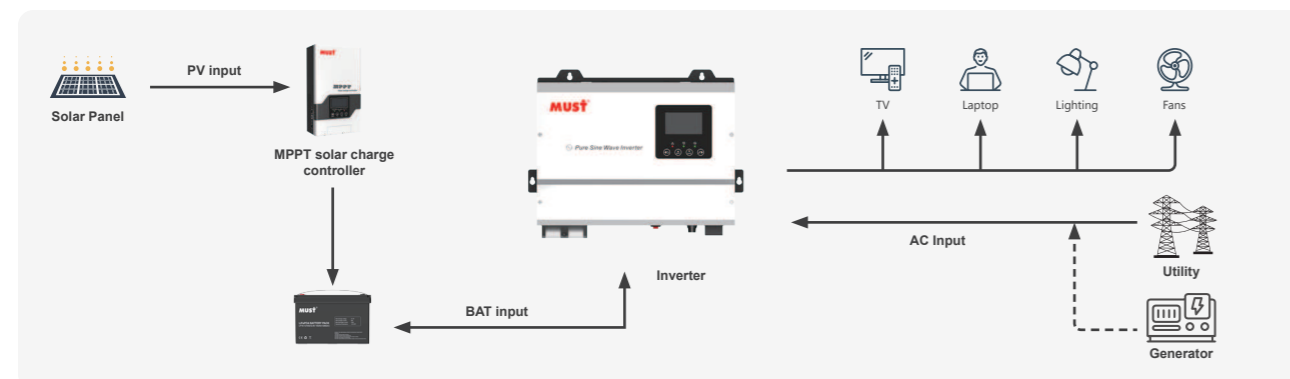

MODEL	EP15-0612 PLUS	EP15-1012 PLUS	EP15-1224 PLUS
Nominal Battery System Voltage	12VDC	12VDC	24VDC
INVERTER OUTPUT			
Rated Power	600VA / 600W	1000VA / 1000W	1200VA / 1200W
Waveform	Pure Sine Wave		
Nominal Output Voltage RMS	230V		
Output Voltage Regulation	+10/-18%		
Output Frequency	50Hz / 60Hz ± 1Hz		
Inverter Efficiency (Peak)	>90%		
Line Mode Efficiency	>95%		
Typical Transfer Time	<10ms typical, 20ms max		
AC INPUT			
Voltage	230VAC		
Voltage Range	90~280VAC ± 3%		
Frequency Range	45~65Hz ± 2Hz		

BATTERY						
Note: Below Parameters (PB) Lead-acid Battery / (LI) LiFePO4 Lithium Battery Pack - 12V(4 Series) 24V(8 Series)						
Nominal Input voltage	12VDC		12VDC		24VDC	
Low Battery Voltage Cut Off	10.5VDC(PB)	11.5VDC(LI)	10.5VDC(PB)	11.5VDC(LI)	21.0VDC(PB)	23.0VDC(LI)
Low Battery Voltage Alarm	11.0VDC(PB)	12.0VDC(LI)	11.0VDC(PB)	12.0VDC(LI)	22.0VDC(PB)	24.0VDC(LI)
Low Battery Voltage Recovery	12.5VDC(PB)	12.8VDC(LI)	12.5VDC(PB)	12.8VDC(LI)	25.0VDC(PB)	25.6VDC(LI)
High Battery Voltage Recovery	14.5VDC(PB)	14.5VDC(LI)	14.5VDC(PB)	14.5VDC(LI)	29.0VDC(PB)	29.0VDC(LI)
High Battery Voltage Cut Off	15.0VDC(PB)	15.0VDC(LI)	15.0VDC(PB)	15.0VDC(LI)	30.0VDC(PB)	30.0VDC(LI)

CHARGER						
Boost Voltage	14.4VDC(PB)	14.4VDC(LI)	14.4VDC(PB)	14.4VDC(LI)	28.8VDC(PB)	28.8VDC(LI)
Float Voltage	13.8VDC(PB)	14.4VDC(LI)	13.8VDC(PB)	14.4VDC(LI)	27.6VDC(PB)	28.8VDC(LI)
Charging Current	20A±2A @ 12V		20A±2A @ 12V		15A±2A @ 24V	
BYPASS & PROTECTION						
Nominal Input Frequency	50Hz / 60Hz (Auto sensing)					
Overload Protection (SMPS Load)	FUSE					
Output Short Circuit Protection	6.3A		10A		10A	
Bypass Fuse Rating	6.3A		10A		10A	
Max Bypass Current	6.3A		10A		10A	

MECHANICAL SPECIFICATIONS			
Machine Dimension (W*H*D)(mm)	300*253*95		
Package Dimension (W*H*D)(mm)	355*147*290		
N.W(kg)	3.4	3.7	
G.W(kg)	3.7	4.0	
Material	Metal case	Metal case	Metal case

OTHER	
Operating Temperature Range	0°C ~ 45°C
Audible Noise	60dB MAX
Display	LED+LCD
Standard Warranty	2 year

CERTIFICATION & STANDARDS	
EN IEC62368-1+A11	

*The technical specifications of this document are subject to change without any notice

HIGH FREQUENCY POWER INVERTER/CHARGER EP1800 Series

1~5KW | 12V/24V/48V | 230V



This is a multi-function inverter/charger, combining functions of inverter, battery charger to offer uninterruptible power support with portable size. Its comprehensive LCD display offers user-configurable and easy-accessible button operation such as battery charging current, AC charger priority, and acceptable input voltage based on different applications.




- Pure sine wave inverter
- Configurable input voltage range for home appliances and personal computers via LCD setting
- Configurable battery charging current based on applications via LCD setting
- Configurable AC Charger via LCD setting
- Compatible to mains voltage or generator power
- Auto restart while AC is recovering
- Overload/ Over temperature/ short circuit protection
- Smart battery charger design for optimized battery performance
- Cold start function
- With BMS lithium battery communication function (CAN port)

Back panel description



- | | | |
|-----------------------------|------------------------|--|
| 1. Circuit breaker | 5. USB port | 9. Parallel communication port (only for parallel model) |
| 2. AC input | 6. Dry contact | 10. Parallel switch |
| 3. AC output | 7. Power on/off switch | 11. WiFi port (optional) |
| 4. RS485 communication port | 8. Battery input | |

Solar system connection

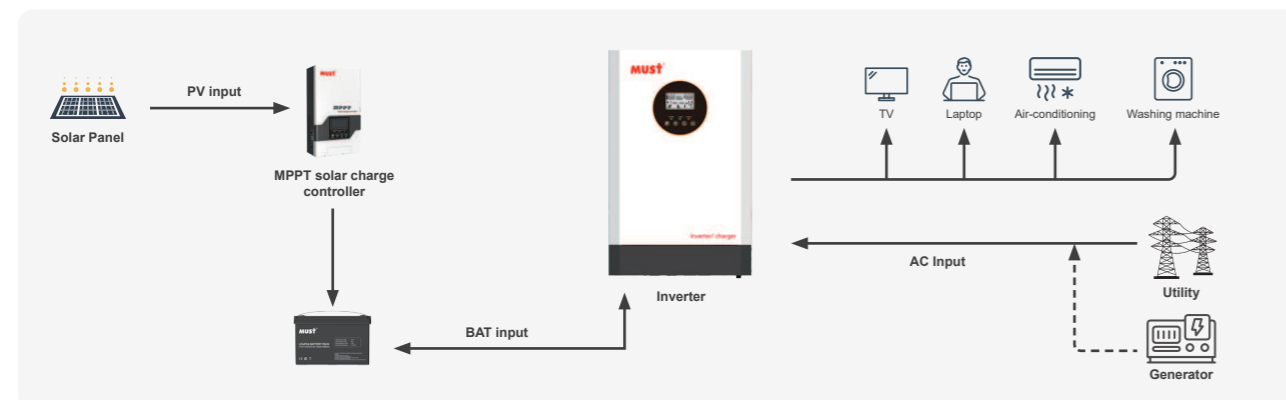

MODEL	EP18-1012	EP18-2024	EP18-3024	EP18-4048	EP18-5048
Nominal Battery System Voltage	12VDC	24VDC		48VDC	
INVERTER OUTPUT					
Rated Power	1000W	2000W	3000W	4000W	5000W
Surge Power	2000W	4000W	6000W	8000W	10000W
Waveform	Pure sine wave				
Output Voltage Regulation	230Vac±5%				
Output Frequency	60Hz or 50Hz				
Inverter Efficiency (Peak)	90%				
Transfer Time	10ms typical (UPS,VDE); 20ms typical (APL)				
AC INPUT					
Nominal Input Voltage	230VAC				
Selectable Voltage Range	170~280VAC(UPS), 90~280VAC(APL), 184~253VAX(VDE)				
Frequency Range	50Hz/60Hz (Auto sensing)				
BATTERY					
Nominal voltage	12VDC	24VDC		48VDC	
Floating Charge Voltage	13.7VDC	27.4VDC		54.8VDC	
Overcharge Protection	15VDC	30VDC		60VDC	
CHARGER					
Charging Current @ Nominal Input Voltage	10/20A	20/30A	20/30A		1~60A
Charging Algorithm	3-Step(Flooded Battery, AGM/Gel/LEAD Battery),4-Step(LI)				
Max Charging Current	20A	30A	30A		60A
Default Charging Current	10A	20A	20A		30A
PROTECTION					
Nominal Input Frequency	50Hz / 60Hz (Auto detection)				
Output Short Circuit Protection	Line mode: Circuit Breaker; Battery mode: Electronic Circuits				
MECHANICAL SPECIFICATIONS					
Machine Dimension (W*H*D)(mm)	240*316*95	272*355*100		297.5*468*125	
Package Dimension (W*H*D)(mm)	/				
N.W(kg)	/				
G.W(kg)	/				
OTHER					
Operation Temperature Range	-10°C ~ 50°C				
Storage temperature	-15°C~ 60°C				
Audible Noise	60dB MAX				
Display	LED+LCD				
Standard Warranty	2 year				
CERTIFICATION & STANDARDS					
CE-EMC+LVD (EN6100-6-4, EN6100-6-2+EN IEC62109-1					

*The technical specifications of this document are subject to change without any notice

HIGH FREQUENCY POWER INVERTER/CHARGER EP1800 PRO Series

5.2KW | 48V | 230V



This is a multi-function inverter/charger, combining functions of inverter, battery charger to offer uninterruptible power support with portable size. Its comprehensive LCD display offers user-configurable and easy-accessible button operation such as battery charging current, AC charger priority, and acceptable input voltage based on different applications.




- Pure sine wave inverter
- Configurable input voltage range for home appliances and personal computers via LCD setting
- Configurable battery charging current based on applications via LCD setting
- Configurable AC Charger via LCD setting
- Compatible to mains voltage or generator power
- Auto restart while AC is recovering
- Overload/ Over temperature/ short circuit protection
- Smart battery charger design for optimized battery performance
- Acid or Lithium select
- Parallel operation with up to 3 units
- WIFI remote monitoring (optional)
- With BMS lithium battery communication function (CAN port)

Back panel description



- | | | |
|-----------------------------|------------------------|--|
| 1. Circuit breaker | 5. USB port | 9. Parallel communication port (only for parallel model) |
| 2. AC input | 6. Dry contact | 10. Parallel switch |
| 3. AC output | 7. Power on/off switch | 11. WiFi port (optional) |
| 4. RS485 communication port | 8. Battery input | |

Solar system connection

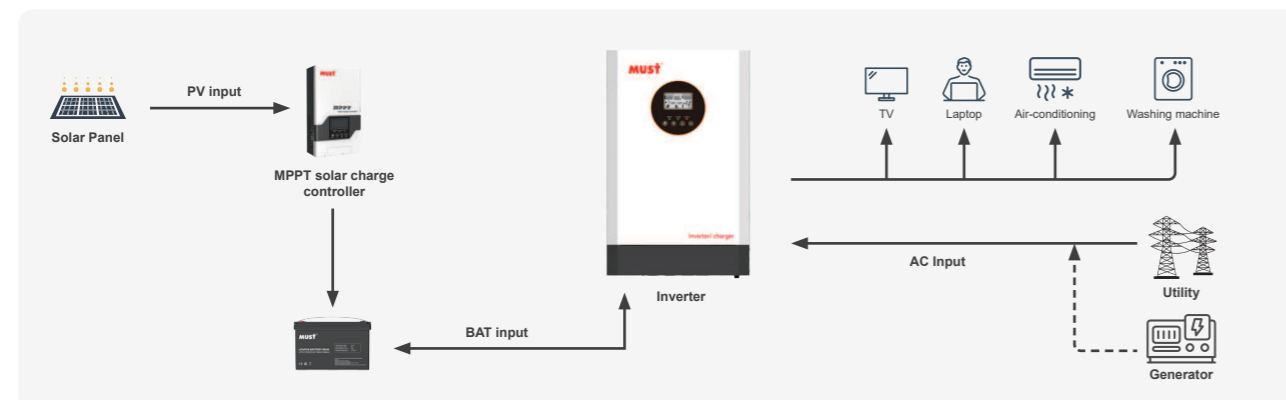

MODEL	EP18-5248 PRO	
Rated output power	5200VA/5200W	
Surge Power	10400W	
AC INPUT		
Nominal Input Voltage	230Vac±5%	
Selectable Voltage range	170~280VAC(UPS) / 90~280VAC(APL) / 184~253VAC(VDE)	
Frequency Range	50Hz/60Hz (Auto sensing)	
Inverter Efficiency(Peak)	90%	
INVERTER OUTPUT		
Output voltage waveform	Pure sine wave	
Output Voltage Regulation	230Vac ± 5%	
Output Frequency	50Hz / 60Hz(Auto sensing)	
Power Factor	≈ 1	
Transfer Time	10ms (UPS / VDE4105) / 20ms (APL) <50ms(For parallel operation)	
Nominal DC Input Voltage	48VDC	
Cold Start Voltage	46VDC	
Output Short Circuit Protection	Line mode	Circuit Breaker
	Battery mode	Electronic Circuits
BATTERY		
Battery voltage	48VDC	
Floating voltage	54.8V	
Overcharge Protection	60V	
CHARGER		
Charging Current(UPS) @Nominal Input Voltage	Default:30A; MAX:80A	
Bulk Charging Voltage	56.4Vdc	
Floating Charging Voltage	54Vdc	
Charging Algorithm	3-Step	
GENERAL		
Mounting	Wall mount	
Display	LED+LCD	
Parallel operation	3 units	
Operating Temperature Range	-10°C to 50°C	
Storage Temperature	-15°C to 60°C	
Standard Warranty	2 year	
MECHANICAL SPECIFICATIONS		
Machine Dimension (W*H*D)(mm)	297.5*468*125	
Package Dimension (W*H*D)(mm)	/	
N.W(kg)	/	
G.W(kg)	/	
CERTIFICATION & STANDARDS		
CE		

*The technical specifications of this document are subject to change without any notice

POWER INVERTER/CHARGER EP2100 PRO Series

300W~1000W | 12V/24V | 10~30A




EP2100 PRO series inverter is a cost effective, intelligent with UPS function. The comprehensive LCD offers user-configurable and easy-accessible button adjustment such as battery charge current, battery charge voltage, frequency, buzzer etc. It's perfect for the user who need a simple and economical inverter, with user-friendly installation and setting. Tower and rack design available for different choices.




- Rated power 300W to 1000W
- Pure sine wave output
- Smart LCD setting (frequency , charge voltage, charge current, etc).
- 3 steps charging algorithm
- Built in AVR function
- Overload and short-circuit protection
- Battery reverse polarity protection (Optional)
- Deep discharge protection
- Cold start function

Back panel description

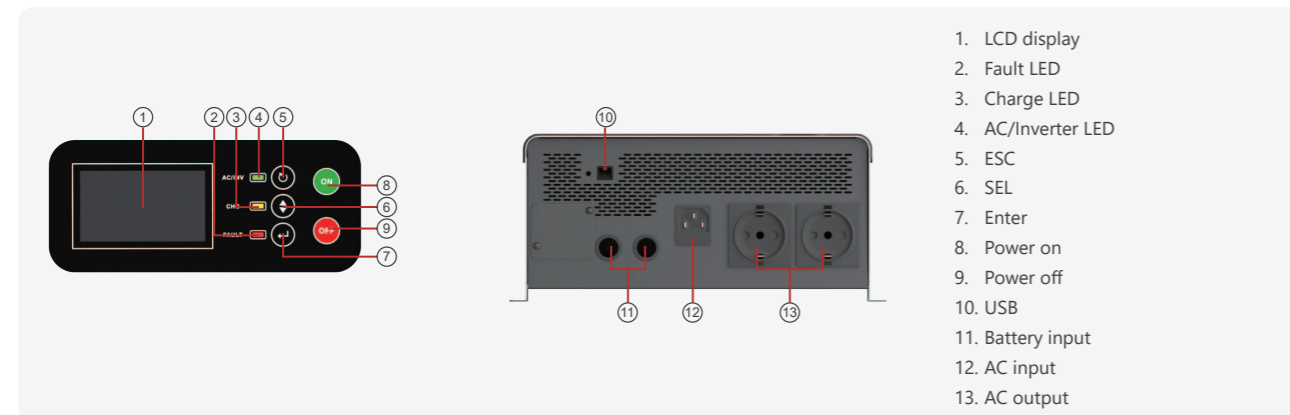

Solar system connection

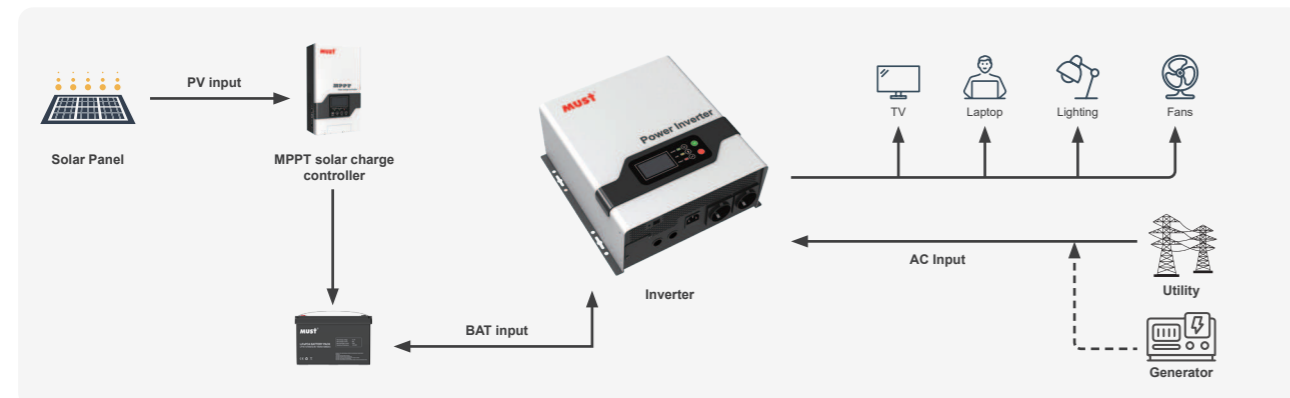

MODEL	EP21-0312 PRO	EP21-0412 PRO	EP21-0512 PRO	EP21-0612 PRO	EP21-0812 PRO	EP21-1012 PRO	EP21-0624 PRO	EP21-0824 PRO	EP21-1024 PRO	
Default Battery System Voltage	12VDC					24VDC				
INVERTER OUTPUT										
Rated Power	300W	400W	500W	600W	800W	1000W	600W	800W	1000W	
Surge Rating	900VA	1200VA	1500VA	1800VA	2400VA	3000VA	1800VA	2400VA	3000VA	
Waveform	Pure sine wave									
Voltage Regulation	Battery mode: 220 or 230VAC Line mode: 220~240VAC									
Output Frequency	50Hz / 60Hz									
Inverter Frequency (Peak)	>75%						>81%			
Bypass Efficiency	>95%									
Output Transfer Time	Typical:8ms 12ms(max)									
AC INPUT										
Voltage	220 / 230 / 240VAC									
Selectable Voltage Range	140~280VAC ±5%									
Low Battery Alarm	140VAC ±5%									
Low Voltage Recover	150VAC ±5%									
High Battery Alarm	280VAC ±5%									
High Voltage Recover	270VAC ±5%									
Low Frequency Alarm	45 ±5Hz									
Low Frequency Recover	46 ±5Hz									
High Frequency Alarm	65 ±5Hz									
High Frequency Recover	64 ±5Hz									
Nominal Input Range	50Hz / 60Hz ±5Hz									
AC Auto Restart	YES									
BATTERY										
Minimum Start Voltage	Low Battery Voltage Cut Off+0.5V					Low Battery Voltage Cut Off+0.5V				
Low Battery Voltage Alarm	Low Battery Voltage Cut Off+0.5V					Low Battery Voltage Cut Off+1.0V				
Min Voltage For Power On	Shutdown voltage +0.5V					Shutdown voltage +1V				
Low Battery Voltage Cut Off	10-12.0VDC					20.0-24.0VDC				
High Battery Voltage Alarm	(13.8-14.5V)+1V for 12VDC mode (*2 for 24VDC)									
AC CHARGE										
Floating Voltage	13.5-14.5VDC					27-29VDC				
Boost Voltage	13.8~14.5VDC					27.6~29VDC				
Maximum Charge Current	300W 10A	400W 10A	500W 15A	600W 20A	800W 25A	1000W 30A	600W 10A	800W 15A	1000W 15A	
BYPASS & PROTECTION										
Input Waveform	Pure sine wave									
Input Frequency	50Hz or 60Hz									
Overload Protection	>110%~125% Load fault after 60s; >125%~150% Load fault after 3s; >150% Load fault after 500ms									
Over Temperature Protection	≥90°C									
Bypass Output Protection	10A 250VAC									
Output Circuit Protection	YES									
Battery Reverse Protection	Optional									
Battery Low Voltage Protection	YES									
Battery High Voltage Protection	YES									
Bypass Breaker Rating	10A									
Maximum Bypass Current	10A									
MECHANICAL SPECIFICATION										
Machine Dimension (W*H*D)(mm)	300.5*319*132.2									
Package Dimension (W*H*D)(mm)	391*325*187									
N.W(kg)	/									
G.W(kg)	/									
Operating Temperature	0°C~40°C 0~90% relative humidity (non-condensing)									
Storage Temperature	-15°Cto 55°C									
Altitude	≤1000M									
Audible Noise	≤60dB									
Display	LED+LCD									
Cooling Mode	Fan cooling									
Fan Starting	>45°Cstarting, <30°C Closing									
Communication	USB									
CERTIFICATION & STANDARDS										
CE-LVD (EN IEC62109-1:2010, EN IEC62109-2:2011)										
CE-EMC+LVD (EN6100-6-4:2007, EN6100-6-2:2005+EN IEC62109-1:2010, EN IEC62109-2:2011)										
IEC60950-1:2005A+1:2009+A2:2013										
EN IEC62040-1:2019										

*The technical specifications of this document are subject to change without any notice

POWER INVERTER/CHARGER EP2000 PRO Series


300W~1000W | 12V/24V | 10~30A

EP2000 PRO series inverter is a cost effective, intelligent with UPS function. The comprehensive LCD offers user-configurable and easy-accessible button adjustment such as battery charge current, battery charge voltage, frequency, buzzer etc. It's perfect for the user who need a simple and economical inverter, with user-friendly installation and setting. Tower and rack design available for different choices.




- Rated power 300W to 1000W
- Pure sine wave output
- Smart LCD setting (frequency , charge voltage, charge current, etc).
- 3 steps charging algorithm
- Built in AVR function
- Overload and short-circuit protection
- Battery reverse polarity protection (Optional)
- Deep discharge protection
- Cold start function

Back panel description

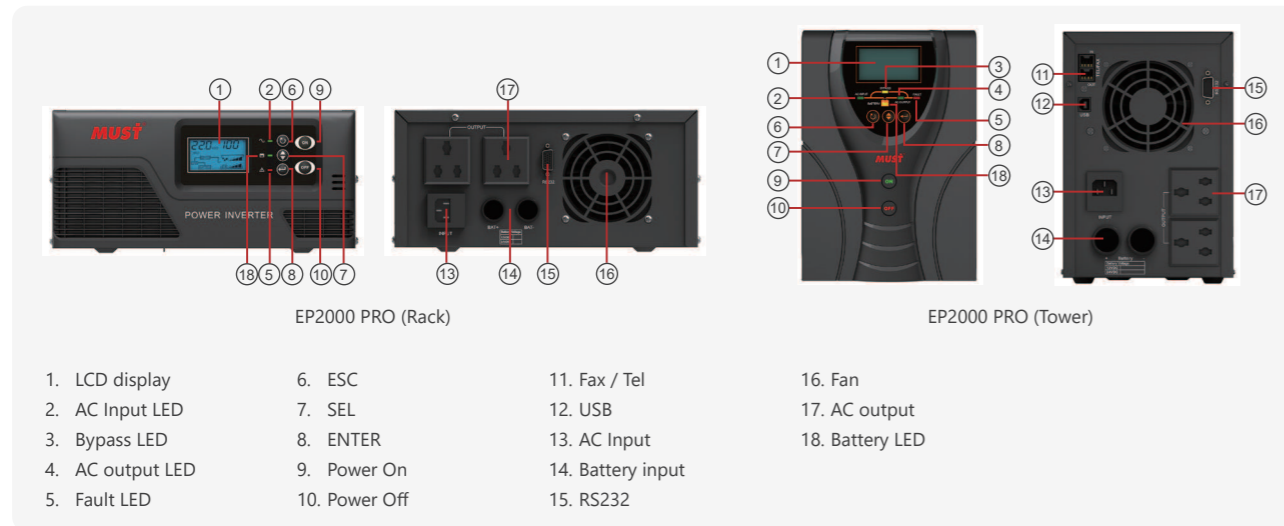

Solar system connection

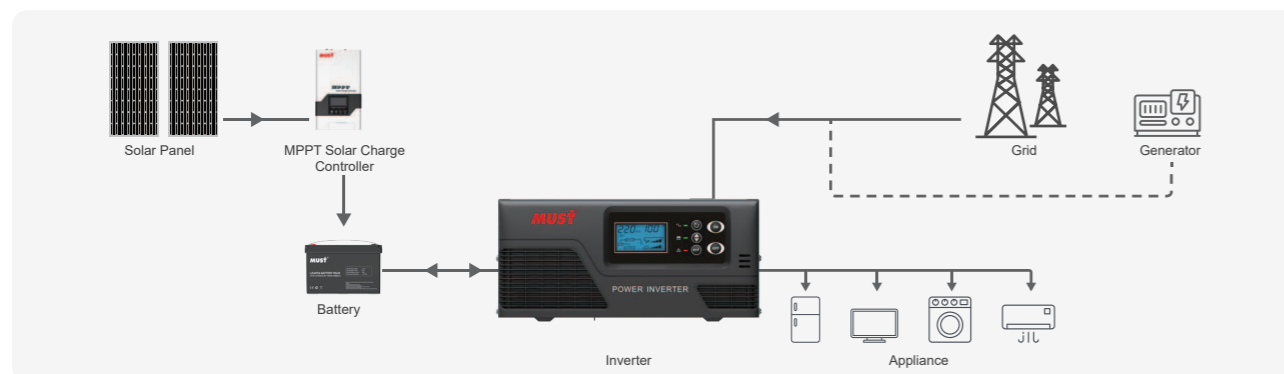

MODEL	EP20-0312 PRO	EP20-0612 PRO	EP20-0812 PRO	EP20-1012 PRO	EP20-0324 PRO	EP20-0624 PRO	EP20-0824 PRO	EP20-1024 PRO
Default Battery System Voltage	12VDC				24VDC			
INVERTER OUTPUT								
Rated Power	300W	600W	800W	1000W	300W	600W	800W	1000W
Surge Rating	900VA	1800VA	2400VA	3000VA	900VA	1800VA	2400VA	3000VA
Waveform	Pure sine wave							
Voltage Regulation	Battery mode: 220 or 230VAC Line mode: 220~240VAC							
Output Frequency	50Hz / 60Hz							
Inverter Frequency (Peak)	>75%				>81%			
Bypass Efficiency	>95%							
Output Transfer Time	Typical:8ms 12ms(max)							
AC INPUT								
Voltage	220 / 230 / 240VAC							
Selectable Voltage Range	140~280VAC ±5%							
Low Battery Alarm	140VAC ±5%							
Low Voltage Recover	150VAC ±5%							
High Battery Alarm	280VAC ±5%							
High Voltage Recover	270VAC ±5%							
Low Frequency Alarm	45 ±5Hz							
Low Frequency Recover	46 ±5Hz							
High Frequency Alarm	65 ±5Hz							
High Frequency Recover	64 ±5Hz							
Nominal Input Range	50Hz / 60Hz ±5Hz							
AC Auto Restart	YES							
BATTERY								
Minimum Start Voltage	Low Battery Voltage Cutoff+0.5V				Low Battery Voltage Cutoff+1.0V			
Low Battery Voltage Alarm	Low Battery Voltage Cutoff+0.5V				Low Battery Voltage Cutoff+1.0V			
Low Battery Voltage Cut Off	10-12.0VDC				20.0-24.0VDC			
High Battery Voltage Alarm	(13.8-14.5V)+1V for 12VDC mode (*2 for 24VDC)							
AC CHARGE								
Floating Voltage	13.5-14.5VDC				27-29VDC			
Boost Voltage	13.8~14.5VDC				27.6~29VDC			
Maximum Charge Current	300W 10A	600W 20A	800W 25A	1000W 30A	300W 5A	600W 10A	800W 15A	1000W 15A
BYPASS & PROTECTION								
Input Waveform	Pure sine wave							
Input Frequency	50Hz or 60Hz							
Overload Protection	110%~125% Load fault after 60s; 125%~150% Load fault after 3s; >150% Load fault after 500ms							
Over Temperature Protection	≥90°C							
Bypass Output Protection	10A 250VAC							
Output Circuit Protection	YES							
Battery Reverse Protection	Optional							
Battery Low Voltage Protection	YES							
Battery High Voltage Protection	YES							
Bypass Breaker Rating	10A							
Maximum Bypass Current	10A							
MECHANICAL SPECIFICATION								
Machine Dimension (W*H*D)(mm)	315*145*210							
N.W(kg)	300W 7.5	600W 10.7	800W 12.5	1000W 13.5	300W 7.5	600W 10.7	800W 12.5	1000W 13.5
Package Dimension (W*H*D)(mm)	420*280*225							
G.W(kg)	300W 8	600W 11.5	800W 13	1000W 14.0	300W 8	600W 11.5	800W 13	1000W 14
OTHER								
Operating Temperature	0°C~40°C 0~90% relative humidity (non-condensing)							
Storage Temperature	-15°C to 55°C							
Altitude	≤1000M							
Audible Noise	≤60dB							
Display	LED+LCD							
Cooling Mode	Fan cooling							
Fan Starting	>45°C starting, <30°C Closing							
Communication	USB							
CERTIFICATION & STANDARDS								
CE-LVD (EN IEC62109-1:2010, EN IEC62109-2:2011)								
CE-EMC+LVD (EN6100-6-4:2007, EN6100-6-2:2005+EN IEC62109-1:2010, EN IEC62109-2:2011)								
IEC60950-1:2005A+1:2009+A2:2013								
EN IEC62040-1:2019								

*The technical specifications of this document are subject to change without any notice

LOW FREQUENCY PURE SINE WAVE INVERTER EP3000 PRO Series

8~12KW | 48V | 100~140A

Low frequency pure sine wave combined inverter&A/C charger EP3000 PRO Series 8~12kw; Quiet,high efficiency operation front panel LED+LCD indicators and adjustable switch selectors selectable settings for flooded lead acid,Gel,or absorbed glass mat(AGM) batteries. Mainly for home and office appliances such as TV, refrigerator, fans lights and computers etc.




- Rated power 8KW to 12KW
- Pure sine wave output
- Max 140A automatic 3-stage battery charger
- Charger current is Adjustable (0-100%)
- Automatically send signal to start generator
- Supporting USB communication and BTS & AGS port
- Battery/AC priority

Back panel description

1. Power saver on/off switch	10. AC input/output breaker
2. Inverter indicator	11. Ground
3. Grid indicator	12. AC output
4. Fault indicator	13. AC input
5. Function	14. WIFI Communication port
6. LCD display	15. USB Communication port
7. Remote panel	16. AGS Communication port
8. BAT-	17. BTS Communication port
9. BAT+	18. FAN

Solar system connection

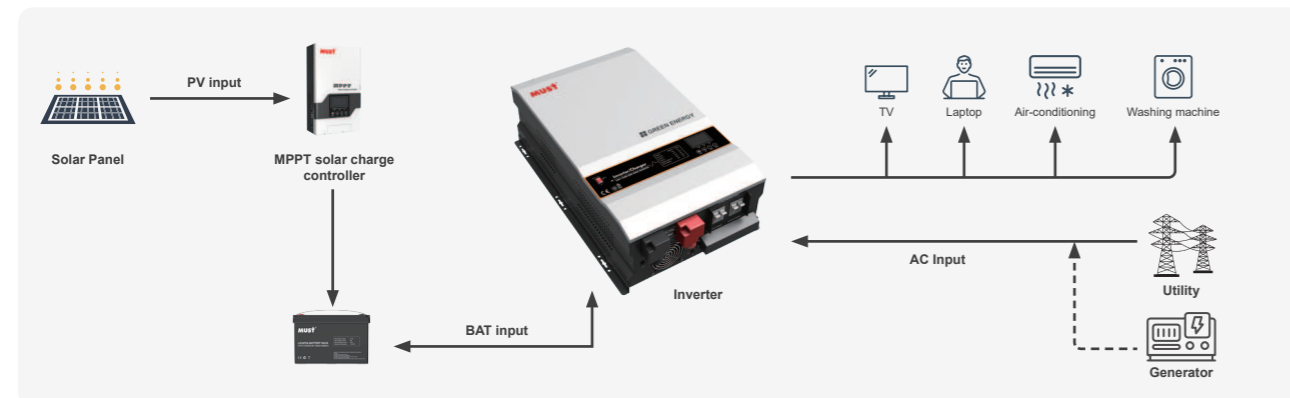

MODEL	EP30-8048 PRO	EP30-10048 PRO	EP30-12048 PRO
Nominal Battery System Voltage	48VDC	48VDC	48VDC
INVERTER OUTPUT			
Continuous output power	8.0KW	10.0KW	12.0KW
Surge rating	24000VA	30000VA	36000VA
Capable Of Starting Electric Motor	4HP	5HP	6HP
Output waveform	Pure sine wave / same as input (bypass mode)		
Inverter Efficiency(Peak)	>88%		
Line mode efficiency	>95%		
Power factor	1.0		
Nominal output voltage RMS	220V / 230V / 240VAC ±10% (RMS)		
Output frequency	50Hz		
Short circuit protection	Yes (1sec after fault)		
Typical transfer time	10ms(max)		
AC INPUT			
Voltage	90-280VAC		
Selectable Voltage Range	170-280VAC(For Personal Computers)		
Frequency Range	50Hz / 60Hz		
BATTERY			
Minimum start voltage	40.0V±0.6 / 42.0V±0.6		
Low Battery Voltage Alarm	42-50VDC		
Low Battery Voltage Cut Off	40.0V±0.6 / 42.0V±0.6		
High Battery Voltage Alarm	60VDC		
High Battery Voltage Recover	57VDC		
Energy Saving Mode	<60W when power saver on		
CHARGER			
Output voltage	Depends on battery type		
Charger AC input breaker rating	80A		
Max charge power rate	1/3 Rating power		
Overcharge protection S.D.	62.8VDC		
Maximum Charge Current	100A	120A	140A
BTS			
Temperature rate @25°C	4mv charging voltage descent, per 1°C rise		
BYPASS & PROTECTION			
Input voltage waveform	Sine wave (grid or generator)		
Nominal voltage	220V / 230V / 240VAC		
Max input AC voltage	300VAC for 230VAC HV mode		
Nominal input frequency	50Hz or 60Hz		
Overload protection (SMPS load)	Circuit breaker		
Output short circuit protection	Circuit breaker		
Bypass breaker rating	63A		
Max bypass current	63Amp		
MECHANICAL SPECIFICATIONS			
Mounting	Wall mount		
Machine Dimension (W*H*D)	410*670*215mm		
Package Dimension (W*H*D)	/	/	/
N.W	/	/	/
G.W	/	/	/
OTHER			
Operating Temperature Range	0°C to 40°C		
Storage Temperature	-15°C to 60°C		
Audible Noise	60dB MAX		
Display	LED+LCD		
Loading(20GP/40GP/40HQ)	200pcs / 400pcs / 500pcs		
CERTIFICATION & STANDARDS			
//////////			

*The technical specifications of this document are subject to change without any notice

LOW FREQUENCY POWER INVERTER EP3000 PLUS Series

1~6kW | 230V | WIFI | BMS

EP3000 PLUS series is a very economical pure sine wave inverter, with AC charger from 20A to 60A; Solar/AC priority is configurable, when setting solar priority, solar will charge batteries as first priority, and AC can also charge batteries when solar charger current is too lower. With pure copper transformer, it enables inverter to operate with all kinds of home appliances.



- 3 Steps charging
- Overload and short-circuit protection
- Set charging voltage/charging current.
- Battery low voltage shutdown point can be set to 10/10.5/11/11.5V/ 12V
- Power-save mode
- Set utility priority/ Battery priority
- Set utility input wide/narrow range
- Inverter voltage can be set to 220V:220V/230V/240V
- Inverter frequency can be set to 50/60Hz
- Set utility charging on/off switch
- Acid or Litiuum select
- WIFI remote monitoring (optional)
- With BMS lithium battery communication function (CAN port)

Back panel description

1~3K

4~6K

1. BAT -

2. BAT +

3. GND

4. AC input

5. AC output

6. AC input protect

7. AC Output 10A(MAX)

8. Remote port

9. BAT CAN

10. AGS


11. USB port

12. WiFi port

13. Power on/off switch

14. FAN

Solar system connection

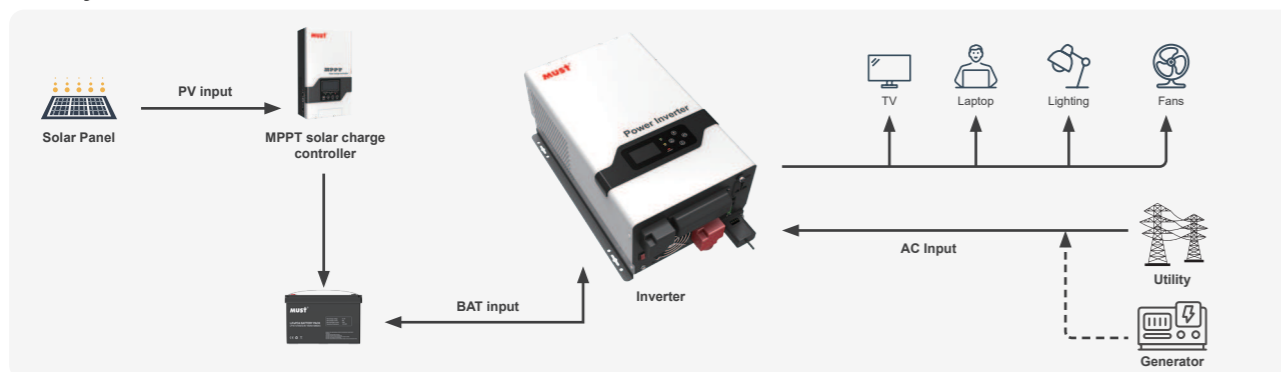

MODEL	EP30-1012 PLUS	EP30-1024 PLUS	EP30-1512 PLUS	EP30-1524 PLUS	EP30-2012 PLUS	EP30-2024 PLUS	EP30-3024 PLUS	EP30-3048 PLUS	EP30-4024 PLUS	EP30-4048 PLUS	EP30-5048 PLUS	EP30-6048 PLUS
Nominal Battery System Voltage	12VDC	24VDC	12VDC	24VDC	12VDC	24VDC	24VDC	48VDC	24VDC	48VDC	48VDC	48VDC
INVERTER OUTPUT												
Rated Power	1KW	1.5KW	2KW	3KW	4KW	5KW	6KW					
Surge Rating	3000VA	4500VA	6000VA	9000VA	12000VA	15000VA	18000VA					
Capable Of Starting Electric Motor	1HP	1HP	1HP	2HP		3HP						
Waveform	Pure sine wave / same as input (bypass mode)											
Nominal Output Voltage RMS	220V / 230V / 240VAC ±10% (RMS)											
Output Frequency	50Hz / 60Hz ±0.3Hz											
Inverter Efficiency (Peak)	>88%											
Line Mode Efficiency	>95%											
Power Factor	1.0											
Typical Transfer Time	10ms(max)											
Overload	100% < Load < 110% (alarm 5min then stop output and fault code 07) 110% < Load < 125% (alarm 60s then stop output and fault code 07) Load > 125% (alarm 10s then stop output and fault code 07)											
AC INPUT												
Voltage	230VAC											
Selectable Voltage Range	155~265VAC(For personal computers)											
Frequency Range	50Hz / 60Hz(Auto sensing) 40~80Hz											
BATTERY												
Minimum Start Voltage	(10V/ 10.5V/ 11V/ 11.5/ 12V)+0.5V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)											
Low Battery Voltage Alarm	(10V/ 10.5V/ 11V/ 11.5V/ 12V)+0.5V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)											
Low Battery Voltage Cut Off	10V/ 10.5V/ 11V/ 11.5V/ 12V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)											
High Battery Voltage Alarm	(12-14.5V)+1V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)											
High Battery Voltage Recover	(12-14.5V)+0.5V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)											
Energy Saving Mode	Load ≤100±20W(220V)											
CHARGER												
Output Voltage	Depends on battery type											
Charge AC Input Breaker Rating (230V)	1-3K/30A						4-6K/50A					
Overcharge Protection S.D.	15.7VDC for 12VDC mode (*2 for 24VDC mode, *4 for 48VDC mode)											
Maximum Charge Current	30A	20A	45A	25A	60A	30A	40A	20A	60A	30A	35A	40A
BYPASS & PROTECTION												
Input Voltage Waveform	Sine wave (grid or generator)											
Nominal Input Frequency	50Hz or 60Hz											
Overload Protection (SMPS Load)	Circuit breaker											
Output Short Circuit Protection	Circuit breaker											
AC Input Breaker	1-3K/30A						4-6K/50A					
MECHANICAL SPECIFICATIONS												
Mounting	Wall Mount											
Machine Dimension (W*H*D)(mm)	303*493*200mm						305*531*202mm					
Package Dimension (W*H*D)(mm)	615*400*319mm						686*400*319mm					
N.W(kg)	14.8kg	15kg	18.8kg	17.1kg	19.5kg	18.6kg	20.3kg	20.1kg	31kg	29.5kg	30.9kg	34.5kg
G.W(kg)	16.3kg	16.5kg	20.3kg	18.6kg	21kg	20.1kg	21.8kg	21.6kg	32.5kg	31kg	32.4kg	36kg
OTHER												
Operating Temperature Range	0°C to 40°C											
Storage Temperature	-15°C to 60°C											
Audible Noise	60dB MAX											
Display	LED+LCD											
Standard Warranty	1 year, 2 or 3 years optional (IP20)											
CERTIFICATION & STANDARDS												
CE-EMC+LVD(EN6100-6-3, EN6100-6-1+EN IEC62109-1, EN IEC62109-2) IEC60950-1 A1+A2; CE-EMC+LVD,EN62040-2,EN62040-1												

*The technical specifications of this document are subject to change without any notice

HIGH FREQUENCY POWER INVERTER EP5000 Series


3~5KW | 230V | WIFI | BAT-CAN

This is a multi-function inverter/charger, combining functions of inverter, battery charger to offer uninterruptible power with portable size. Its comprehensive LCD display offers user-configurable and easy-accessible button operation such as battery charging current, AC charger, and acceptable input voltage based on different applications.



- Pure sine wave inverter
- Configurable input voltage range For home appliances and personal computers via LCD setting Configurable battery charging current based on applications via LCD setting
- Configurable AC Charger via LCD setting
- Compatible to mains voltage or generator power
- Auto restart while AC is recovering
- Overload/Over temperature/short circuit protection
- Smart battery charger design For optimized battery performance
- Cold start Function

Back panel description

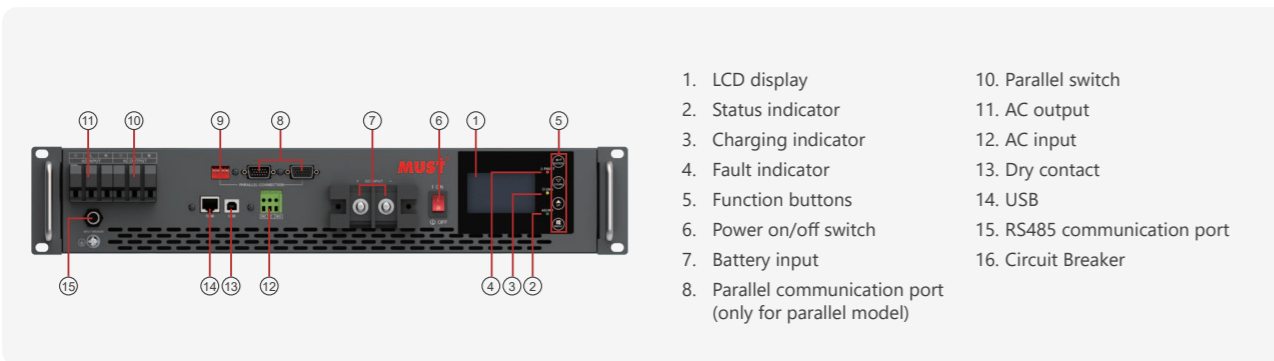

Solar system connection



MODEL	EP50-3KW	EP50-4KW	EP50-5KW
Rated output power	3000W	4000W	5000W
AC INPUT			
Nominal Input Voltage	230Vac±5%		
Selectable Voltage range	AC 185V~270V		
Frequency Range	50Hz/60Hz (Auto sensing)		
Inverter Efficiency(Peak)	97%		
INVERTER OUTPUT			
Output voltage waveform	Pure sine wave		
Output Voltage Regulation	220Vac ± 5%		
Output Frequency	50Hz		
Power Factor	1		
Transfer Time	10ms typical		
Peak Efficiency	92%		
Nominal DC Input Voltage	48VDC		
Cold Start Voltage	46VDC		
Output Short Circuit Protection	Line mode	Circuit Breaker	
	Battery mode	Electronic Circuits	
BATTERY			
Battery voltage	48VDC (±0.5)		
Floating voltage	54V		
CHARGER			
Charging Current(UPS) @Nominal Input Voltage	Default:30A; MAX:60A		
Bulk Charging Voltage	56.4Vdc		
Floating Charging Voltage	54Vdc		
Charging Algorithm	3-Step		
GENERAL			
Mounting	Rack mount		
Display	LED+LCD		
Parallel operation	3 units		
Operation Temperature Range	0°C to 40°C		
Storage Temperature	-15°C to 60°C		
Machine Dimension (W*H*D)	468*86.3*400mm		
Package Dimension (W*H*D)	/		
N.W	/		
G.W	/		
CERTIFICATION & STANDARDS			
CE			

*The technical specifications of this document are subject to change without any notice

HIGH FREQUENCY POWER INVERTER EP5000 PRO Series


5.2KW | 230V | WIFI | BAT-CAN

This is a multi-function inverter/charger ,combining Functions of inverter, battery charger to offer uninte uninterruptible power with portable size. Its comprehensive LCD display offers user-configurable and easy-accessible button operation such as battery charging current, AC charger, and acceptable input voltage based on different applications.




- Pure sine wave inverter
- Configurable input voltage range For home appliances and personal computers via LCD setting Configurable battery charging current based on applications via LCD setting
- Configurable AC Charger via LCD setting
- Compatible to mains voltage or generator power
- Auto restart while AC is recovering
- Overload/Over temperature/short circuit protection
- Smart battery charger design For optimized battery performance
- Cold start Function
- WIFI remote monitoring (optional)

Back panel description

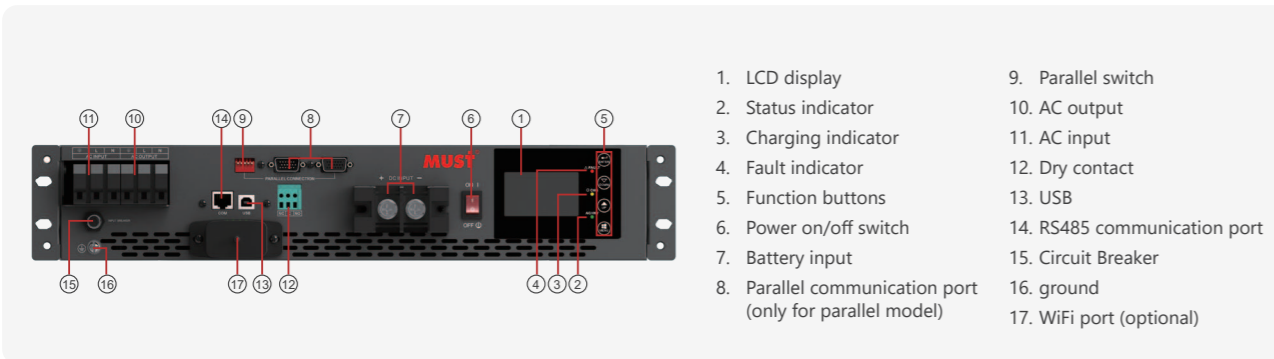

Solar system connection

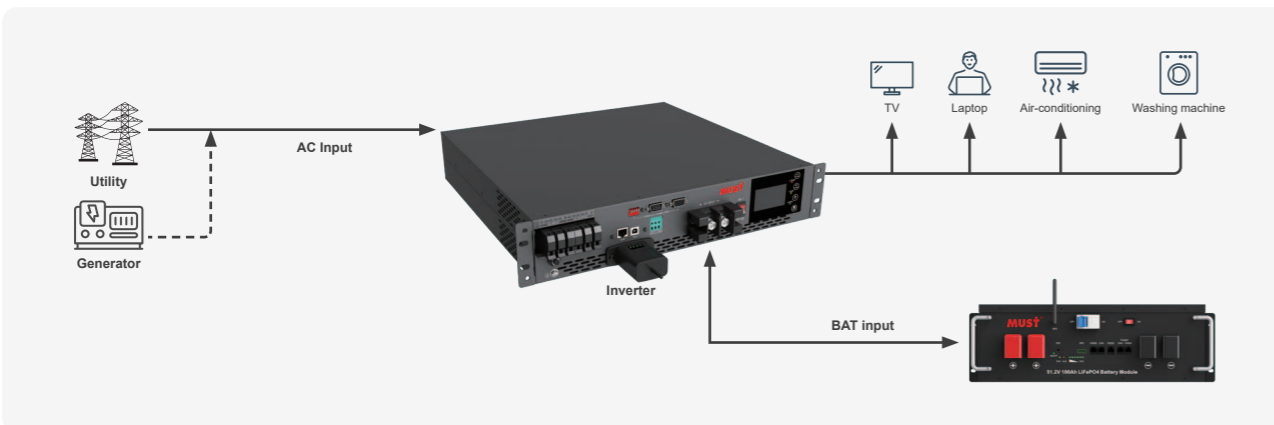

MODEL	EP50-5248 PRO
Rated output power	5200VA/5200W
AC INPUT	
Nominal Input Voltage	230Vac±5%
Selectable Voltage range	170~280VAC(UPS) / 90~280VAC(APL) / 184~253VAC(VED4105)
Frequency Range	50Hz/60Hz (Auto sensing)
Inverter Efficiency(Peak)	90%
INVERTER OUTPUT	
Output voltage waveform	Pure sine wave
Output Voltage Regulation	230Vac ± 5%
Output Frequency	50Hz / 60Hz(Auto sensing)
Power Factor	≈1
Transfer Time	10ms (UPS / VDE4105) / 20ms (APL) □50ms(For parallel operation)
Nominal DC Input Voltage	48VDC
Cold Start Voltage	46VDC
Output Short Circuit Protection	Line mode: Circuit Breaker Battery mode: Electronic Circuits
BATTERY	
Battery voltage	48VDC
Floating voltage	54.8V
Overcharge Protection	60V
CHARGER	
Charging Current(UPS) @Nominal Input Voltage	Default:30A; MAX:80A
Bulk Charging Voltage	56.4Vdc
Floating Charging Voltage	54Vdc
Charging Algorithm	3-Step
GENERAL	
Mounting	Rack mount
Display	LED+LCD
Parallel operation	3 units
Operation Temperature Range	-10°C to 50°C
Storage Temperature	-15°C to 60°C
Machine Dimension (W*H*D)	468*86.3*400mm
Package Dimension (W*H*D)	/
N.W	11kg
G.W	/
CERTIFICATION & STANDARDS	
CE	

*The technical specifications of this document are subject to change without any notice

ON/OFF GRID HYBRID SOLAR INVERTER PH1100 PRO Series

3.6~6KW | Single Phase | IP66 | WIFI | BMS




This is a flexible and intelligent energy storage solar inverter with a wide range of MPPT Voltage. Combining functions of off grid and on grid. This hybrid solar inverter can power all kinds of appliances in home or office, and can also be used in power stations.




- Multiple operation modes: Grid-tie, off grid with storage backup
- IP66 water-proof and dust-proof
- MPPT voltage range 120-500V
- Support LCD display & Smart LCD setting
- Available Export control CT sensor function
- Multiple communications: USB, RS485, GPRS and wifi etc
- Full protection function: Over-voltage, over-frequency, over-current, over-temperature, and AC short-circuit automatic protection
- Intelligent BMS battery management function
- Fanless low-noise design
- Wifi monitoring

Back panel description

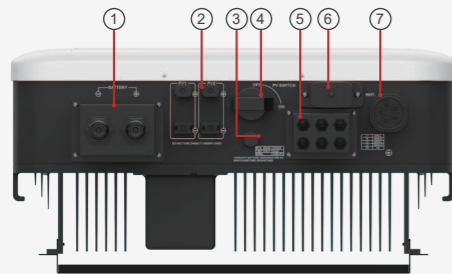

1. Battery input terminals and cover
2. PV input terminals
3. Breather valve
4. PV input switch
5. BTS terminals, BMS terminals, load monitor terminals, dry contact terminals, CAN communication terminals, USB terminal and cover
6. Wi-Fi com module
7. AC input & output terminals and cover

Solar system connection

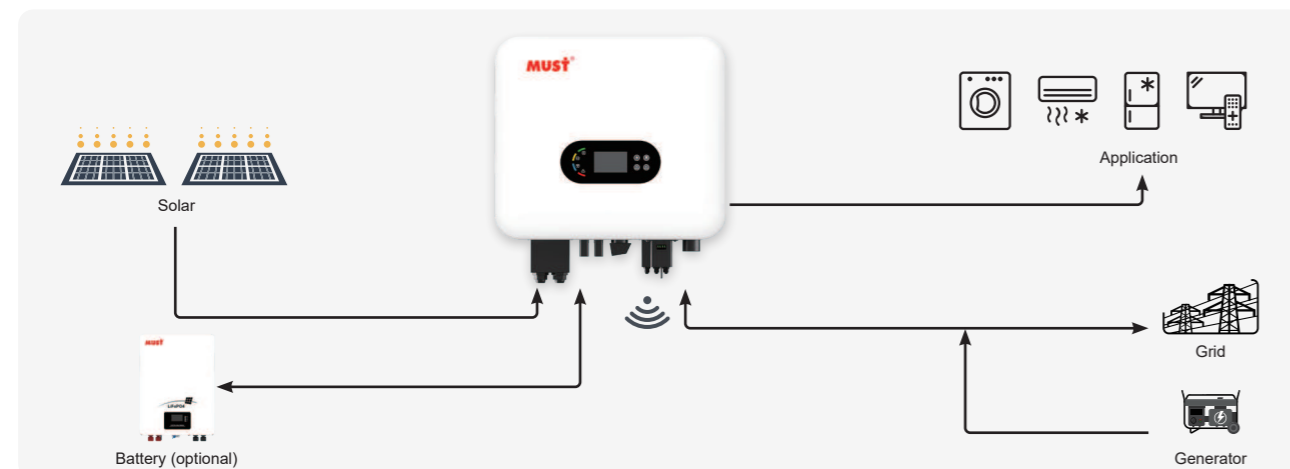

MODEL	PH11-3648 PRO	PH11-4048 PRO	PH11-4648 PRO	PH11-5048 PRO	PH11-6048 PRO
Rated power	3600W	4000W	4600W	5000W	6000W
Nominal Battery System Voltage	48V				
PV INPUT(DC)					
Maximum recommended DC power	4700W	5200W	6000W	6500W	7800W
Nominal DC operating voltage	360V				
Maximum DC voltage	500V				
MPPT voltage range	120V~500V				
Maximum input current	15A / 15A				
No. of MPP tracker	2				
Strings per MPP tracker	1				
INVERTER INPUT/ OUTPUT(AC)					
Nominal AC input/ output power	3600W	4000W	4600W	5000W	6000W
Nominal input/ output voltage; range	220/230/240V; 180-280V				
AC grid frequency; range	50/60Hz; 45~55/55-65Hz				
Nominal input/ output current	15.6A	17.5A	20A	21.7A	26A
Maximum input/ output current	16A	18.1A	20.8A	22.7A	27.2A
Inrush current (spike/duration)	57.5A/5.2us				
Total harmonic distortion i(THDi)	<3%				
Power factor at rated power	1				
Displacement power factor	0.8leading~0.8lagging				
Grid type	Single phase				
BATTERY MODE OUTPUT(AC)					
Output Rated Power	3600W	4000W	4600W	5000W	6000W
Nominal output voltage; accuracy range	230±1%				
Output frequency; accuracy range	50/60Hz (optional)±0.2%				
Output rated current	15.6A	17.5A	20A	21.7A	26A
Output waveform	Pure sine wave				
Peak power	5400W,10s	6000W,10s	6900W,10s	7500W,10s	9000W,10s
Total harmonic distortion v (linear load)	<3%				
BATTERY & CHARGER					
Battery type	Lead-acid battery / Lithium battery				
Battery voltage	48V				
Battery voltage range	40~60V				
Charging curve	3-stage adaptive with maintenance				
Protection	Over-current protection / Over-temperature protection				
Maximum charging power	3600W	4000W	4600W	5000W	6000W
Maximum charging current	75A	85A	95A	100A	125A
EFFICIENCY					
Maximum efficiency	97.1%				
Euro-efficiency	96.5%				
MPPT efficiency	99.8%				
PROTECTION DEVICES					
DC switch rating for each MPPT; Grid monitoring; Output over current protection; Output overvoltage protection-varistor; Ground fault monitoring; Integrated all-pole sensitive leakage current					
GENERAL					
Machine Dimension (W*H*D)(mm)	420*480*215				
Package Dimension (W*H*D)(mm)	610*327*595				
N.W(kg)	30				
G.W(kg)	32				
DC connection	H4 / MC4				
AC connection	Terminal Block				
Display	LED+LCD				
Communication interfaces	Wi-Fi / USB / GPRS / RS485				
Ingress protection rating	IP66				
Humidity	0~95% RH(No condensing)				
Operating temperature range	-25°C+60°C With derating above 45°C				
Cooling concept	Natural				
Altitude	<3000m				
CERTIFICATION & STANDARDS					
CE-EMC+LVD (EN6100-6-3: 2007, EN6100-6-1:2017+EN IEC62109-1:2010, EN IEC62109-2:2011); CE-LVD(EN62477-1:2022); IEC60529; EN50549-1:2019 Poland Type A, (NC RfG:2016, PSE:2018, PTPIREE:2021); C10/C11; UNE217001-2020; UNE217002-2020, NTS-631:2021 (Type A); G98+G99					

*The technical specifications of this document are subject to change without any notice

SINGLE PHASE HYBRID INVERTER PH1100 EU Series



8~12KW | Single Phase | IP65

The PH1100 EU Series single-phase hybrid inverter is the ideal gateway to an all-round energy transition in the home. As a PV and battery inverter in one, it ensures a reliable and sustainable supply of energy. The power range is from 8kW to 12kW, compatible with low voltage (40-60V) batteries. Energy management is based on time-of-use and demand charge rate structures, which significantly reduce the amount of energy purchased from the public grid.




- Colorful touch LCD
- IP65 protection degree
- Max. charging/discharging current of 250A
- Ac coupling to retrofit existing solar system
- Max. 16 pcs parallel for on-grid and off-grid operation
- Support multiple batteries parallel
- 6 time periods for battery charging/discharging
- Support storing energy from diesel generator
- Wifi monitoring

Back panel description

1. DC switch
2. Battery input connectors
3. BTS terminals, BMS terminals, load monitor terminals, dry contact terminals, CAN communication terminals, USB terminal and cover
4. Circuit breaker of Grid
5. Load
6. Generator input
7. WiFi Interface
8. Ground
9. PV input

Solar system connection

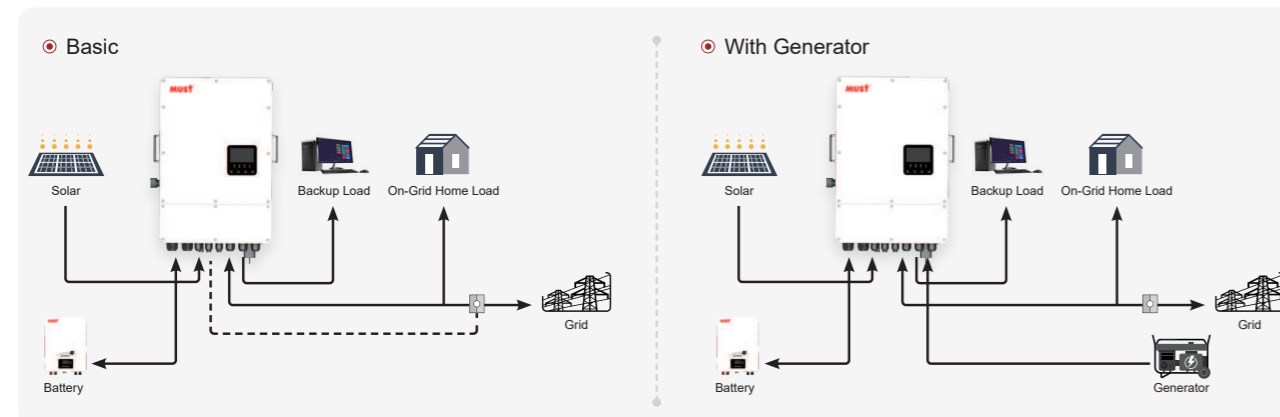

MODEL	PH11-8KL1-EU	PH11-10KL1-EU	PH11-12KL1-EU
Rated power	8000W	10000W	12000W
BATTERY INPUT DATA			
Battery type	Lead-acid battery / Lithium battery		
Battery voltage range	40~60V		
Max. Charging Current	190A	220A	250A
Max. Discharging Current	190A	220A	250A
External Temperature Sensor	Yes		
Charging Curve	3 Stages / Equalization		
Charging Strategy for Li-Ion Battery	Self-adaption to BMS		
PV STRING INPUT DATA			
Max. DC Input Power	10400W	13000W	15600W
PV Input Voltage(V)	370V (125V~500V)		
MPPT Range(V)	150~425V		
Full Load DC Voltage Range	200~425V		
Start-up Voltage(V)	125V		
PV Input Current(A)	20+20	26+26+26	26+26+26
No. of MPPT Trackers	2	3	3
No. of Strings Per MPPT Tracker	1+1	1+1+1	1+1+1
AC INPUT/OUTPUT DATA			
Rated AC Output Power	8000W	10000W	12000W
Max AC Output Power	8800W	11000W	13200W
AC Input/Output Rated Current	36.4/34.8A	45.5/43.5A	54.6/52.2A
Max.AC Input/Output Current	40/38.3A	50/47.9A	60/57.4A
Max Continuous AC Passthrough	50A	60A	60A
Peak Power (off grid)	2 times of rated power, 10 S		
Power Factor	0.8 leading - 0.8 lagging		
AC Output Frequency and Voltage	50/60Hz; 220/230Vac		
Grid Type	Single Phase		
Total Harmonic Distortion (THDi)	<3% (of nominal power)		
DC Current Injection	<0.5% (Rated Current)		
EFFICIENCY			
Max. Efficiency	97.6%		
Euro Efficiency	96.5%		
MPPT Efficiency	>99%		
PROTECTION			
Integrated	PV Arc Fault Detection, PV Input Lightning Protection, Anti-islanding Protection, PV String Input Reverse Polarity Protection, Insulation Resistor Detection, Residual Current Monitoring Unit, Output Over Current Protection, Output Shorted Protection, Over Voltage Category		
Surge Protection	DC Type II/ AC Type III	DC Type II/ AC Type II	DC Type II/ AC Type II
Overtoltage Category	DC Type II/ AC Type III	DC Type II/ AC Type III	DC Type II/ AC Type III
GENERAL DATA			
Operating Temperature Range	-40~60°C, >45°C Derating		
Cooling	Smart cooling		
Noise	≤55dB		
Communication with BMS	RS485/CAN		
Monitoring mode	WiFi/ APP		
Machine Dimension (W*H*D)(mm)	426*526*255 (Excluding connectors and brackets)	446*576*254 (Excluding connectors and brackets)	
Package Dimension (W*H*D)(mm)	/	/	
N.W(kg)	29	31	
G.W(kg)	/	/	
Protection Degree	IP65		
Installation Style	Wall-mounted		
Warranty	5 Year		
CERTIFICATION & STANDARDS			
Grid Regulation: IEC 61727/IEC 62116, EN 50549-1; Safety EMC / Standard: IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2			

*The technical specifications of this document are subject to change without any notice

ON/OFF GRID HYBRID SOLAR INVERTER PH1100 EU Series


5~12KW | Three Phase | 380VAC

PH1100 EU is brand new three phase hybrid inverter with low battery voltage 48V, ensuring system safe and reliable. With compact design and high-power density, this series supports 1.3 DC/AC ratio, saving device investment. It supports three phase unbalanced output, extending the application scenarios. Equipped with CAN port (x2) BMS and parallel, x1 RS485 port for BMS, x1 RS232 port for remotely control, x1 DRM port, which makes the system smart and flexible.




- 100% unbalanced output, each phase max. output up to 50% rated power
- Max. 6 pcs parallel for on-grid and off-grid operation
- AC couple to retrofit existing solar system
- Support multiple batteries parallel
- Max. charging/discharging current of 240A
- Support storing energy from diesel generator
- 48V low voltage battery, transformer isolation design
- IP66 water-proof and dust-proof
- "Time of use" function: a maximum of 6 time segments can be set
- Wifi monitoring

Back panel description

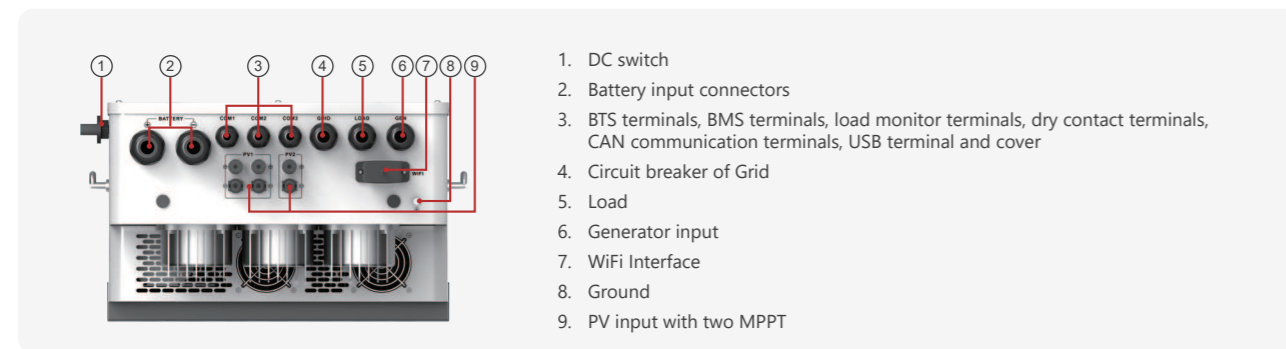

Solar system connection

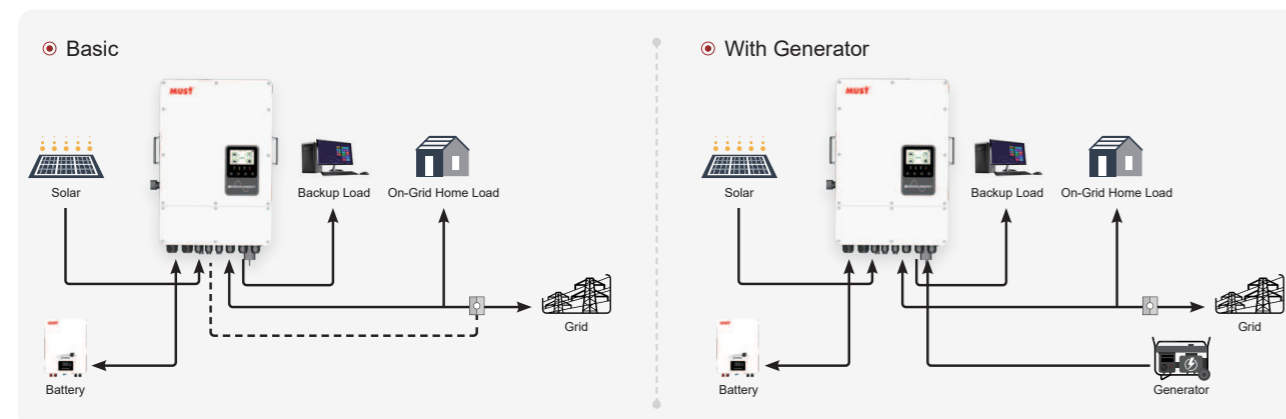

MODEL	PH11-5KL3-EU	PH11-6.5KL3-EU	PH11-8KL3-EU	PH11-10KL3-EU	PH11-12KL3-EU
Rated power	5000W	6500W	8000W	10000W	12000W
BATTERY INPUT DATA					
Battery type	Lead-acid battery / Lithium battery				
Battery voltage	48V				
Battery voltage range	40~64V				
Charging curve	3-stage adaptive with maintenance/Equalization				
Charging Strategy for Li-Ion Battery	Self-adaption to BMS				
Over-current protection/ Over-temperature protection	Yes / Yes				
Maximum charging/discharging power	5000W	6500W	8000W	10000W	12000W
Maximum charging/discharging current	120A	150A	190A	210A	240A
PV STRING INPUT DATA					
Max. DC Input Power	6500W	8450W	10400W	13000W	15600W
Rated PV Input Voltage	550V				
Maximum DC voltage	800V				
Start-up Voltage	160V				
Minimum voltage for grid connection	310V				
Full Load DC Voltage Range	350-650V				
Enter high voltage error recovery point	800V				
MPPT voltage range	200~650V				
Maximum input current	15A/15A		30A/15A		
No.of MPP Trackers	2				
No.of Strings per MPP Tracker	1+1		2+1		
AC INPUT/OUTPUT DATA					
Rated AC Input/ Output Power	5000W	6500W	8000W	10000W	12000W
Max AC Input/ Output Power	5500W	7150W	8800W	11000W	13200W
AC Input/ Output Rated Current	7.6/7.2A	9.8/9.42A	12.1/11.6A	15.2/14.5A	18.2/17.4A
Max AC Input/ Output Current	8.4/8A	10.8/10.4A	13.4/12.8A	16.7/15.9A	20/19.1A
Max. Three-phase Unbalanced Output Current	11.4/10.9A	14.7/14.1A	18.2/17.4A	22.7/21.7A	27.3/26.1A
Power Factor Adjustment Range	0.8 leading to 0.8 lagging				
Rated Input/Output Voltage	220/380,230/400Vac				
Rated Input/Output Grid Frequency/Range	50/60;45~55/55-65				
Grid Type	Three Phase				
Total Harmonics Current Distortion (THDi)	<3% (of nominal power)				
DC Current Injection	<0.5% In				
EFFICIENCY					
Max. Efficiency	≥97.6%				
Euro Efficiency	97.0%				
PROTECTION					
Integrated	Islanding protection, PV input polarity reverse protection, insulation resistance detection, surge protection, leakage current monitoring protection, output current protection, output short circuit protection, output overvoltage protection				
Surge Protection	DC Type III/AC Type III				
Overvoltage Category	DC Type II/AC Type III				
GENERAL DATA					
Operating Temperature Range (°C)	-25°C to +60°C, >45°C Derating				
Cooling	Fan cooling				
Noise (dB)	≤55dB				
Communication with BMS	RS485/CAN				
Machine Dimension (W*H*D)(mm)	446*692*260 (excluding connectors and racks)				
Package Dimension (W*H*D)(mm)	567*816*404				
N.W(kg)	38				
G.W(kg)	42				
Protection Degree	IP66				
Installation Style	Wall-mounted				
Warranty	5 Years the Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy				
CERTIFICATION & STANDARDS					
CE-EMC+LVD (EN6100-6-3, EN6100-6-1+EN IEC 62109-1, EN IEC 62109-2); CE-LVD(EN 62477-1); IEC 60529; EN50549-1; Poland Type A, (NC RfG:2016, PSE:2018, PTPIREE:2021)C10/C11; UNE217001-2020; UNE217002-2020, NTS-631 (Type A); G98+G99					

*The technical specifications of this document are subject to change without any notice

HIGH VOLTAGE HYBRID SOLAR INVERTER PH1100 EU Series


20-50KW | Three Phase | 380VAC

PH1100 EU series Solar inverter that can connect solar panels and a high voltage battery. This inverter will capture the solar during the day and provide power for your home requirements and charge the battery. At night it will use the battery to satisfy your home requirements. This will prevent you from using any power from the grid and save you from ever paying them a cent.




- Voltage Battery for High Efficiency Operation
- Maximum Charge and Discharge up to 240A
- IP65 Indoor & Outdoor use
- Colorful Touch Screen
- Supports Parallel Connection of Multiple Batteries
- Supports Charging and Discharging in 6 Time Periods
- Monitoring & Remote Upgrade with Wifi Module
- Support Storing Energy from Diesel Generator without External Converter
- 100% Three-Phase Unbalanced Output, Each Phase Output up to 50% of Rated Power
- AC couple to retrofit existing solar system
- Max.Supports up to 10 Units in Parallel for Both On-grid and Off-grid Operation

Back panel description

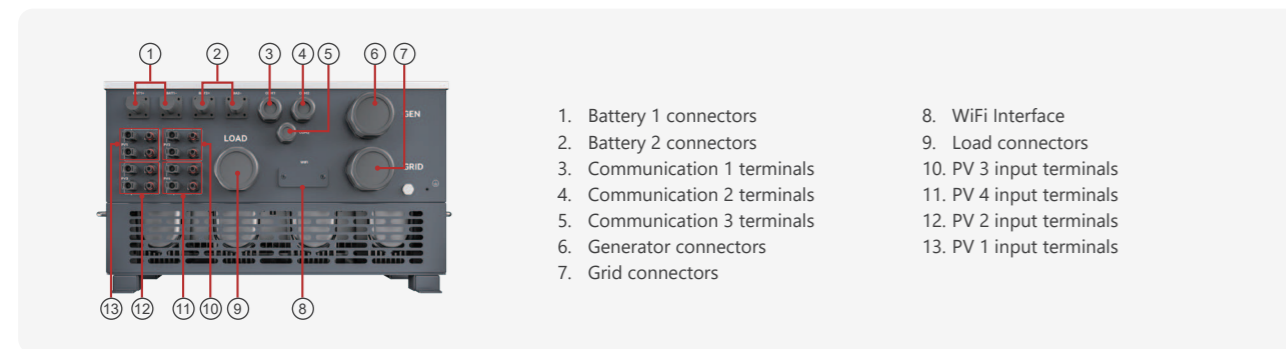

Solar system connection

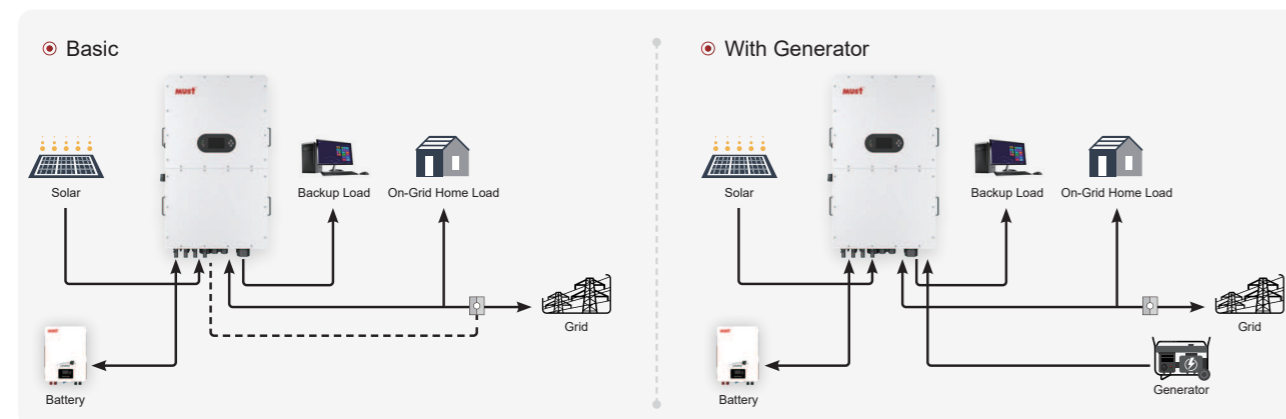

MODEL	PH11-20KL3-EU-HV	PH11-30KL3-EU-HV	PH11-50KL3-EU-HV
PV STRING INPUT			
Max. DC Input Power	26000W	39000W	65000W
Max. DC Input Voltage		1000V	
Start-up Voltage		180V	
MPPT Range		150-850V	
Full Load MPPT Voltage Range	325-850V	450-850V	450-850V
Rated DC Input Voltage		600V	
PV Input Current	26A+26A	36A+36A+36A	36A+36A+36A+36A
Max. PV Isc	39A+39A	55A+55A+55A	55A+55A+55A+55A
No.of MPPT Trackers	2	3	4
No.of Strings per MPPT Tracker	2+2	2+2+2	2+2+2+2
AC OUTPUT			
Rated AC Output Power	20000W	30000W	50000W
Max. AC Output Power	22000W	33000W	55000W
AC Output Rated Current	30.4A	45.6A	76.0A
Max. AC Output Current	33.4A	50.2A	83.6A
Max. Three-phase Unbalanced Output Current	44.7A	60A	83.3A
Max. Continuous AC Passthrough	80A	118A	197A
Peak Power (Off Grid)	1.5 times of rated power, 10s		
Generator Input/Smart Load/AC Couple Current	30.4A/A80A/ 30.4A	45.4A/ 118A/ 45.4A	76A/ 197A/ 76A
Power Factor	0.8 leading - 0.8 lagging		
Output Frequency and Voltage	50/60Hz; 3L/N/PE 220/380Vac 230/400Vac		
Grid Type	Three Phase		
Total Harmonics Current Distortion (THDi)	<3% (of nominal power)		
DC Current Injection	<0.5% In		
BATTERY			
Battery Type	Lithium-ion		
Battery Voltage Range	160-700V		
Max. Charging Current	37A+37A	50A+50A	
Max. Discharging Current	37A+37A	50A+50A	
Number of Battery Input	1	2	
Charging Strategy for Li-Ion Battery	Self-adaption to BMS		
EFFICIENCY			
Max. efficiency	97.6%		
Euro efficiency	97.0%		
MPPT efficiency	99.9%		
PROTECTION			
Anti-islanding Protection	Yes		
PV String Input Reverse Polarity Protection	Yes		
Insulation Resistor Detection	Yes		
Residual Current Monitoring Unit	Yes		
Output Over Current Protection	Yes		
Output Shorted Protection	Yes		
Surge Protection	Yes		
Arc Fault Circuit Interruption (AFCI optional)	Yes		
Over Voltage Category	DC Type II/AC Type III		
GENERAL DATA			
Operating Temperature Range	-25 °C ~ +60 °C	-40-60□, > 45°C Derating	
Cooling	Smart Cooling		
Noise (dB)	≤45 dB	≤65 dB	
Communication with BMS	CAN		
Monitoring mode	WIFI□APP		
Weight (kg)	30	82	
Size (WxHxD mm Excluding Connectors and Brackets)	408*638*237	527*894*294	
Ingress Protection	IP65		
Installation Style	Wall-mounted		
Warranty	5 Years (10 Years Optional)		
CERTIFICATION & STANDARDS			
IEC61727/62116, EN50549-1			
IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2			

*The technical specifications of this document are subject to change without any notice

AC-COUPLED ENERGY STORAGE INVERTER PH1600 PRO Series

4~6KW | Single Phase | 230VAC




The PH1600 PRO Series is designed for retrofitting PV systems, including power classes ranging from 4kw to 6kw. It can be installed with existing PV inverters, forming an AC coupling system. Capable of being grid-interactive, it allows users to store surplus power and sell it back to the grid when demand peaks and the price of electricity is at its highest. It runs reliably under even the most extreme conditions with metal aluminium housing with IP66 protection.




- LCD+LED – user friendly interface
- IP66 design for outdoor
- Compatible with other brands of inverter
- Various work mode for different application scenarios
- Natural cooling without external fan
- BMS Function
- Wifi monitoring
- UPS level switching time <10 ms
- Retrofit any on-grid systems to be able to run battery

Back panel description

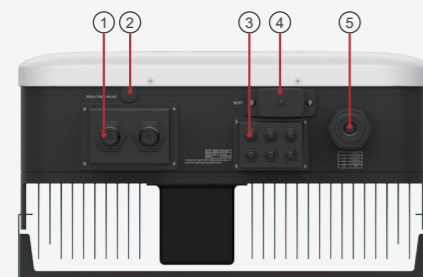

1. Battery input terminals and cover
2. Breather valve
3. BTS terminals, BMS terminals, load monitor terminals, dry contact terminals, CAN communication terminals, USB terminal and cover
4. Wi-Fi commodule
5. AC output terminals and cover

Solar system connection

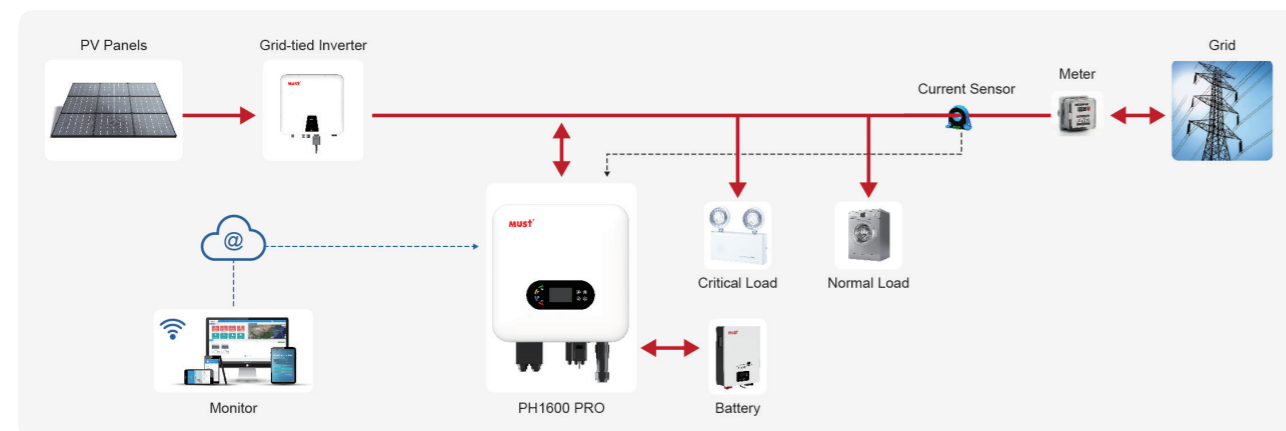

MODEL	PH16-4048 PRO	PH16-5048 PRO	PH16-6048 PRO
Rated AC output power	4000W	5000W	6000W
Nominal Battery System Voltage	48V		
INVERTER OUTPUT(AC)			
Nominal AC output power	4000W	5000W	6000W
Nominal output voltage range	220/230/240V;180-280V ±5VAC		
AC grid frequency range	50/60Hz; 45~55/55-65Hz		
Nominal output current	17.5A	21.7A	26A
Maximum output current	18.1A	22.7A	27.2A
Inrush current (spike/duration)	57.5A/5.2us		
Total harmonic distortion i(THDi) @Nominal Output	<3%		
Power factor at rated power	≈1		
Displacement power factor	Adjustable from 0.8 leading to 0.8 lagging		
Grid type	Single phase		
BATTERY MODE OUTPUT(AC)			
Output Rated Power	4000W	5000W	6000W
Nominal output voltage; accuracy range	230±1%		
Output ferequency; accuracy range	50/60Hz (optional)±0.2%		
Output rated current	17.5A	23A	26A
Output waveform	Pure sine wave		
Peak power	6000W/10S	7500W/10S	9000W/10S
Total harmonic distortion v (linear load)	<3%		
BATTERY & CHARGER			
Battery type	Lead-acid battery / Lithium battery		
Battery voltage	48V ±0.3		
Battery voltage range	40~60V ±0.3		
Charging curve	3-stage adaptive with maintenance		
Protection	Over-current protection / Over-temperature protection		
Maximum charging power	4000W	5000W	6000W
Maximum charging current	85A	105A	125A
EFFICIENCY			
Battery discharge (full load)	94.5%		
Maximum battery charging current efficiency	94.5%		
PROTECTION DEVICES			
Grid monitoring	Yes		
Output over current protection	Yes		
Output overvoltage protection-varistor	Yes		
Ground fault monitoring	Yes		
Integrated all-pole sensitive leakage current	Yes		
GENERAL			
Machine Dimension (W*H*D)(mm)	410*420*215		
Package Dimension (W*H*D)(mm)	/		
N.W(kg)	25		
G.W(kg)	/		
AC connection	Terminal Block		
Display	LED+LCD		
Communication interfaces	Wi-Fi/USB/GPRS/RS485/CAN		
Ingress protection rating	IP66		
Humidity	0~95% RH(No condensing)		
Operating temperature range	-20°C+60°C With derating above 45°C		
Cooling concept	Natural		
Noise figure [dB]	≤25		
Altitude	<3000m		
CERTIFICATION & STANDARDS			
CE-EMC+LVD (EN IEC61000-6-3: 2007, ENIEC61000-6-1:2017; EN IEC62477-1:2022)			

*The technical specifications of this document are subject to change without any notice

ON GRID SOLAR INVERTER PH5900 Series


3~6KW | Single Phase | 230VAC

PH5900 series PV inverters take full account of the needs of end customers, with excellent performance at the same time, use LED as inverter status display, effectively improve product life. Using DSP digital control, could afford wide grid voltage range, have a full range of protection features; to maximize the benefits at the same time, greatly enhance the reliability of the product.



- High Frequency On Grid Solar Inverter
- Rate power: 3-6KW
- MPPT efficiency up to 99.50%
- Multiple communications: WIFI etc
- Monitoring inverters freely via mobile phone APP
- Fanless low-noise design
- IP66 water-proof and dust-proof


Back panel description

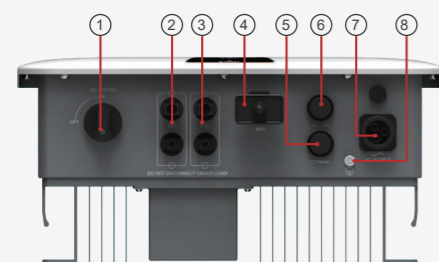

1. DC switch
2. PV1 input
3. PV2 input
4. WIFI connector
5. CT/Meter port
6. RS-485 connector
7. AC output
8. Ground

Solar system connection

Basic

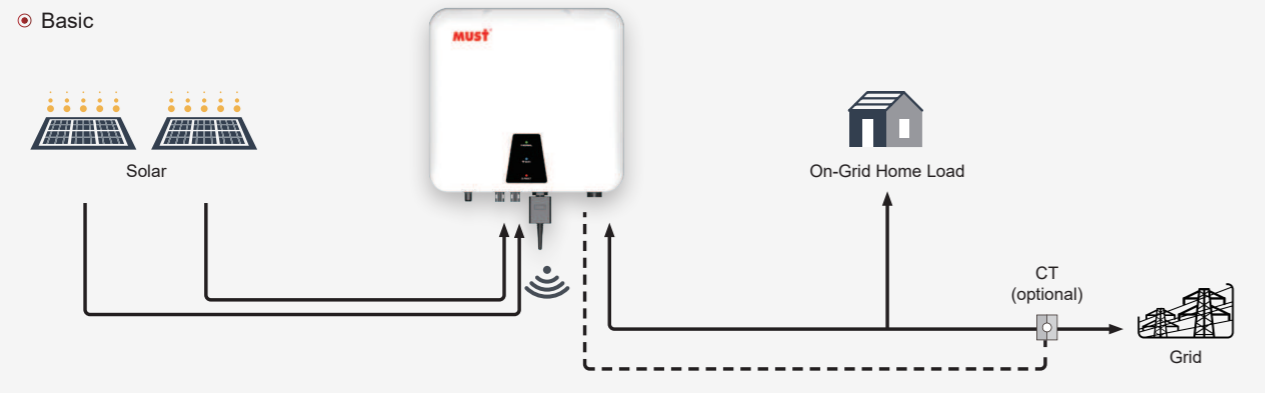

MODEL	PH59-3000M	PH59-3600M	PH59-4200M	PH59-4600M	PH59-5000M	PH59-6000M
Rated AC output power	3000W	3600W	4200W	4600W	5000W	6000W
PV INPUT(DC)						
Maximum recommended DC power	3600W	4320W	5040W	5520W	6000W	7200W
Nominal DC operating voltage	360V					
Maximum DC voltage	600V					
Start voltage	50V					
MPPT voltage range	40~550V					
Maximum input current	16A/16A					
No.of MPP tracker/ strings per MPP tracker	2/1					
DC connection	H4/MC4					
GRID OUTPUT(AC)						
Nominal AC output power	3000W	3600W	4200W	4600W	5000W	6000W
Max. AC output power	3300VA	3960VA	4620VA	5060VA	5500VA	6600VA
AC grid frequency	50/60Hz ±5Hz					
Maximum output current	14.3A	17.2A	20A	22A	23.9A	28.6A
AC nominal voltage	220V/230V					
AC voltage range	180-280V					
Total harmonic distortion (THDi)	<3%					
Rate power factor	1					
Power factor adjustable range	0.8 leading ~ 0.8 lagging					
AC grid connection type	L+N+PE					
EFFICIENCY						
Maximum efficiency	98.0%	98.0%	98.1%	98.1%	98.2%	98.2%
Euro-efficiency	96.8%	96.8%	97.0%	97.0%	97.2%	97.2%
MPPT efficiency	99.5%					
Self-Consumption night	<1W					
PROTECTION DEVICES						
Output over current protection	Yes					
Output AC overvoltage protection	Yes					
DC reverse polarity protection	Yes					
DC switch	Yes					
Ground fault monitoring	Yes					
Integrated all-pole sensitive leakage current monitoring unit	Yes					
PHYSICAL						
Machine Dimension (W*H*D)(mm)	402*378*195					
Package Dimension (W*H*D)(mm)	493*315*468					
N.W(kg)	15.5					
G.W(kg)	19.1					
INTERFACE						
DC connection	H4/MC4					
AC connection	Connector					
Display	LED					
Communication interfaces	WIFI/RS485/GPRS(opt)					
ENVIRONMENT						
Ingress protection rating	IP66					
Humidity	0-100%					
Operating temperature range	-25°C~ +60°C With derating above 45°C					
Cooling concept	Natural					
Noise emission(typical)[dB]	≤35dB(A)					
Self-consumption night	<1W					
Altitude	4000m					
OTHERS						
Topology	transformerless					
Warranty	Standard 5years/10 years(opt.)					
CERTIFICATION & STANDARDS						
CE-EMC+LVD(EN6100-6-3, 2007, EN6100-6-1:2017+EN IEC62109-1:2010, EN IEC62109-2:2011)						
IEC60529; EN50549-1:2019; RD1699, UNE206006:2011, UNE206007:2013						
Poland Type A (NC RfG:2016, PSE:2018, PTPIREE:2021)						
G98, G99						

*The technical specifications of this document are subject to change without any notice

ON GRID SOLAR INVERTER PH5900 TM Series


4~15KW | Three-phase | 380VAC

PH5900TM series PV inverters take full account of the needs of end customers, It is used to convert the DC generated by photovoltaic panels into AC and send it to the grid in a three-phase manner.with excellent performance at the same time, use LED as inverter status display, effectively improve product life. Using DSP digital control,could afford wide grid voltage range, have a full range of protection features; to maximize the benefits at the same time, greatly enhance the reliability of the product.




- Wide MPPT voltage range from 200V-1000V
- IP66 protection degree
- Integrated DC switch
- DSP controller
- The maximum efficiency is 98.4%
- Multi MPPT controller
- WIFI monitoring standard
- Easy installation

Back panel description

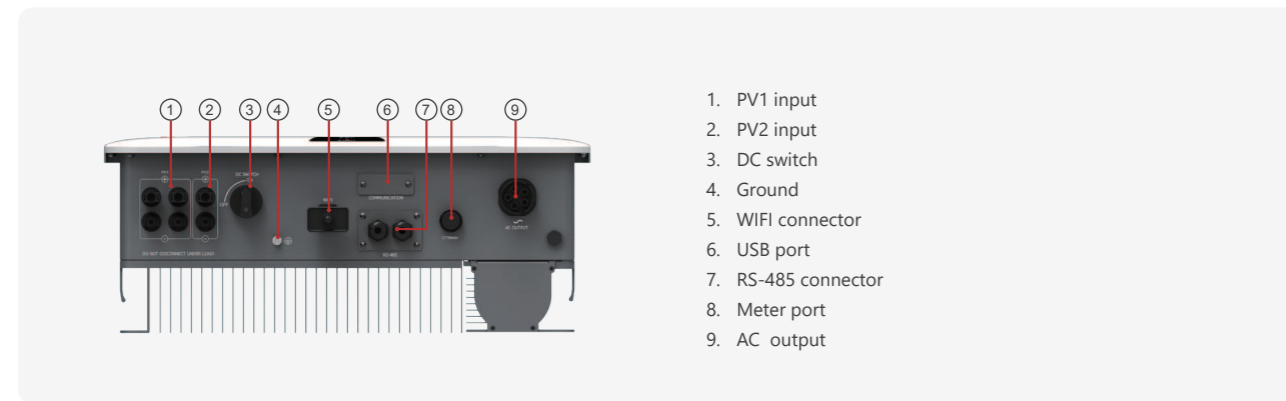

Solar system connection

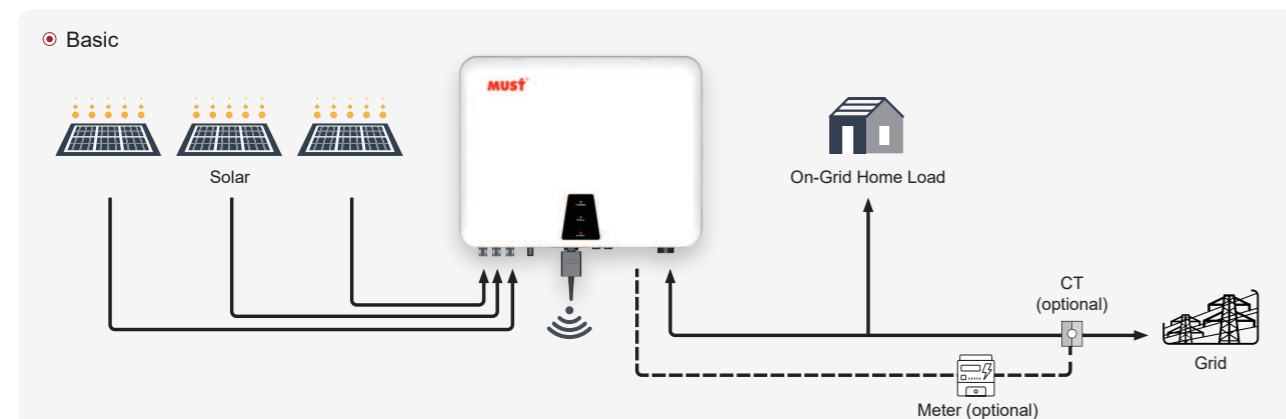

MODEL	PH59-4000 TM	PH59-5000 TM	PH59-6000 TM	PH59-7000 TM	PH59-8000 TM	PH59-9000 TM	PH59-10000 TM	PH59-11000 TM	PH59-12000 TM	PH59-13000 TM	PH59-15000 TM	
Rated AC output power	4000W	5000W	6000W	7000W	8000W	9000W	10000W	11000W	12000W	13000W	15000W	
OUTPUT (AC)												
Max.AC apparent power	4400VA	5500VA	6600VA	7700VA	8800VA	9900VA	11000VA	12100VA	13200VA	14300VA	16500VA	
Max.output current	6.4A	8A	9.6A	11.1A	12.7A	14.3A	15.9A	17.5A	19A	20.6A	23.8A	
Nominal AC Voltage	230V / 400V											
AC Voltage range	320-478V											
AC grid frequency range	50/60Hz ±5Hz											
Power factor at Rated power	1											
Adjustable displacement power factor	0.8leading...0.8lagging											
Total harmonic distortion (THDi)	< 3%											
AC grid connection type	3W+N+PE											
INPUT DATA												
Max.recommended PV power	4800W	6000W	7200W	8400W	9600W	10800W	12000W	13200W	14400W	15600W	18000W	
Max.DC voltage	1000V											
Start voltage	160V											
Nominal voltage	600V											
MPPT voltage range	200V-1000V											
Max.input current	12.5A/ 12.5A	12.5A/ 12.5A	12.5A/ 12.5A	12.5A/ 12.5A	12.5A/ 12.5A	12.5A/ 12.5A	12.5A/ 12.5A	12.5A/ 12.5A	21A/ 11A	21A/ 11A	21A/ 11A	
Number of independent MPP trackers / strings per MPP tracker	2/1	2/1	2/1	2/1	2/1	2/1	2/1	2/1	2/2+1	2/2+1	2/2+1	
DC connection	H4 / MC4											
EFFICIENCY												
Max.efficiency	98.4%											
Euro weighted efficiency	97.6%	97.6%	97.6%	98%	98%	98%	98%	98%	98%	98%	98%	
MPPT efficiency	99.5%											
Protection devices	Island protection, DC reverse polarity protection , Output over current protection, Output overvoltage protection-varistor, Integrated DC switch, Ground fault monitoring, Integrated all-pole sensitive leakage current monitoring unit											
GENERAL DATA FEATURES												
Machine Dimension (W*H*D)(mm)	540*426*219											
Package Dimension (W*H*D)(mm)	644*330*520											
N.W(kg)	21			23.2			24.8					
G.W(kg)	23.2			25.4			27					
Operation temperature range	-25°C- +60°C with derating above 45°C											
Noise emission(typical)	≤35dB(A)											
Altitude	3000m											
Self-consumption (night)	< 1W											
Topology	Transformerless											
Cooling concept	Natural											
Environmental protection Rating	IP66											
Relative humidity	0~100%											
FEATURES												
AC connection	Connector											
Display	LED											
Communication interfaces	USB/WIFI/RS485/GPRS(opt)											
Warranty	Standard 5 years / 10 years (opt.)											
CERTIFICATION & STANDARDS												
CE-EMC +LVD (EN6100-6-3:2007, EN6100-6-1:2017+EN IEC62109-1:2010, EN IEC62109-2:2011) IEC60529; EN50549-1:2019; UNE217001-2020; UNE217002-2020, NTS-631:2021 (Type A); G99												

*The technical specifications of this document are subject to change without any notice

ON GRID SOLAR INVERTER PH5900 TM Series


17~25KW | Three-phase | 380VAC

PH5900TM series PV inverters take full account of the needs of end customers, It is used to convert the DC generated by photovoltaic panels into AC and send it to the grid in a three-phase manner.with excellent performance at the same time, use LED as inverter status display, effectively improve product life. Using DSP digital control,could afford wide grid voltage range, have a full range of protection features; to maximize the benefits at the same time, greatly enhance the reliability of the product.



- Wide MPPT voltage range from 200V-1000V
- IP66 protection degree
- Integrated DC switch
- DSP controller
- The maximum efficiency is 98.6%
- Multi MPPT controller
- WIFI monitoring standard
- Easy installation


Back panel description

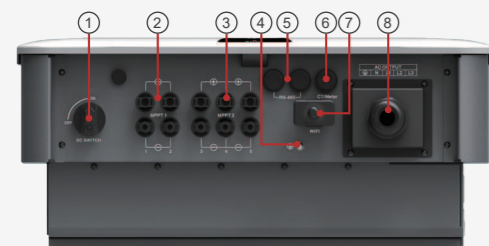

1. DC switch
2. MPPT1
3. MPPT2
4. Ground
5. RS-485 connector
6. CT/Meter port
7. WIFI connector
8. AC output

Solar system connection

Basic

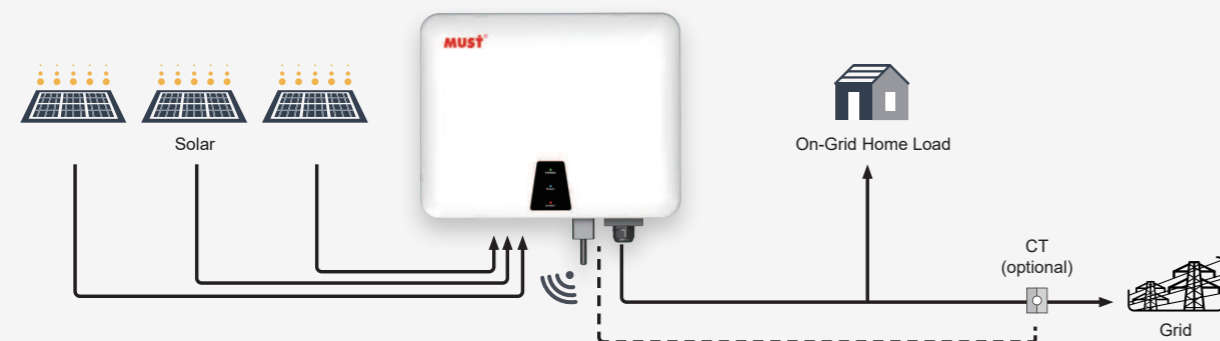

MODEL	PH59-17000 TM	PH59-18000 TM	PH59-19000 TM	PH59-20000 TM	PH59-21000 TM	PH59-22000 TM	PH59-23000 TM	PH59-24000 TM	PH59-25000 TM
Rated AC output power	17000W	18000W	19000W	20000W	21000W	22000W	23000W	24000W	25000W
OUTPUT (AC)									
Max.AC apparent power	18700VA	19800VA	20900VA	22000VA	23100VA	24200VA	25300VA	26400VA	27500VA
Max.output current	27.1A	28.6	30.2	31.8A	33.5A	35A	36.6A	38A	39A
Nominal AC Voltage	230V/400V								
AC Voltage range	320-478V								
AC grid frequency range	50/60±5Hz								
Power factor at Rated power	1								
Adjustable displacement power factor	0.8leading...0.8lagging								
Total harmonic distortion (THDi)	< 3%								
AC grid connection type	3W+N+PE								
INPUT DATA									
Max.recommended PV power	20400W	21600W	22800W	24000W	25200W	26400W	27600W	28800W	30000W
Max.DC voltage	1100V								
Start voltage	250V								
Nominal voltage	600V								
MPPT voltage range	200V-1000V								
Max.input current	26A/26A	26A/26A	26A/26A	26A/26A	26A/39A	26A/39A	26A/39A	26A/39A	26A/39A
Number of independent MPP trackers / strings per MPP tracker	2/2	2/2	2/2	2/2	2/2+3	2/2+3	2/2+3	2/2+3	2/2+3
DC connection	H4 / MC4								
EFFICIENCY									
Max. efficiency	98.3%				98.6%				
Euro weighted efficiency	98%	98%	98%	98%	98.3%	98.3%	98.3%	98.3%	98.3%
MPPT efficiency	99.5%								
Protection devices	Island protection, DC reverse polarity protection , Output over current protection, Output overvoltage protection-varistor, Integrated DC switch, Ground fault monitoring, Integrated all-pole sensitive leakage current monitoring unit, DC Surge protection, AC Surge protection								
GENERAL DATA FEATURES									
Machine Dimension (W*H*D)(mm)	540*426*234								
Package Dimension (W*H*D)(mm)	650*338*542								
N.W(kg)	28.6								
G.W(kg)	32.5								
Operation temperature range	-25°C- +60°C with derating above 45°C								
Noise emission(typical)	≤40dB(A)								
Altitude	3000m								
Self-consumption (night)	< 1W								
Topology	Transformerless								
Cooling concept	Fan cooling								
Environmental protection Rating	IP66								
Relative humidity	0~100%								
FEATURES									
AC connection	Connector								
Display	LED								
Communication interfaces	WIFI/RS485/GPRS(opt)								
Warranty	Standard 5 years / 10 years (opt.)								
CERTIFICATION & STANDARDS									
CE-EMC+LVD (EN6100-6-3:2007, EN6100-6-1:2017+EN IEC62109-1:2010, EN IEC62109-2:2011) IEC60529; EN50549-1:2019; UNE217001-2020; UNE217002-2020, NTS-631:2021 (Type A); G99									

*The technical specifications of this document are subject to change without any notice

ON/OFF HYBRID SOLAR INVERTER PH1800 PRO Series


8~10KW | 380VAC

This is a multi-function inverter/charger, combining functions of inverter, solar charger and battery charger to offer uninterruptible power support with portable size. Its comprehensive LCD display offers user-configurable and easy-accessible button operation such as battery charging current, AC/solar charger priority, and acceptable input voltage based on different applications.




- Pure sine wave inverter
- Configurable input voltage range for home appliances and personal computers via LCD setting
- Configurable battery charging current based on applications via LCD setting
- Configurable AC/Solar Charger priority via LCD setting
- Compatible to mains voltage or generator power
- Auto restart while AC is recovering
- Overload/ Over temperature/ short circuit protection
- CAN/RS485 communication for BMS
- Cold start function
- WiFi remote monitoring (optional)

Back panel description

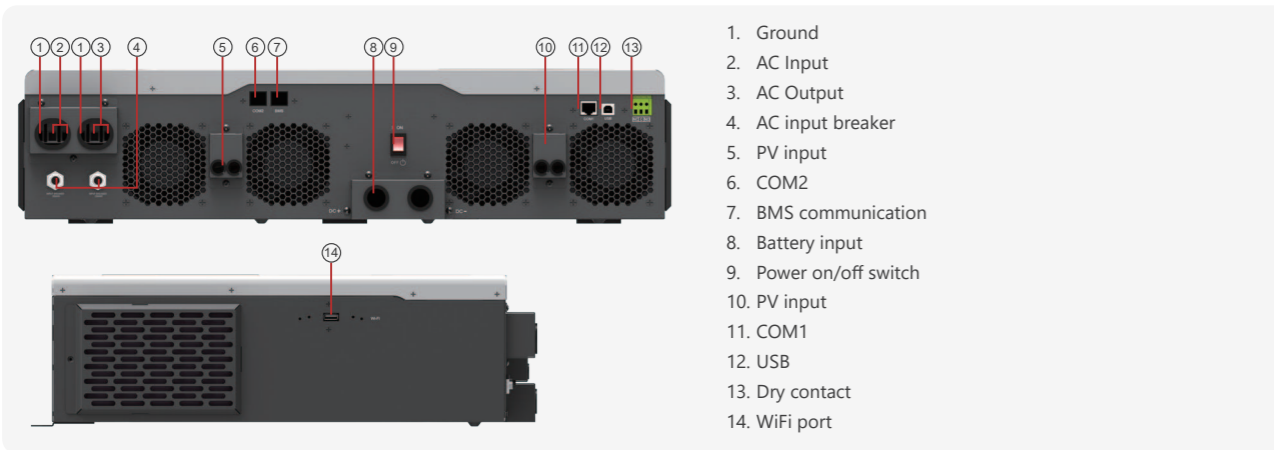

Solar system connection

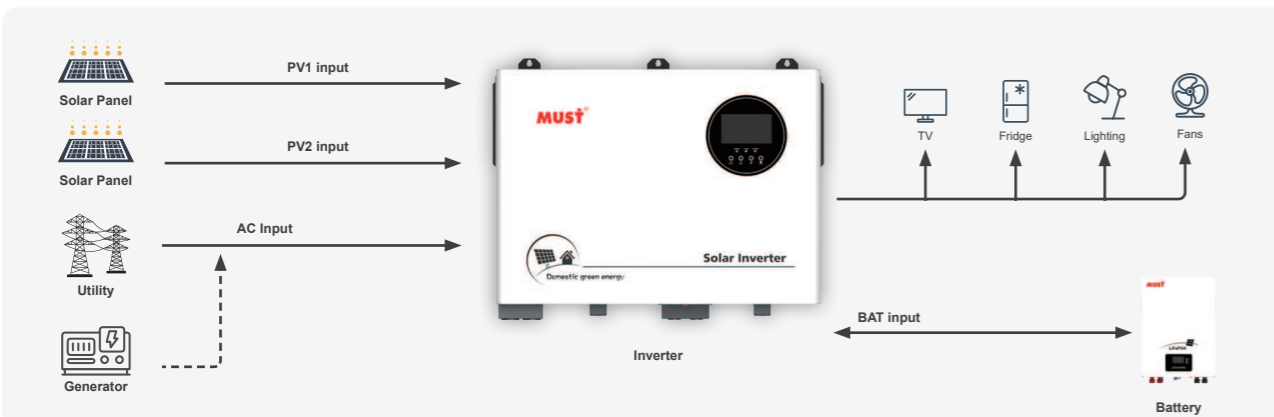

MODEL	PH18-8048 PRO	PH18-10048 PRO
Nominal Battery System Voltage	48VDC	
INVERTER OUTPUT		
Rated Power	8000W	10000W
Surge Power	16000W	20000W
Waveform	Pure Sine Wave	
AC Voltage Regulation (Batt.Mode)	230VAC±5%	
Output Frequency	60Hz or 50Hz	
Inverter Efficiency(Peak)	90%	
Transfer Time	10ms (UPS) 20ms (APL)	
AC INPUT		
Nominal Input Voltage	230VAC	
Max AC Input Voltage	300VAC	
Selectable Voltage Range	170~280VAC (UPS) / 90~280VAC (APL) / 184~253VAC(VDE4105)	
Frequency Range	50Hz / 60Hz(Auto detection)	
BATTERY		
Normal Voltage	48VDC	
SOLAR CHARGER & AC CHARGER		
AC Charging Current	2-120A	2-160A
Maximum PV Array Open Circuit Voltage	450VDC	
PV Array Open Circuit Voltage	150-430VDC	
Cold Start Voltage	46VDC	
Solar Charging Current	80A/80A	100A/100A
Default Charging Current	80A/80A	
Maximum Charge Current	160A	200A
Charging Algorithm	3-step (Flooded Battery / AGM / GEL/ LEAD Battery), 4-step(LI)	
GENERAL DATA FEATURES		
Operating Temperature	-10°C~50°C	
Storage Temperature	-15°C ~60°C	
Machine Dimension (W*H*D)(mm)	600*503*141.2	
Package Dimension (W*H*D)(mm)	/	
N.W(kg)	21	
G.W(kg)	/	
Warranty	2 year	

CERTIFICATION & STANDARDS

EN IEC62368-1
 CE-LVD (EN IEC62109-1, EN IEC62109-2)
 Rohs-(2011/65/EUand2015/863/EU)
 CE-LVD (BS IEC62109-1:2010, BS EN IEC62109-2:2011)
 UKCA

*The technical specifications of this document are subject to change without any notice

ON/OFF GRID HYBRID SOLAR INVERTER PH1800 PRO Series


3~5.2KW | 450V | WiFi

PH1800 PRO is a multi-function inverter/charger, combining functions of inverter, MPPT solar charger and battery charger to offer uninterruptible power support in portable size. PH1800 PRO Series can run without battery. The Maximum PV array open circuit voltage can reach 450V and MPPT voltage is 150~430V, which can help customers make full use of solar energy.




- Pure sine wave output
- Smart LCD setting (Working modes, Charge Current, Charge Voltage, etc).
- Built-in MPPT solar charge controller
- MAX PV Array Open Circuit Voltage: 450V
- Combining solar system, AC utility, and battery power source to supply continuous power
- Overload, short circuit and Deep discharge protection
- Cold start function
- Support USB, RS485 monitoring function
- Parallel operation with up to 3 units
- WIFI remote monitoring (optional)

Back panel description

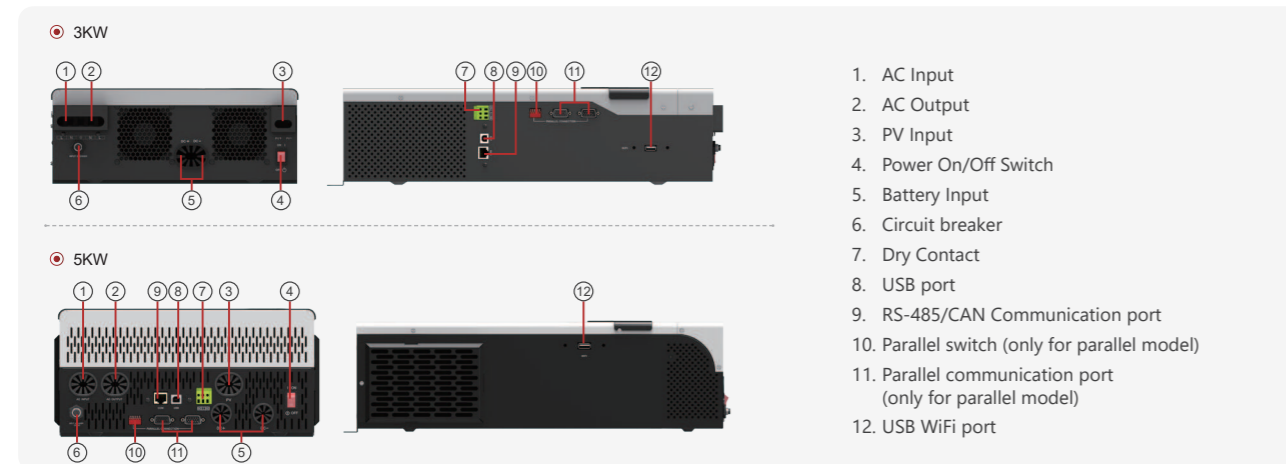

Solar system connection

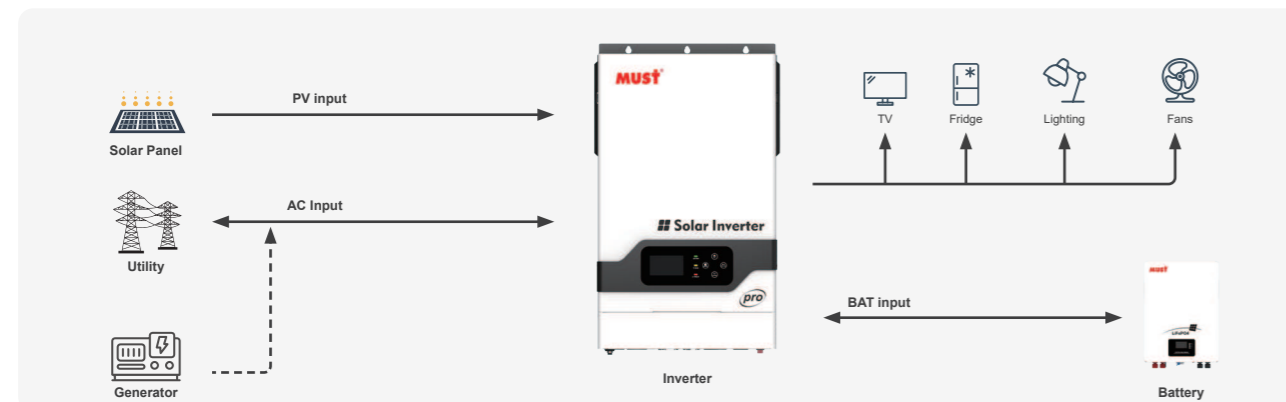

MODEL	PH18-3024 PRO	PH18-5248 PRO		
Nominal Battery System Voltage	24VDC	48VDC		
INVERTER OUTPUT				
Rated Power	3000VA / 3000W	5200VA / 5200W		
Surge Power	6000W	10400W		
Waveform	Pure sine wave			
AC Voltage Regulation (Batt.Mode)	230VAC±5%(Setting)			
Inverter Efficiency(Peak)	90%			
Transfer Time	10ms (UPS / VDE4105) / 20ms (APL)			
AC INPUT				
Voltage	230VAC±5%			
Selectable Voltage Range	170~280VAC(UPS) / 90~280VAC(APL) / 184~253VAC(VED4105)			
Frequency Range	50Hz / 60Hz(Auto sensing)			
BATTERY				
Normal voltage	24VDC	48VDC		
Floating Charge Voltage	27.4VDC	54.8VDC		
Overcharge Protection	30VDC	60VDC		
SOLAR CHARGER & AC CHARGER				
Maximum PV Array Open Circuit Voltage	450VDC			
Maximum PV input voltage	18A	18A	27A	
Charging Algorithm	3-Step (Flooded Battery, AGM / GEL / LEAD Battery), 4-Step (Li)			
Maximum PV Array Power	4000W	5000W	6000W	
PV Array MPPT Voltage Range	150~430 VDC			
Maximum Solar Charge Current	80A	100A	80A	100A
Maximum AC Charge Current	60A	80A	60A	80A
Maximum Charge Current	80A	100A	80A	100A
MECHANICAL SPECIFICATIONS				
Machine Dimension (W*H*D)(mm)	322*486*134		309*505*147	
Package Dimension (W*H*D)(mm)	575*229*425		603*260*400	
N.W(kg)	10.6		12.9	
G.W(kg)	12		13.8	
OTHER				
Humidity	5% to 95% Relative humidity (Non-condensing)			
Operating Temperature	0°C~50°C			
Storage Temperature	-15°C~60°C			
Warranty	2 year			
CERTIFICATION & STANDARDS				
CE-EMC+LVD (EN6100-6-3:2007, EN6100-6-1:2017+EN IEC62109-1:2010, EN IEC62109-2:2011) EN IEC62368-1:2020+A11:2020 EN IEC62368-1:2018 Rohs-(2011/65/EUand2015/863/EU)				

*The technical specifications of this document are subject to change without any notice

ON/OFF GRID HYBRID SOLAR INVERTER PH1900 EXP Series




4~6KW | 500V | WiFi | Dual output

PH1900 EXP is a multi-function inverter/charger, combining functions of inverter, MPPT solar charger and battery charger to offer uninterruptible power support in portable size. PH1900 EXP Series can run without battery. The Maximum PV array open circuit voltage can reach 500V and MPPT voltage is 90~430V, which can help customers make full use of solar energy.




- Pure sine wave output
- Smart LCD setting (Working modes, Charge Current, Charge Voltage, etc).
- Built-in MPPT solar charge controller
- MAX PV Array Open Circuit Voltage: 500V
- Combining solar system, AC utility, and battery power source to supply continuous power
- Overload, short circuit and Deep discharge protection
- Cold start function
- Support USB, RS485 monitoring function
- Parallel operation with up to 3 units
- WIFI remote monitoring (optional)
- With BMS lithium battery communication function
- With AC/PV lithium battery activation function
- Dual outputs for smart load management

Back panel description

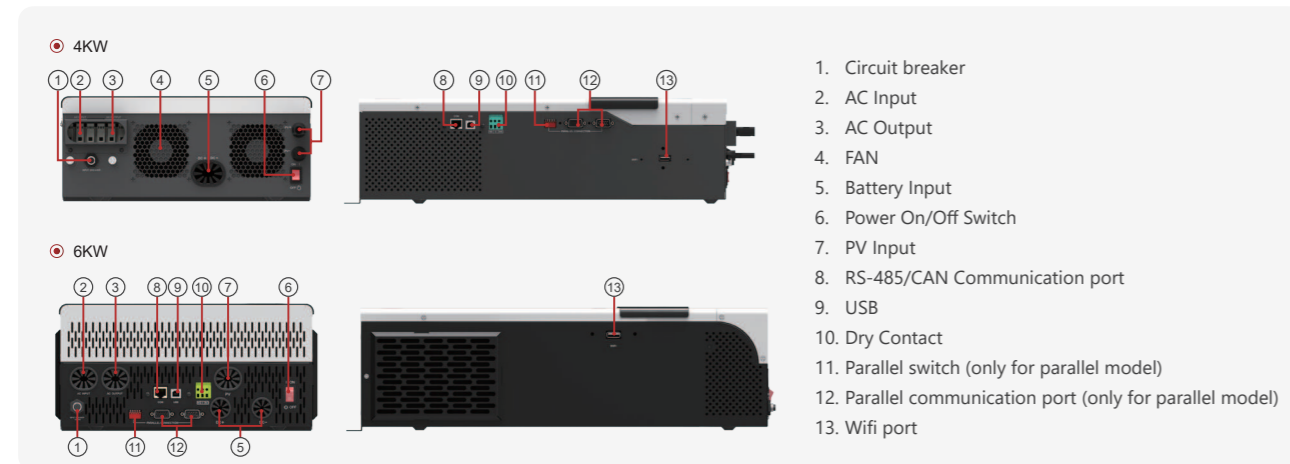

Solar system connection

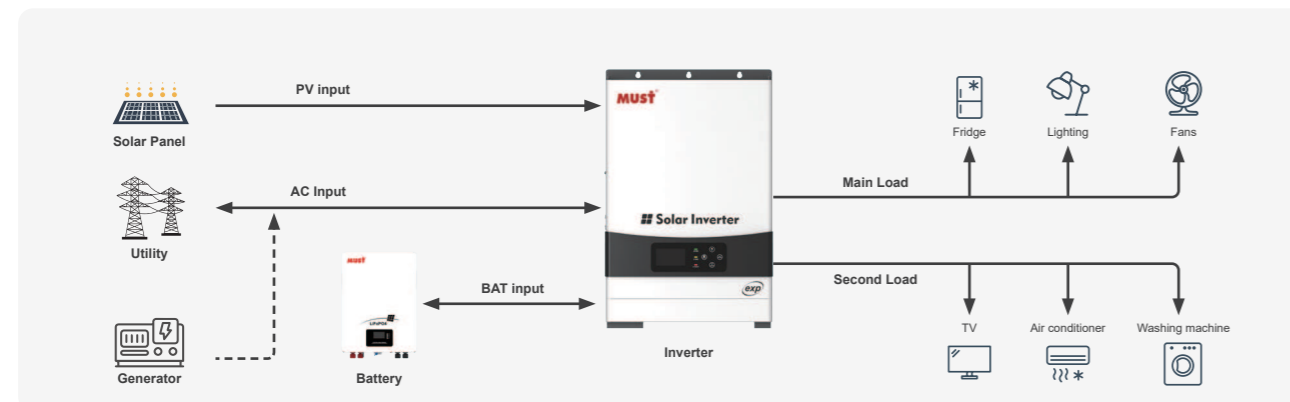

MODEL	PH19-4024 EXP	PH19-6048 EXP
Nominal Battery System Voltage	24VDC	48VDC
INVERTER OUTPUT		
Rated Power	4000VA/4000W	6000VA/6000W
Surge Power	8000W	12000W
Waveform	Pure sine wave	
AC Voltage Regulation (Batt.Mode)	230VAC±5%(Setting)	
Inverter Efficiency(Peak)	90%	
Transfer Time	10ms (UPS / VDE4105) / 20ms (APL)	
AC INPUT		
Voltage	230VAC±5%	
Selectable Voltage Range	170~280VAC(UPS) / 90~280VAC(APL) / 184~253VAC(VED4105)	
Frequency Range	50Hz / 60Hz(Auto sensing)	
BATTERY		
Normal voltage	24VDC	48VDC
Floating Charge Voltage	27.4VDC	54.8VDC
Overcharge Protection	30VDC	60VDC
SOLAR CHARGER & AC CHARGER		
Maximum PV Array Open Circuit Voltage	500VDC	
Maximum PV input Current	18A	27A
Charging Algorithm	3-Step (Flooded Battery, AGM / GEL / LEAD Battery), 4-Step (Li)	
Maximum PV Array Power	5000W	6000W
PV Array MPPT Voltage Range	90~430 VDC	120~430 VDC
Maximum Solar Charge Current	100A	120A
Maximum AC Charge Current	80A	100A
Maximum Charge Current	100A	120A
MECHANICAL SPECIFICATIONS		
Machine Dimension (W*H*D)(mm)	322*486*134	309*505*147
Package Dimension (W*H*D)(mm)	600*230*420	603*260*400
N.W(kg)	10.6	12.9
G.W(kg)	12	13.8
OTHER		
Humidity	5% to 95% Relative humidity (Non-condensing)	
Operating Temperature	0°C~50°C	
Storage Temperature	-15°C ~60°C	
CERTIFICATION & STANDARDS		
CE-EMC+LVD (EN6100-6-3:2007, EN6100-6-1:2017+EN IEC62109-1:2010, EN IEC62109-2:2011) EN IEC62368-1:2020+A11:2020 EN IEC62368-1:2018 Rohs-(2011/65/EUand2015/863/EU)		

*The technical specifications of this document are subject to change without any notice

ON/OFF GRID HYBRID SOLAR INVERTER PH1900 EXP Series

6.2~12KW | PV500V | 120A~150A | Dual output




PH1900 EXP is a multi-function inverter/charger, combining functions of inverter, MPPT solar charger and battery charger to offer uninterruptible power support in portable size. PH1900 EXP Series can run without battery. The Maximum PV input voltage can reach 500V and MPPT voltage range is 90~450Vdc, built-in two MPPTs solar charge controller, which can help customers make full use of solar energy.




- Dual output for smart load management
- Smart color LCD setting (Working modes, Charge Current, Charge Voltage, etc).
- Built-in Two MPPTs solar charge controller
- Wide MPPT voltage range is 90~450V, the maximum PV input voltage can reach 500V (450V for parallel)
- Can provide the power to the load without battery
- Combining solar system, AC utility, and battery power source to supply continuous power
- Overload, short circuit and Deep discharge protection
- With BMS lithium battery communication function
- With AC/PV lithium battery activation function
- Support USB, RS485 monitoring function
- Parallel operation up to 6 units
- WIFI remote monitoring

Back panel description

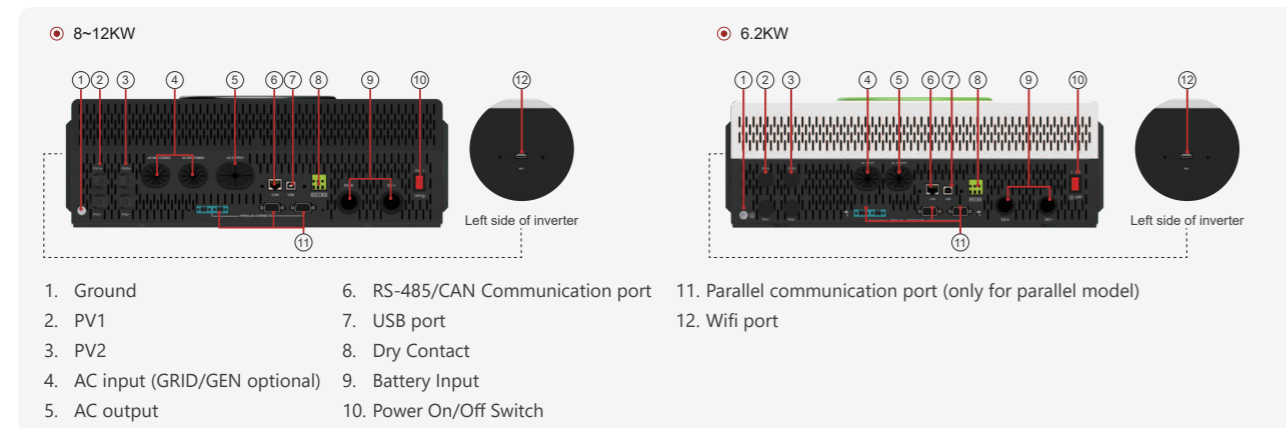

Solar system connection

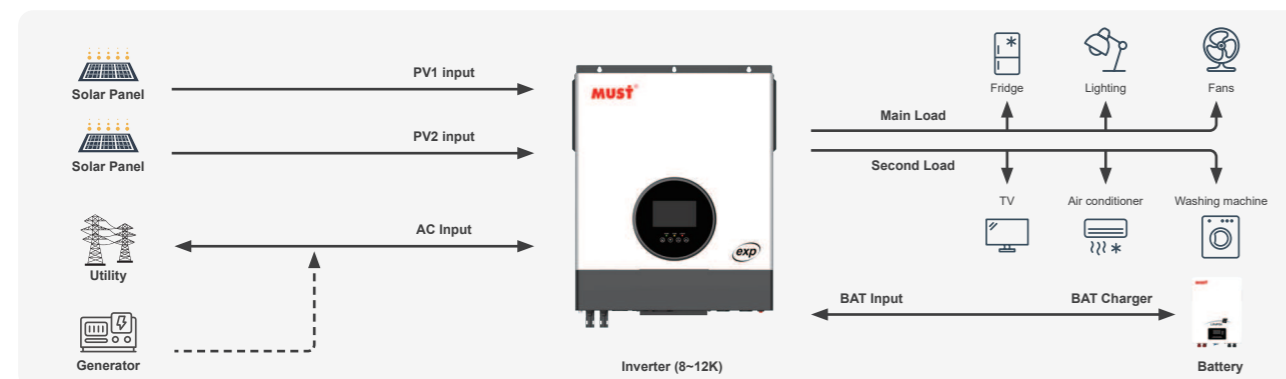

MODEL	PH19-6248 EXP	PH19-8048 EXP	PH19-10048 EXP	PH19-11048 EXP	PH19-12048 EXP
Default Battery System Voltage	48VDC				
INVERTER OUTPUT					
Rated Power	6200VA/6200W	8000VA/8000W	10000VA/10000W	11000VA/11000W	12000VA/12000W
Surge Power	12400W	16000W	20000W	22000W	24000W
Waveform	Pure Sine Wave				
AC Voltage Regulation (Batt.Mode)	230VAC±5%(Setting)				
Inverter Efficiency(Peak)	92%				
Transfer Time	10ms(UPS / VDE4105) / 20ms(APL)				
AC INPUT					
Voltage	230VAC				
Max AC Input Voltage	300VAC				
Selectable Voltage Range	170~280VAC(UPS) / 90~280VAC(APL) / 184~253VAC(VDE)				
Frequency Range	50Hz / 60Hz (Auto sensing)				
BATTERY					
Normal voltage	48VDC				
Floating Charge Voltage	54.8VDC				
Overcharge Protection	60VDC				
SOLAR CHARGER & AC CHARGER					
Maximum PV Array Open Circuit Voltage	500VDC (450V for parallel)				
Charging Algorithm	3-Step (Flooded Battery, AGM / GEL / LEAD Battery), 4-Step (Li)				
Maximum PV Array Power	4000W*2	4000W*2	5000W*2	6000W*2	6000W*2
Maximum PV Input Current	18A*2	18A*2	27A*2(40A max)	27A*2(40A max)	27A*2(40A max)
PV Array MPPT Voltage Range	90~450VDC (90~430VDC for parallel)				
Min Battery Voltage For PV charge	34VDC				
Maximum Solar Charge Current	120A	120A	150A	150A	150A
Maximum AC Charge Current	100A	120A	150A	150A	150A
Maximum Charge Current	120A	120A	150A	150A	150A
MECHANICAL SPECIFICATIONS					
Machine Dimension (W*H*D)	425*473*145mm		425*527*145mm		
Package Dimension (W*H*D)	/				
N.W (kg)	/	17.4	17.4	/	17.6
G.W (kg)	/	/	/	/	/
OTHER					
Humidity	5% to 95% Relativ Humidity (Non-condensing)				
Operating Temperature Range	0°C~50°C				
Storage Temperature Range	-15°C~60°C				
Warranty	2 year				
CERTIFICATION & STANDARDS					
CE					

*The technical specifications of this document are subject to change without any notice

ON/OFF GRID HYBRID SOLAR INVERTER PH3000 Series

10~12KW | Three-phase | 380VAC | Low Frequency


This model PH3000 Three-phase is a flexible and intelligent energy storage inverter which utilizes solar power, utility power, and battery power source to supply continuous power. This is a multi-functional hybrid inverter which can power all kinds of appliances in home or office environment, including motor-type appliances such as tube light, fan, refrigerator and air conditioner. The system generates electricity when it has sufficient sunshine, supplying power to your home and feeding any surplus power back to the Grid.




- Rated power 10KW to 12KW
- Smart LCD setting(Working modes, Charge Current, Charge Voltage, etc.)
- Built-in MPPT 180A solar charge controller
- MPPT Efficiency max 98%
- Combining solar system, AC utility, and battery power source to supply continuous power
- Multiple operations: basic Grid-tie, Off-Grid, Grid-Interactive
- Support CAN, RS485 monitoring function



Back panel description

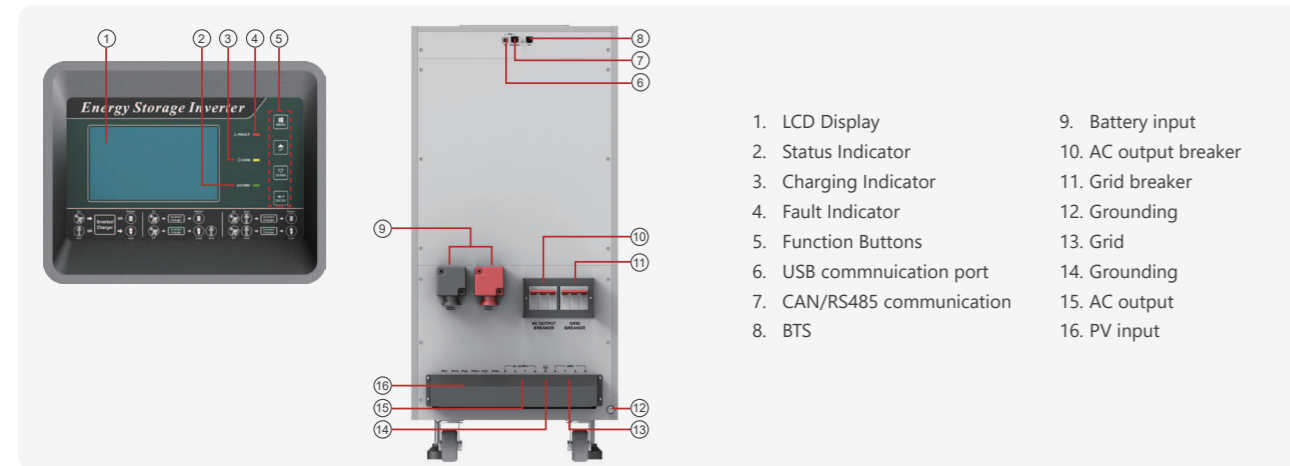

Solar system connection

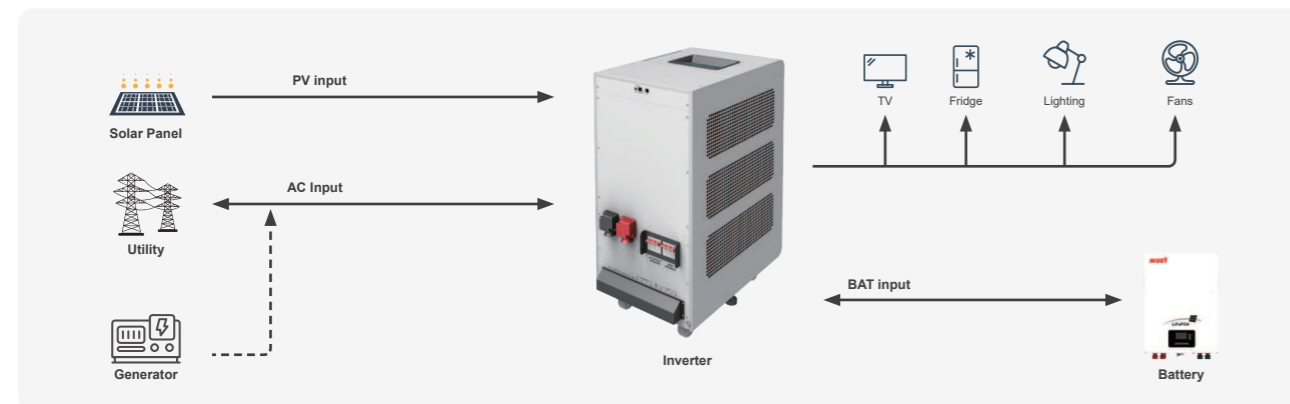

MODEL	PH30-10048-T	PH30-12048-T
Nominal Battery System Voltage	48VDC	
INVERTER OUTPUT		
Rated output power	10000W	12000W
Output wave	Pure sine wave	
Nominal output voltage	230 VAC (P-N) / 400 VAC (P-P)	
Nominal output current	14.3A per phase	17.4A per phase
Nominal output frequency	50 Hz / 60 Hz	
Rate of wave distortion(THD)(Linearity loads)	Off grid≤2%; Grid discharge ≤3%; Grid charge ≤3%	
Peak efficiency	≥93%	
Overload capability	100% <load ≤ 110%, 30 minutes; 110% <load ≤ 125%, 1 minutes; 125% <load ≤ 150%, 30 seconds; load < 150%, 10 seconds; Short circuit, 5 seconds	
AC INPUT		
AC input maximum current	26.0A per phase	34.8A per phase
Nominal frequency	50Hz / 60Hz	
Acceptable input voltage range	Defaults 186Vac ~253Vac per phase; Narrow 174Vac ~272Vac per phase; Wide 95Vac ~272Vac per phase	
BATTERY		
Type of Battery	Lithium battery or lead-acid battery	
Nominal Voltage	48VDC	
Low Voltage Protection Point	Charger 34.0VDC; Inverter 40.0VDC	
Absorption Voltage	50.0VDC	
Refloat Voltage	54.8VDC	
Float Voltage	57.2VDC	
SOLAR CHARGER & AC CHARGER		
PV Open Circuit Voltage	145VDC	
Max Solar Charging Current	60A per channel	
Max AC Charging Current	60A per phase	80A per phase
Max Charging Current	120A per phase	140A per phase
MECHANICAL SPECIFICATIONS		
Mounting	Floor installation	
Machine Dimension (W*H*D)(mm)	392*828*629	
Package Dimension (W*H*D)(mm)	513*1031*700	
N.W(kg)	128	140
G.W(kg)	133	160
OTHER		
Communication terminal	RS485 / CAN bus	
Operating Temperature Range	0°C ~ +50°C	
Environmental Protection Rating	IP20	
Ambient humidity	0 -- 90% relative humidity (non-condensing)	
Altitude	≤2000m	
CERTIFICATION & STANDARDS		
EN IEC62368-1 CE-LVD (EN IEC62109-1, EN IEC62109-2) Rohs-(2011/65/EU and 2015/863/EU) CE-LVD (BS IEC62109-1:2010, BS EN IEC62109-2:2011) UKCA		

*The technical specifications of this document are subject to change without any notice

PURE SINE WAVE INVERTER PI1500 Series


300~2000W | 12V,24V | 230V

PI1500 series is a pure sine wave inverter, high frequency machine solution, the product is small size, the solution is reliable and stable, the main function is to invert the DC 12VDC battery or 24VDC battery to AC 230VAC output, mainly used for emergency use Electricity, car inverter, outdoor electricity and other occasions.



- Input Voltage 12V / 24V DC optional
- Output Voltage 230V AC optional
- Portable power for AC products, AC outlets for connecting multiple loads
- High efficiency converts virtually all of the battery's power to AC
- Mounting brackets for convenient installation
- Overload and over temperature shut down
- Low voltage and over voltage alarm/cut off
- Short circuit protection

Solar system connection

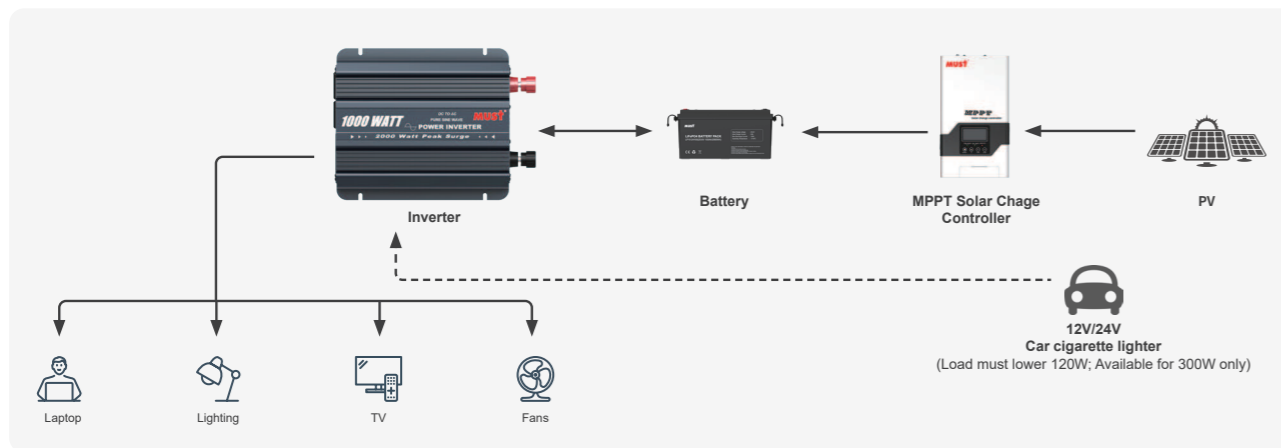

Type



MODEL	PI15-0312	PI15-0324	PI15-0612	PI15-0624	PI15-1012	PI15-1024	PI15-1512	PI15-1524	PI15-2012	PI15-2024
BATTERY DC INPUT										
Input Voltage	12VDC	24VDC	12VDC	24VDC	12VDC	24VDC	12VDC	24VDC	12VDC	24VDC
Low Voltage Protect Delay	2 seconds									
Low Voltage Warning	(PB)	10.5VDC	21.0VDC	10.5VDC	21.0VDC	10.5VDC	21.0VDC	10.5VDC	21.0VDC	10.5VDC
	(LI)	10.5VDC	21.0VDC	11.6VDC	23.2VDC	11.6VDC	23.2VDC	11.6VDC	23.2VDC	11.6VDC
Low Voltage Protect	(PB)	11.5VDC	23.0VDC	11.5VDC	23.0VDC	11.5VDC	23.0VDC	11.5VDC	23.0VDC	11.5VDC
	(LI)	11.5VDC	23.0VDC	12.0VDC	24.0VDC	12.0VDC	24.0VDC	12.0VDC	24.0VDC	12.0VDC
Low Voltage Restoring	(PB)	12.5VDC	25.0VDC	12.5VDC	25.0VDC	12.5VDC	25.0VDC	12.5VDC	23.0VDC	12.5VDC
	(LI)	12.5VDC	25.0VDC	12.8VDC	25.6VDC	12.8VDC	25.6VDC	12.8VDC	25.6VDC	12.8VDC
Over Voltage Protect	(PB)	14.7VDC	29.4VDC	14.7VDC	29.4VDC	14.7VDC	29.4VDC	14.7VDC	29.4VDC	14.7VDC
	(LI)	14.7VDC	29.4VDC	14.5VDC	29.0VDC	14.5VDC	29.0VDC	14.5VDC	29.0VDC	14.5VDC
Over Voltage Restoring	(PB)	15.0VDC	30.0VDC	15.0VDC	30.0VDC	15.0VDC	30.0VDC	15.0VDC	30.0VDC	15.0VDC
	(LI)	15.0VDC	30.0VDC	14.8VDC	29.6VDC	14.8VDC	29.6VDC	14.8VDC	29.6VDC	14.8VDC

Parameters: (PB) Lead-acid Battery / (LI) 4 series (12V), 8 series (24V) LiFePO4 Lithium Battery Pack

INVERTER AC OUTPUT					
Default Power	300W	600W	1000W	1500W	2000W
Peak Power	600W	1200W	2000W	3000W	4000W
Output AC Voltage	230V	230V	230V	230V	230V
Output AC Frequency	50Hz	50Hz	50Hz	50Hz	50Hz
Output Wave	Pure Sine Wave				
Output Wave THD	< 3%				

PROTECTION	
Battery Input Protection	Low Voltage Protection, Over Voltage Protection, Reverse Protection
Inverter Output Protection	Output Overload, Short-Circuit, Over Temperature Protection

DISPLAY	
LED Display	Red: Error ; Green: System OK
LED Digital Display	/ Display Battery Voltage, Output Power, Output Voltage, Error Numbers

DC OUTPUT	
USB	USB-A type (5V1A)

EFFICIENCY								
Peak Conversion efficiency	91%	91%	90%	88%	90%	88%	90%	

ENVIRONMENT										
Protection Degree	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20
Working Environment	Indoor Fan cooling									
Environmental temperature	0~45°C									
Ambient humidity	20%~90%, No condensation									
Altitude	≤3000m									

DIMENSIONS				
Machine Dimension (W*H*D)(mm)	205*125*61	242*158*81	291*220*83	380.8*248*90
Package Dimension (W*H*D)(mm)	228*102*176	268*140*205	330*147*267	420*150*300
N.W(kg)	1	1.7	2.6	4.5
G.W(kg)	9.3 (8pcs)	15 (8pcs)	23 (8pcs)	19 (4pcs)

CERTIFICATION & STANDARDS	
CE-EMC+LVD	(EN6100-6-3, EN6100-6-1+EN IEC62109-1, EN IEC62109-2)
CE-LVD	(EN 62477-1/A11)

*The technical specifications of this document are subject to change without any notice

PURE SINE WAVE INVERTER PI1500 Series


600~2000W | 12V,24V | 230V

PI1500 series is a pure sine wave inverter, high frequency machine solution, the product is small size, the solution is reliable and stable, the main function is to invert the DC 12VDC battery or 24VDC battery to AC 230VAC output, mainly used for emergency use Electricity, car inverter, outdoor electricity and other occasions.



- Input Voltage 12V / 24V DC optional
- Output Voltage 230V AC optional
- Portable power for AC products, AC outlets for connecting multiple loads
- High efficiency converts virtually all of the battery's power to AC
- Mounting brackets for convenient installation
- Overload and over temperature shut down
- Low voltage and over voltage alarm/cut off
- Short circuit protection

Solar system connection

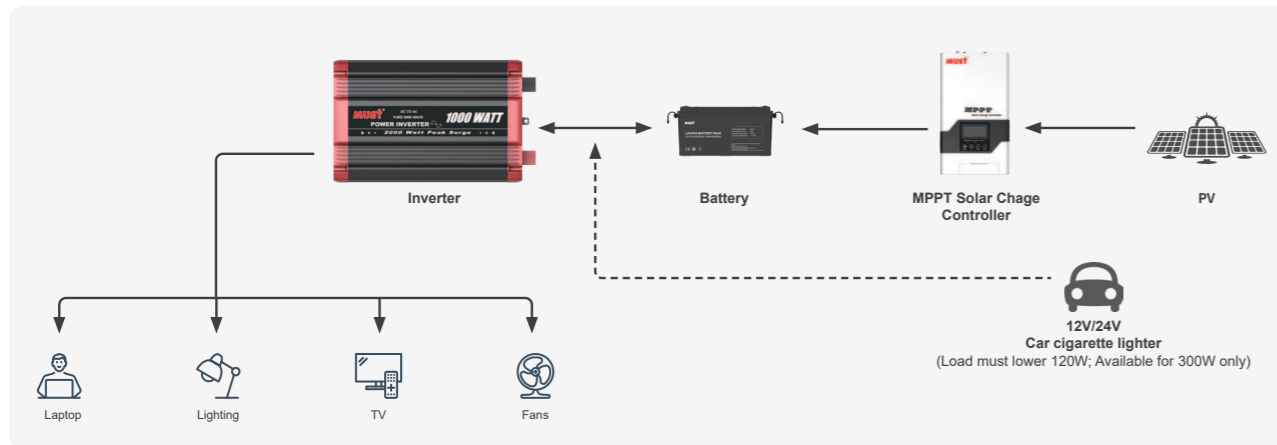

Type



MODEL	PI15-0612	PI15-0624	PI15-1012	PI15-1024	PI15-1512	PI15-1524	PI15-2012	PI15-2024
BATTERY DC INPUT								
Input Voltage	12VDC	24VDC	12VDC	24VDC	12VDC	24VDC	12VDC	24VDC
Low Voltage Protect Delay	2 seconds							
Low Voltage Warning	(PB)	11.5VDC	23.0VDC	11.5VDC	23.0VDC	11.5VDC	23.0VDC	23.0VDC
	(LI)	12.0VDC	24.0VDC	12.0VDC	24.0VDC	12.0VDC	24.0VDC	24.0VDC
Low Voltage Protect	(PB)	10.5VDC	21.0VDC	10.5VDC	21.0VDC	10.5VDC	21.0VDC	21.0VDC
	(LI)	11.6VDC	23.2VDC	11.6VDC	23.2VDC	11.6VDC	23.2VDC	23.2VDC
Low Voltage Restoring	(PB)	12.5VDC	25.0VDC	12.5VDC	25.0VDC	12.5VDC	23.0VDC	23.0VDC
	(LI)	12.8VDC	25.6VDC	12.8VDC	25.6VDC	12.8VDC	25.6VDC	25.6VDC
Over Voltage Protect	(PB)	15.0VDC	30.0VDC	15.0VDC	30.0VDC	15.0VDC	30.0VDC	30.0VDC
	(LI)	14.8VDC	29.6VDC	14.8VDC	29.6VDC	14.8VDC	29.6VDC	29.6VDC
Over Voltage Restoring	(PB)	14.7VDC	29.4VDC	14.7VDC	29.4VDC	14.7VDC	29.4VDC	29.4VDC
	(LI)	14.5VDC	29.0VDC	14.5VDC	29.0VDC	14.5VDC	29.0VDC	29.0VDC

Parameters: (PB) Lead-acid Battery / (LI) 4 series (12V), 8 series (24V) LiFePO4 Lithium Battery Pack

INVERTER AC OUTPUT				
Default Power	600W	1000W	1500W	2000W
Peak Power	1200W	2000W	3000W	4000W
Output AC Voltage	230V			
Output AC Frequency	50Hz			
Output Wave	Pure Sine Wave			
Output Wave THD	< 3%			

PROTECTION	
Battery Input Protection	Low Voltage Protection, Over Voltage Protection, Reverse Protection
Inverter Output Protection	Output Overload, Short-Circuit, Over Temperature Protection

DISPLAY	
LED Digital Display	Display Battery Voltage, Output Power, Output Voltage, Error Numbers

DC OUTPUT	
USB	USB-A type (5V2A)

COMMUNICATION	
PC	USB-B type

EFFICIENCY							
Peak Conversion efficiency	91%	90%	88%	90%	88%	90%	

ENVIRONMENT	
Protection Degree	IP20
Working Environment	Indoor Fan cooling
Environmental temperature	0~45°C
Ambient humidity	20%-90%, No condensation
Altitude	≤3000m

DIMENSIONS			
Machine Dimension (W*H*D)(mm)	261*133*79	314*195*80	415*220*82
Package Dimension (W*H*D)(single)	302*205*140	374*267*147	450*296*150
Package Dimension (W*H*D)	629*425*295(8pcs)	773*560*315(8pcs)	630*495*325(4pcs)
N.W(kg) (machine)	1.4	2.3	4.6

CERTIFICATION & STANDARDS	
Coming soon	

*The technical specifications of this document are subject to change without any notice

120V Series

Off Grid Solar Inverter/ On/Off Grid Hybrid Solar Inverter/ Grid-Tie Solar Inverter/ Off Grid Power Inverter



OFF GRID SPLIT PHASE SOLAR INVERTER PV1800 TLV Series




6KW | 120V,240V | Wifi

This split phase solar inverter PV1800 TLV series, capacity 6KW, DC 48V, it's applicable to 110VAC/120VAC markets demands, which has AC output of single phase 110VAC/120V, split phase 220V/240V; In LCD display, you can set output voltage, frequency, charging voltage, charging current to design best use based on different loads applications; meanwhile, it has built-in two 80A MPPT solar charge controllers, you can take use of sunshine freely and save electricity bills.




- Pure sine wave solar inverter
- Output power factor 1
- Built-in two 80A MPPT solar charge controllers
- WIFI remote monitoring (optional)
- Acid or Lithium Battery Select
- CAN/RS485 communication for BMS
- Compatible to generator

Back panel description

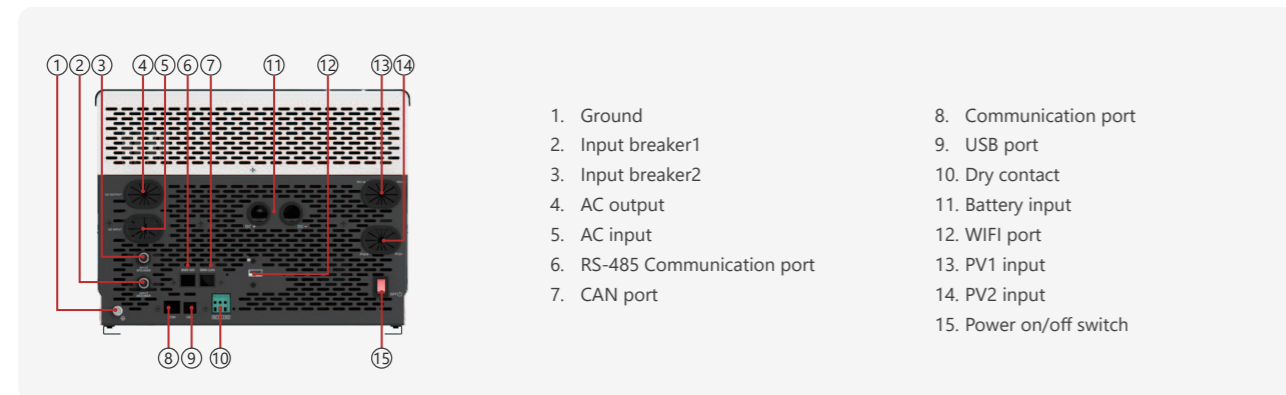

Solar system connection

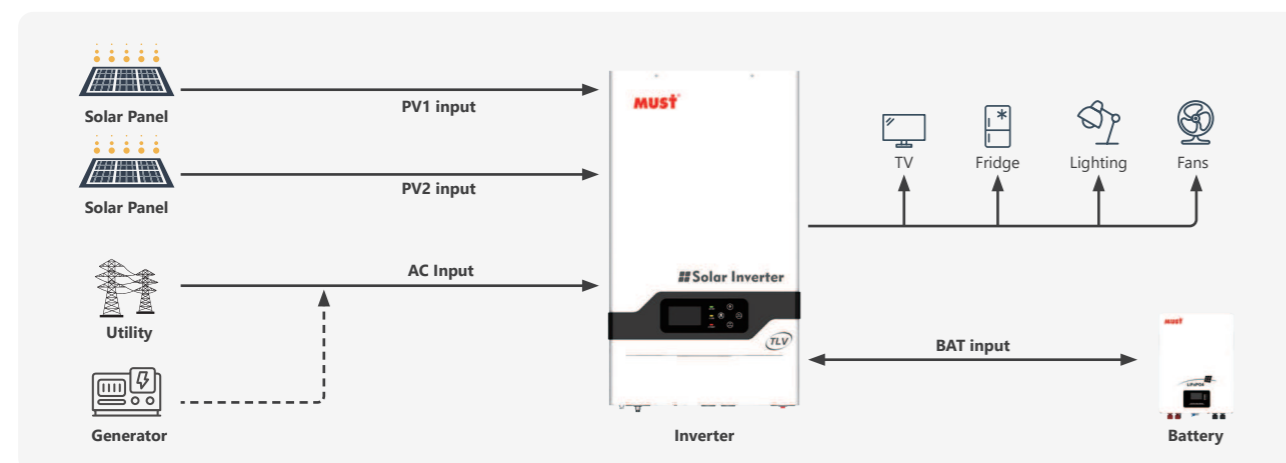

MODEL	PV18-6048 TLV
Nominal Battery System Voltage	48VDC
INVERTER OUTPUT	
Rated Power	6000W
Surge Power	12000VA
Waveform	Pure sine wave
AC Voltage Regulation (Batt.Mode)	120VAC/240VAC (L1/L2)
Inverter Efficiency(Peak)	90%~93%
Transfer Time	10ms (UPS / UL) 20ms (APL)
AC INPUT	
Voltage	240VAC (L1/L2/N)
Selectable Voltage Range	214~264VAC(UL)
Frequency Range	50Hz / 60Hz(Auto sensing)
BATTERY	
Normal voltage	48VDC
Floating Charge Voltage	54.8VDC
Overcharge Protection	60VDC
SOLAR CHARGER & AC CHARGER	
Maximum PV Array Open Circuit Voltage	250V
Maximum Solar Charge Current	80A/80A
PV Array MPPT Voltage Range	60~200VDC
PV Input Power	4000W/4000W
Maximum Efficiency	98%
Maximum AC Charge Current	60A/60A
Maximum Charge Current	280A
MECHANICAL SPECIFICATIONS	
Machine Dimension (W*H*D)(mm)	318*560*249
Package Dimension (W*H*D)(mm)	678*345*420
N.W(kg)	21.5
G.W(kg)	24
OTHER	
Humidity	5% to 95% Relative humidity (Non-condensing)
Operating Temperature	-10°C~50°C
Storage Temperature	-15°C~60°C
Standard Warranty	2 year
CERTIFICATION & STANDARDS	
CE-LVD (IEC62109-1, EN IEC62109-2); UKCA-(BS EN 62109-1, BS EN 62109-2)	

*The technical specifications of this document are subject to change without any notice

LOW FREQUENCY SPLIT PHASE SOLAR INVERTER PV3300 TLV Series


3~6KW | AC110V/220V | MPPT 80A | WiFi | BMS

This split phase solar inverter PV3300 TLV series, capacity range from 3KW-6KW, DC24V/48V, it's applicable to 110VAC/120VAC markets demands, which has AC output of single phase 110VAC/120V, split phase 220V/240V; In LCD display, you can set output voltage, frequency, charging voltage, charging current to design best use based on different loads applications; meanwhile, it has built-in MPPT solar charge controller 80A, you can take use of sunshine freely and save electricity bills.




- Friendly user interface; MFD (multi-function display)
- 3 Steps charging
- Overload and short-circuit protection
- Set charging voltage/charging current.
- Battery low voltage shutdown point can be set to 10/10.5/11/11.5/12V
- Set utility priority/ Battery priority
- Set utility input wide/narrow range
- Inverter voltage can be set to 100/110/120; frequency can be set to 50/60Hz
- Set utility charging on/off switch
- Built-in 80A MPPT charger
- Acid or Lithium Select
- WiFi port (optional)
- With BMS lithium battery communication function (CAN port)

Back panel description

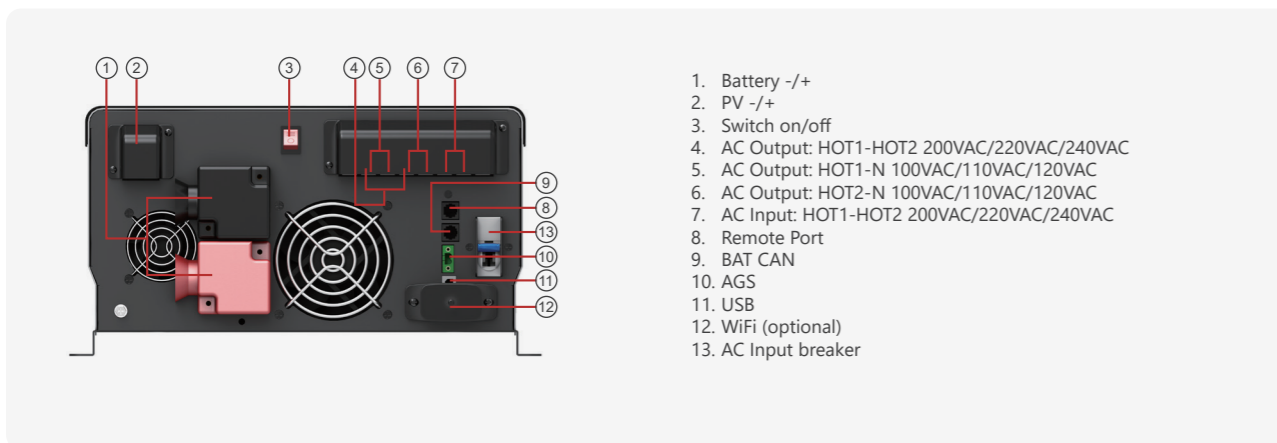

Solar system connection

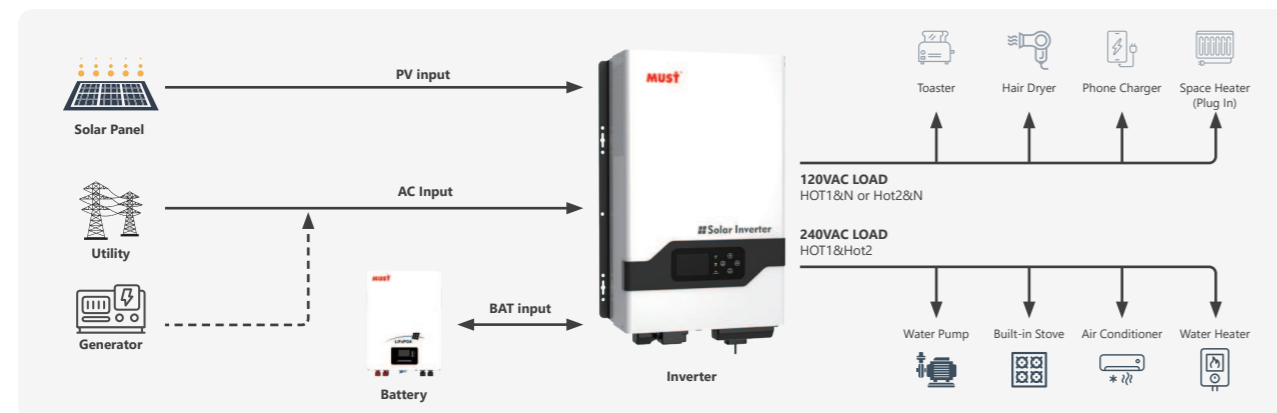

MODEL	PV33-3024 TLV	PV33-3048 TLV	PV33-4024 TLV	PV33-4048 TLV	PV33-5048 TLV	PV33-6048 TLV
INVERTER OUTPUT						
Rated power	3KW		4KW		5KW	6KW
Power factor	1					
Wave form	Pure sine wave					
Output voltage RMS	100V / 110V / 120VAC (200V / 220V / 240VAC) ±10%					
Output frequency	50Hz or 60Hz (±0.3Hz)					
Inverter efficiency (peak)	>85%					
Line mode efficiency	>95%					
Overload	100%<Load<110% (alarm 5min then stop output and fault code 07) 110%<Load<125% (alarm 60s then stop output and fault code 07) Load > 125% (alarm 10s then stop output and fault code 07)					
Surge rating	9000VA	12000VA		15000VA	18000VA	
Capable of starting electric motor	1.5P	2P		3P		
BATTERY						
Battery voltage	24VDC/48VDC				48VDC	
Minimum start voltage	10V/ 10.5V/ 11V/ 11.5V/ 12V±0.5V; 12VDC×2 for 24V; ×4 for 48VAC					
Low battery cut off	low voltage fault code 04 (10V/ 10.5V/ 11V/ 11.5V/ 12V) for 12V model (21V/21V /22V/ 23V/ 24V) for 24V model (40V/ 42V/ 44V/ 46V/ 48V) for 48V model					
Low battery alarm	Add 0.5/battery: (low battery alarm one second one time) (10V/ 10.5V/ 11V/ 11.5V/ 12V) +0.5VDC for 12V model (21V/ 21V/ 22V/ 23V/ 24V) +1VDC for 24V model (40V/ 42V/ 44V/ 46V/ 48V) +2VDC for 48V model					
High voltage alarm	Add +1V/battery: (high voltage one second one time / after 30s fault 03) (12-14.5V) +1VDC for 12V model (24-29V) +2VDC for 24V model (48-58V) +4VDC for 48V model					
Save mode	Load ≤40W(110V) / 80W(220V)					
AC INPUT MODE						
Input waveform	Pure sine wave					
Nominal input voltage	200Vac / 220Vac / 240Vac					
Max input voltage	270Vac MAX					
Input frequency	50Hz / 60Hz (auto sensing)					
Efficiency (AC mode)	> 95% (load, full battery)					
Transfer time AC to DC	15ms(typical)					
SOLAR CHARGER						
Maximum PV Array Power	2500W	5000W	2500W	5000W	5000W	5000W
Maximum PV Charge Current	80A±4A					
DC Voltage	24V / 48V			24V / 48V		
MPPT Range @ Operating Voltage	30~230VDC @ 24V /60~230VDC @48V				60~230VDC @48V	
Maximum Solar Input Voltage	245±2Vdc			245±2Vdc		
Maximum Efficiency	>98%					
Standby Power Consumption	<2W					
CHARGE MODE						
Max charge current (±5A)	12V	/	/	/	/	/
	24V	40A	60A	/	/	/
	48V	20A	30A	35A	40A	/
Min charge current 10A. Change by every 5A						
DIMENSIONS						
Machine Dimension (W*H*D)(mm)	359.2*443*188			362*544*188		
Package Dimension (W*H*D)(mm)	598*308*457			698*308*457		
N.W(kg)	/			/		
G.W(kg)	/			/		
Standard Warranty	2 year					
CERTIFICATION & STANDARDS						
CE-EMC+LVD (EN6100-6-3, EN6100-6-1+EN IEC62109-1, EN IEC62109-2)						

*The technical specifications of this document are subject to change without any notice

LOW FREQUENCY SPLIT PHASE SOLAR INVERTER PV3600 TLV Series

8~12KW | 245V | 100A, 200A


PV3600 TLV series is a multi-function inverter, combining functions of inverter and MPPT solar charge controller, solar charger and battery charger to offer uninterruptible power support. The comprehensive LCD display offers user-configurable and easy-accessible button operation such as battery charging current, AC/solar charger priority, and selectable input voltage based on different applications.




- Smart LCD setting(Working modes, Charge Current, Charge voltage, etc.)
- Built-in MPPT solar charge controller 100A/200A
- MPPT efficiency max 98%
- Powerful charge rate up to 140Amp
- Inside BMS function
- DC start & Automatic Self-Diagnostic Function
- WIFI / USB monitoring function (wi-fi optional)
- Supporting AGS, BTS port
- Compatible to generator



Back panel description

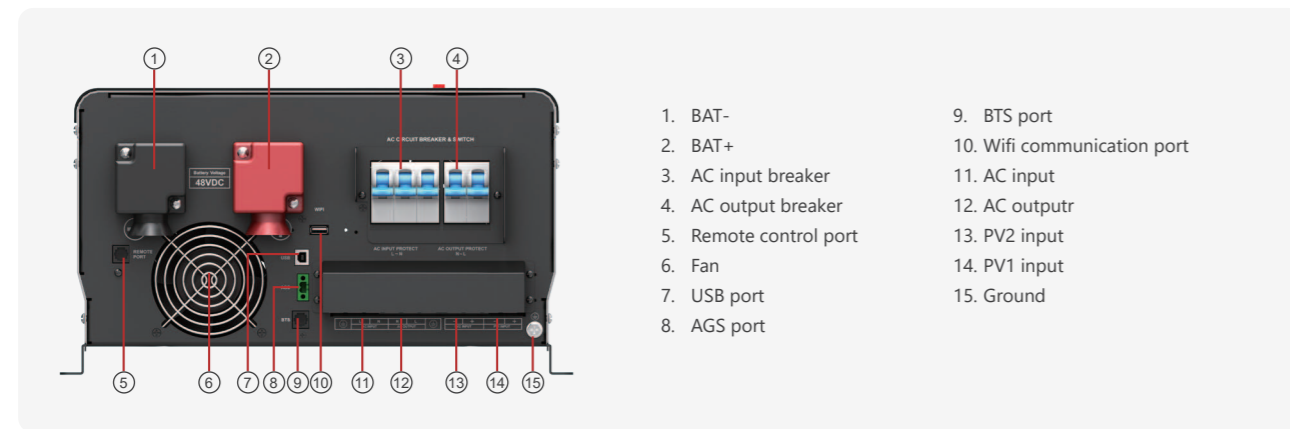

Solar system connection

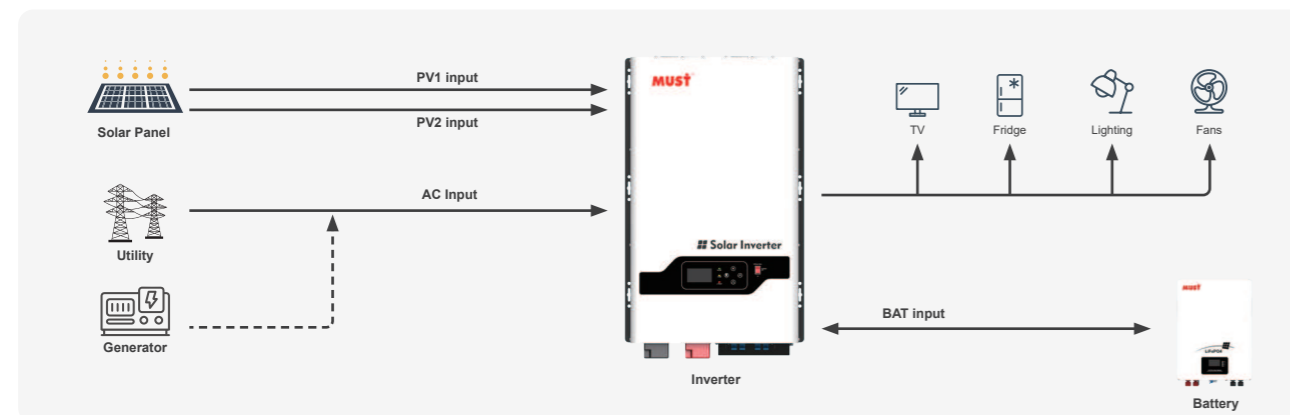

MODEL	PV36-8048 TLV	PV36-10048 TLV	PV36-12048 TLV
Nominal Battery System Voltage	48VDC	48VDC	48VDC
INVERTER OUTPUT			
Rated power	8.0KW	10.0KW	12.0KW
Surge rating	24000VA	30000VA	36000VA
Capable of starting electric motor	4HP	5HP	6HP
Waveform	Pure sine wave / same as input (bypass mode)		
Nominal output voltage RMS	100V/110V/120V/200V/220V/240V		
Output frequency	50Hz / 60Hz ± 0.3Hz		
Inverter efficiency(peak)	>88%		
Line mode efficiency	>95%		
Power factor	1.0		
Typical transfer time	20ms(max)		
AC INPUT			
Voltage	220V/230V/240V		
Selectable voltage range	90-280 VAC (APL)		
Frequency range	50Hz / 60Hz		
BATTERY			
Low battery voltage cutoff	40-48VDC for 48VDC mode		
Low battery voltage recover	42-50VDC for 48VDC mode		
High battery voltage cutoff	60VDC for 48VDC mode		
High battery voltage recover	57VDC for 48VDC mode		
Power saving mode	<600W		
AC CHARGER			
Output voltage	Depends on battery type		
Charger AC input breaker rating	80A	80A	80A
Overcharge protection S.D.	62.8VDC for 48VDC mode		
Maximum charge current	60A	70A	80A
BTS			
Continuous output power	Yes Variances in charging voltage & S.D. voltage base on the battery temperature		
BYPASS & PROTECTION			
Input voltage waveform	Sine wave (grid or generator)		
Nominal input frequency	50Hz or 60Hz		
Overload protection (SMPS Load)	Circuit breaker		
Output short circuit protection	Circuit breaker		
Bypass breaker rating	63A	63A	63A
Max bypass current	80A		
SOLAR CHARGER			
Maximum PV charge current	100A/200A		
DC voltage	48V		
Maximim PV array power	5000W(10000W for 200A optional)		
MPPT range @ operating voltage(VDC)	64~235VDC		
Maximum PV array open circuit voltage	250VDC		
Maximum efficiency	>98%		
Standby power consumption	<2W		
MECHANICAL SPECIFICATIONS			
Mounting	Wall mount		
Machine Dimension (W*H*D)(mm)	402*674*222		
Package Dimension (W*H*D)(mm)	818*415*577.5		
N.W(kg)	/		
G.W(kg)	/		
OTHER			
Operating Temperature Range	0°C to 50°C		
Storage temperature	-15°C to 60°C		
Audible noise	60dB MAX		
Display	LED+LCD		
Standard Warranty	2years		
CERTIFICATION & STANDARDS			
CE-LVD (IEC62109-1:2010, EN IEC62109-2:2011)			

*The technical specifications of this document are subject to change without any notice

LOW FREQUENCY SPLIT PHASE SOLAR INVERTER PV3900 TLV Series

8~12KW | PV 250V | MPPT 200A


PV3900 TLV series is a multi-function inverter, combining functions of inverter and MPPT solar charge controller, solar charger and battery charger to offer uninterruptible power support. The comprehensive LCD display offers user-configurable and easy-accessible button operation such as battery charging current, AC/solar charger priority, and selectable input voltage based on different applications.




- Smart LCD setting(Working modes, Charge Current, Charge voltage, etc.)
- Built-in MPPT solar charge controller 200A
- MPPT efficiency max 98%
- Powerful charge rate up to 200A
- Inside BMS function
- DC start & Automatic Self-Diagnostic Function
- WIFI monitoring function (optional)
- Compatible to generator
- Parallel operation with up to 3 units




Back panel description

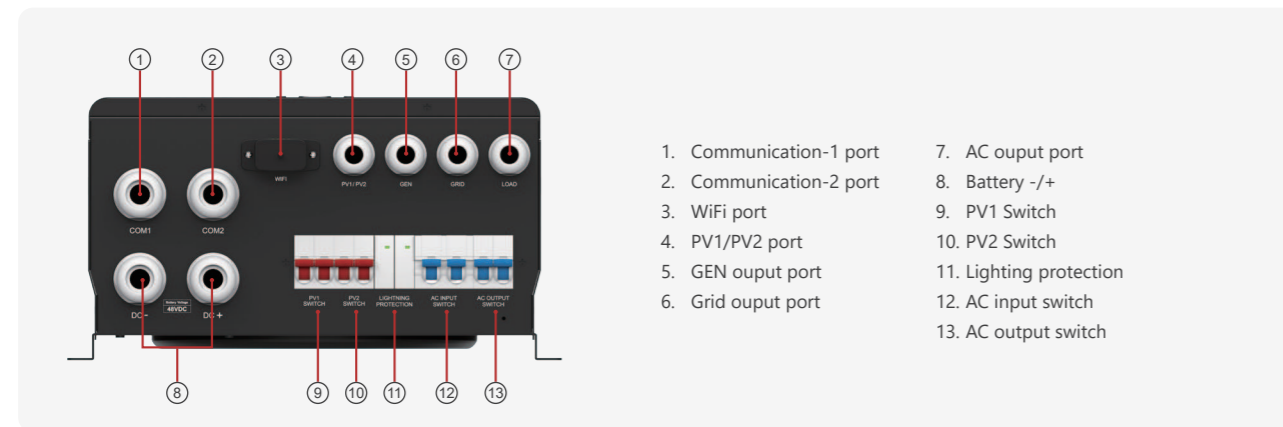

Parallel operation

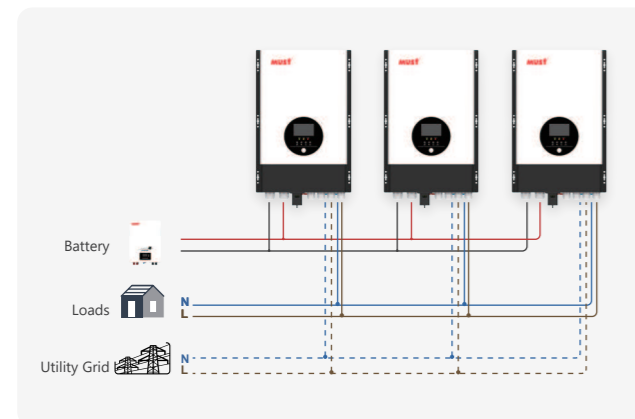

Solar system connection

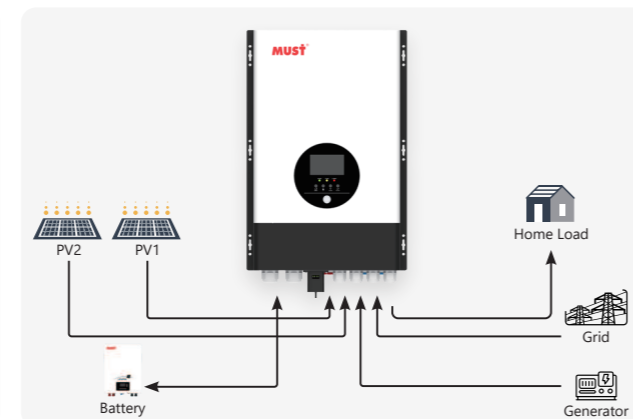

MODEL	PV39-8048 TLV	PV39-10048 TLV	PV39-12048 TLV
Nominal Battery System Voltage	48VDC		
Stand-alone mode	Yes		
Parallel operation	3 units		
INVERTER OUTPUT			
Rated power	8KW	10KW	12KW
Surge rating	24000VA	30000VA	36000VA
Capable of starting electric motor	4HP	5HP	6HP
Waveform	Pure sine wave / same as input (bypass mode)		
Nominal output voltage RMS	100V/110V/120V/200V/220V/240V		
Inverter efficiency(peak)	>90%		
Line mode efficiency	>95%		
Power factor	1.0		
Typical transfer time	10ms(max)		
AC INPUT			
Voltage	220V/230V/240V		
Selectable voltage range	90-280 VAC (APL)		
Frequency range	50Hz / 60Hz		
BATTERY			
Low battery voltage cutoff	40-48VDC for 48VDC mode		
Low battery voltage recover	42-50VDC for 48VDC mode		
High battery voltage cutoff	60VDC for 48VDC mode		
High battery voltage recover	57VDC for 48VDC mode		
No-load loss	<50W		
AC CHARGER			
Output voltage	Depends on battery type (Supports lead-acid, gel, and lithium batteries)		
Charger AC input breaker rating	100A		
Overcharge protection S.D.	62.8VDC for 48VDC mode		
Maximum charge current	10-140A (setting) battery terminal		
BTS			
Continuous output power	Yes Variances in charging voltage & S.D. voltage base on the battery temperature		
BYPASS & PROTECTION			
Input voltage waveform	Sine wave (grid or generator)		
Nominal input frequency	50Hz or 60Hz		
Overload protection (SMPS Load)	Software + Circuit breaker		
Output short circuit protection	Software + Circuit breaker		
Bypass breaker rating	63A		
Max bypass current	80A		
SOLAR CHARGER			
Maximum PV charge current	200A		
DC voltage	48V		
Maximim PV array power	10000W	10000W	10000W
MPPT range @ operating voltage(VDC)	64~235VDC		
Maximum PV array open circuit voltage	250VDC		
Maximum efficiency	>98%		
Standby power consumption	<2W		
MECHANICAL SPECIFICATIONS			
Mounting	Wall mount		
Packing	Wooden box		
Machine Dimension (W*H*D)(mm)	439*660.5*233.2		
Package Dimension (W*H*D)(mm)	782*314.5*520.5		
N.W(kg)	55	62	69
G.W(kg)	73	80	87
OTHER			
Operation temperature range	0°C to 50°C		
Storage temperature	15°C to 60°C		
Audible noise	60dB MAX		
Communication	WiFi		
Display	LED+LCD		
Standard Warranty	2 year		
CERTIFICATION & STANDARDS			
CE-LVD (IEC62109-1:2010, EN IEC62109-2:2011); UL1741			

*The technical specifications of this document are subject to change without any notice

SOLAR INVERTER PV1500 LV Series


600W-1500W | 120VAC




It is a cost effective, intelligent solar inverter which accepts Solar & Utility input at the same time. The comprehensive LCD display offers user-configurable and easy-accessible button adjustment such as battery charging current, AC/solar charger priority and DC priority. When battery voltage is low, it will automatically switch to AC grid to supply continuous power to the loads.

- Built-in 40A MPPT Solar Charge Controller
- 40A@12VDC or 20A@24VDC standard charging current from utility AC
- AC/solar priority for charging via MFD
- Different charging mode for different kinds of batteries
- Overload & short-circuit protection, Battery reverse polarity protection, Deep discharge protection
- Auto restart while AC/solar is recovering Adjustable solar and utility charging current
- Support fast max charging current setting
- Support two kinds of batteries: LiFePO4 Lithium Battery Pack and Lead-acid Battery
- Automatic activate lithium battery pack which is be over discharged no output when AC Grid or PV input is OK

Back panel description

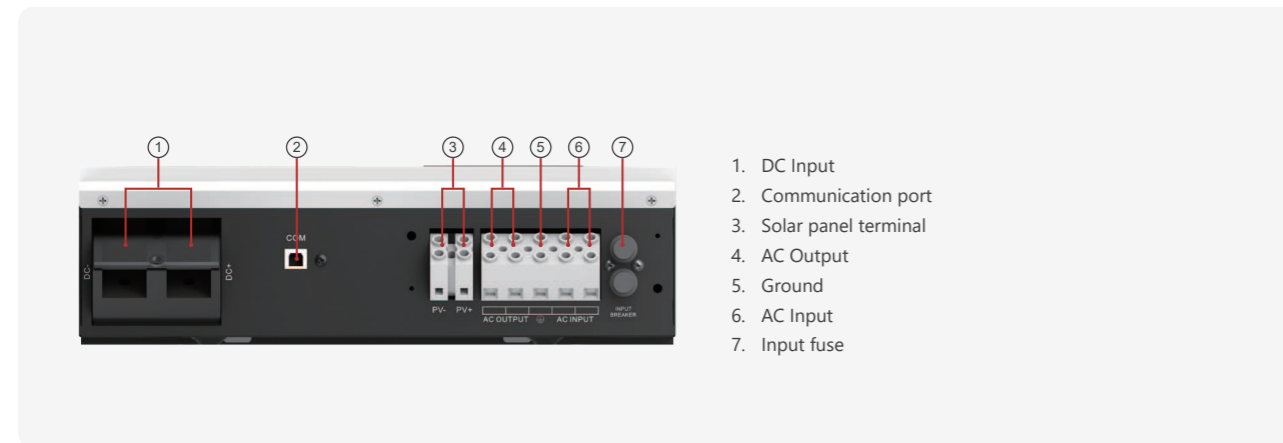

Solar system connection

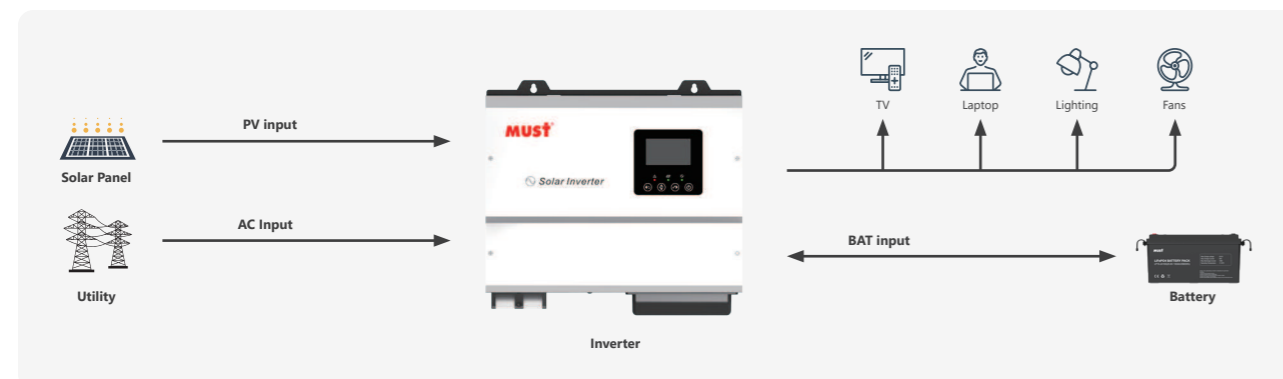

MODEL	PV15-0612 LV	PV15-1012 LV	PV15-1524 LV	
Nominal Battery System Voltage	12VDC	12VDC	24VDC	
INVERTER OUTPUT				
Rated Power	600VA / 600W	1000VA / 1000W	1500VA / 1500W	
Waveform	Pure Sine Wave			
Nominal Output Voltage RMS	120VAC			
Output Voltage Regulation	+10/-18%			
Output Frequency	50Hz / 60Hz ± 1Hz			
Inverter Efficiency (Peak)	>90%			
Line Mode Efficiency	>95%			
Typical Transfer Time	Typical 10ms(UPS,UL) , Typical 20ms(APL,DEF)			
AC INPUT				
Voltage	120VAC			
Voltage Range	74 ~ 145VAC ± 3%			
Frequency Range	40 ~ 65Hz ± 2Hz			
BATTERY				
Note: Below Parameters (PB) Lead-acid Battery / (LI) LiFePO4 Lithium Battery Pack - 12V(4 Series) 24V(8 Series)				
Nominal Input Voltage	12VDC		24VDC	
Low Battery Cutoff	10.5VDC(PB)	11.5VDC(LI)	21.0VDC(PB)	23.0VDC(LI)
Low Battery Alarm	11.0VDC(PB)	12.0VDC(LI)	22.0VDC(PB)	24.0VDC(LI)
Low Battery Voltage Recover	12.5VDC(PB)	12.8VDC(LI)	25.0VDC(PB)	25.6VDC(LI)
High Battery Voltage Recover	14.5VDC(PB)	14.5VDC(LI)	29.0VDC(PB)	29.0VDC(LI)
High Battery Voltage Cutoff	15.0VDC(PB)	15.0VDC(LI)	30.0VDC(PB)	30.0VDC(LI)
Charger Voltage boost	14.4VDC(PB)	14.4VDC(LI)	28.8VDC(PB)	28.8VDC(LI)
Charger Voltage float	13.8VDC(PB)	14.4VDC(LI)	27.6VDC(PB)	28.8VDC(LI)
SOLAR CHARGER & AC CHARGER				
Maximum PV Charge Current	40A (max)			
Maximum PV Array Power	600W		1200W	
MPPT Operating Voltage Range	15 ~ 75VDC		30 ~ 75VDC	
Maximum PV Array Open Voltage	105VDC			
Maximum Efficiency	> 95%			
AC Charging Current Max	40A (Can be set)		20A (Can be set)	
Maximum Charge Current AC+PV	80A (Can be set)		60A (Can be set)	
BYPASS & PROTECTION				
Output Short Circuit Protection	FUSE			
Bypass breaker Rating	15A	20A	30A	
Max Bypass Current	15A	20A	30A	
Battery Fuse Current	50A * 2	50A * 3	40A * 3	
DIMENSIONS				
Machine Dimension (W*H*D)(mm)	320*264.5*95			
Package Dimension (W*H*D)(mm)	390*335*167			
N.W(kg)	4.5		4.7	
G.W(kg)	5.4		5.6	
OTHER				
Operating Temperature Range	0°C to 45°C			
Audible Noise	50dB MAX			
Display	LED+LCD			
Standard Warranty	2 year			
CERTIFICATION & STANDARDS				
////////////////////				

*The technical specifications of this document are subject to change without any notice

HIGH FREQUENCY OFF GRID SOLAR INVERTER PV1800 LV Series

1~3KW | 120V | Wifi


PV1800 LV Series is a multi-function inverter/charger, combining functions of inverter, MPPT solar charger and battery charger to offer uninterrupted power support with portable size. Its comprehensive LCD display offers user-configurable and easy-accessible button operation such as battery charging current, AC/solar charger priority, and acceptable input voltage based on different applications.




- Pure sine wave solar inverter
- Output power factor 1
- Built-in 80A MPPT solar charger
- 2 units can be wired in parallel to create a split-phase system with 120V and 240V capabilities (only for 3kw)
- Support parallel operation up to 3 units (only for 3kw)
- WIFI remote monitoring (optional)
- CAN/RS485 communication for BMS
- Compatible to generator



Back panel description

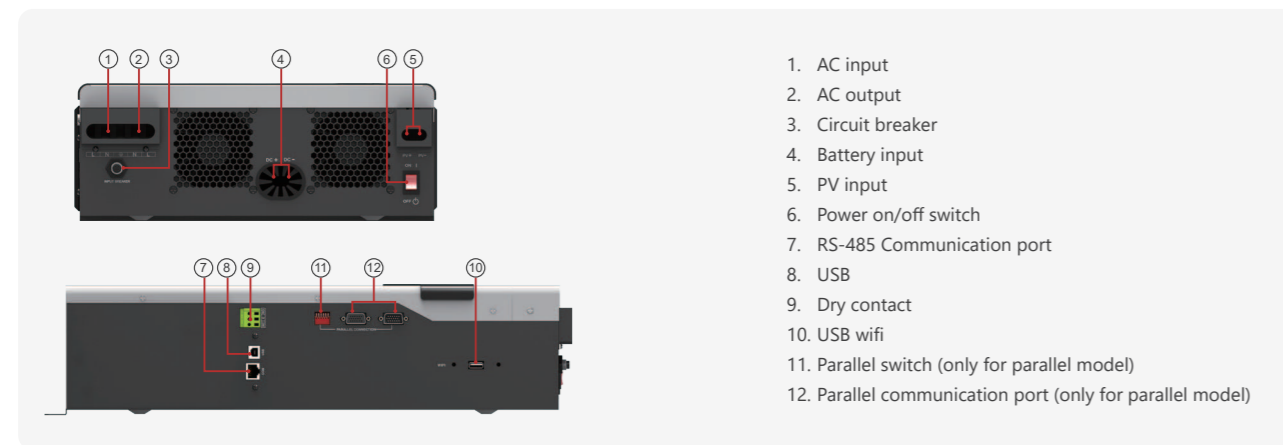

Solar system connection

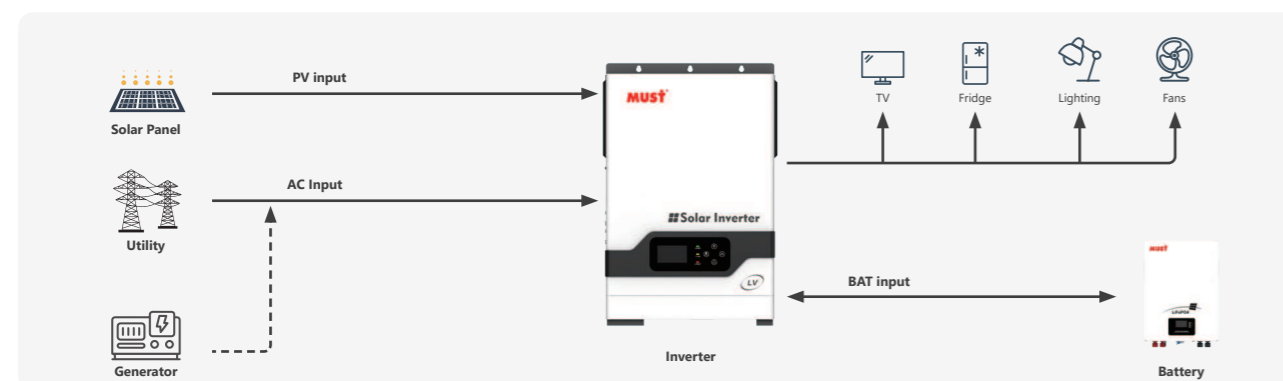

MODEL	PV18-1012 LV	PV18-1512 LV	PV18-1524 LV	PV18-2024 LV	PV18-3024 LV	PV18-3048 LV
Nominal Battery System Voltage	12VDC	12VDC	24VDC	24VDC	24VDC	48VDC
INVERTER OUTPUT						
Rated Power	1000W	1500W	1500W	2000W	3000W	3000W
Surge Power	1000W	1500W	1500W	4000W	6000W	6000W
Waveform	Pure sine wave					
AC Voltage Regulation (Batt.Mode)	120VAC ±5%					
Inverter Efficiency(Peak)	90%~93%					
Transfer Time	10ms (UPS / UL) 20ms (APL)					
AC INPUT						
Voltage	120VAC					
Selectable Voltage Range	107~132VAC(UL)					
Frequency Range	50Hz / 60Hz(Auto sensing)					
BATTERY						
Normal voltage	12VDC	12VDC	24VDC	24VDC	24VDC	48VDC
Floating Charge Voltage	13.7VDC	13.7VDC	27.4VDC	27.4VDC	27.4VDC	54.8VDC
Overcharge Protection	15VDC	15VDC	30VDC	30VDC	30VDC	60VDC
SOLAR CHARGER & AC CHARGER						
Max. PV Array Open Circuit Voltage	105V	145V	160V	160V	450VDC	250VDC
Max. Solar Charge Current	60A	60A	60A	60A	100A	80A
PV Array MPPT Voltage Range	15~105VDC	15~130VDC	30~128VDC	30~128VDC	90~430VDC	60~200VDC
PV Input Power	750W	750W	1500W	1500W	4000W	4000W
Maximum Efficiency	98%					
Maximum AC Charge Current	10A	10A	30A	40A	80A	60A
Maximum Charge Current	70A	70A	90A	100A	100A	140A
MECHANICAL SPECIFICATIONS						
Machine Dimension (W*H*D)(mm)	224*321*95	255*321*125	254.5*367.4*103		329*485*134	
Package Dimension (W*H*D)(mm)	410*188*300	416*216*342	436*189*331		575*425*229	
N.W(kg)	5.0	5.5	5.4	5.5	8	10
G.W(kg)	6.0	6.5	6.4	6.5	9.5	11.5
OTHER						
Humidity	5% to 95% Relative humidity (Non-condensing)					
Operating Temperature	-10°C~50°C					
Storage Temperature	-15°C~60°C					
Standard Warranty	2 years					
CERTIFICATION & STANDARDS						
CE-LVD (IEC62109-1, EN IEC62109-2); UKCA-(BS EN 62109-1, BS EN 62109-2)						

*The technical specifications of this document are subject to change without any notice

LOW FREQUENCY SOLAR INVERTER PV2900 LHP Series

1~6KW | AC 120V | MPPT80A | WIFI | BMS | Dual output




PV2900 LHP series is very economical pure sine wave solar inverter, AC voltage 110V/120V, AC charger inbuilt, from 20A to 60A; MPPT solar charger 80A inbuilt; Solar/AC priority is configurable, when setting solar priority, solar will charge batteries as first priority, and AC can also charge batteries when solar charger current is not enough, it enables inverter to operate with all kinds of home appliances, widely selling to Latin America.




- Pure sine wave output
- 3 Steps charging
- Overload and short-circuit protection
- Set charging voltage/charging current.
- Battery low voltage shutdown point can be set to 10/10.5/11/11.5/12V
- Power-save mode
- Set utility priority/ Battery priority
- Set utility input wide/narrow range
- Inverter voltage can be set to 120V:110V/115V/120V
- Inverter frequency can be set to 50/60Hz
- Set utility charging on/off switch
- 80A MPPT charger
- Acid or Lithium Select
- WiFi port (optional)
- With BMS lithium battery communication function (CAN port)
- Dual output for smart load management

Back panel description

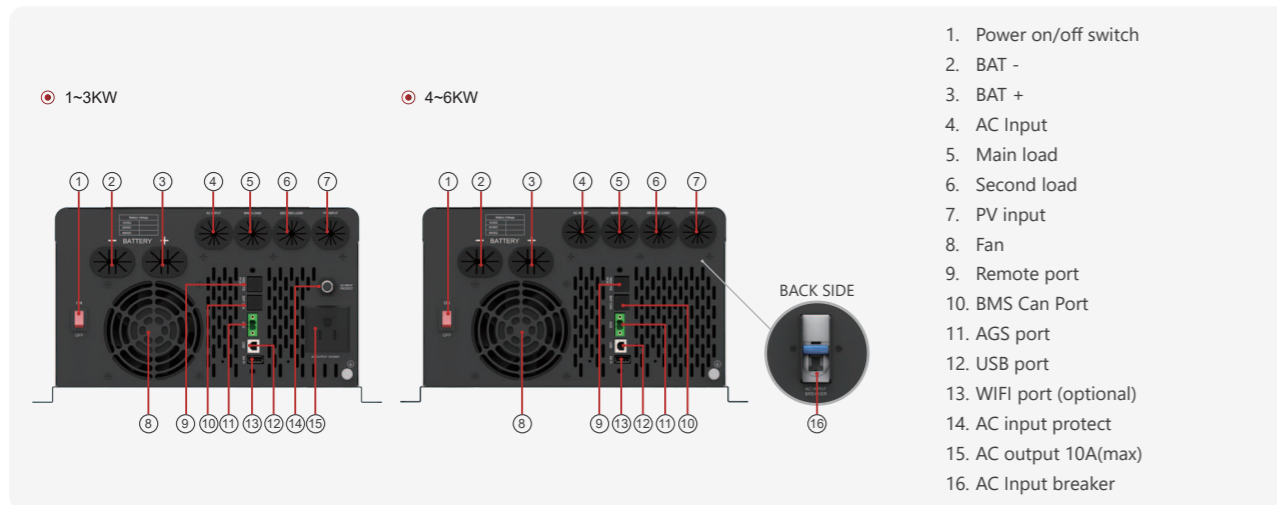

1. Power on/off switch
2. BAT -
3. BAT +
4. AC Input
5. Main load
6. Second load
7. PV input
8. Fan
9. Remote port
10. BMS Can Port
11. AGS port
12. USB port
13. WIFI port (optional)
14. AC input protect
15. AC output 10A(max)
16. AC Input breaker

Solar system connection

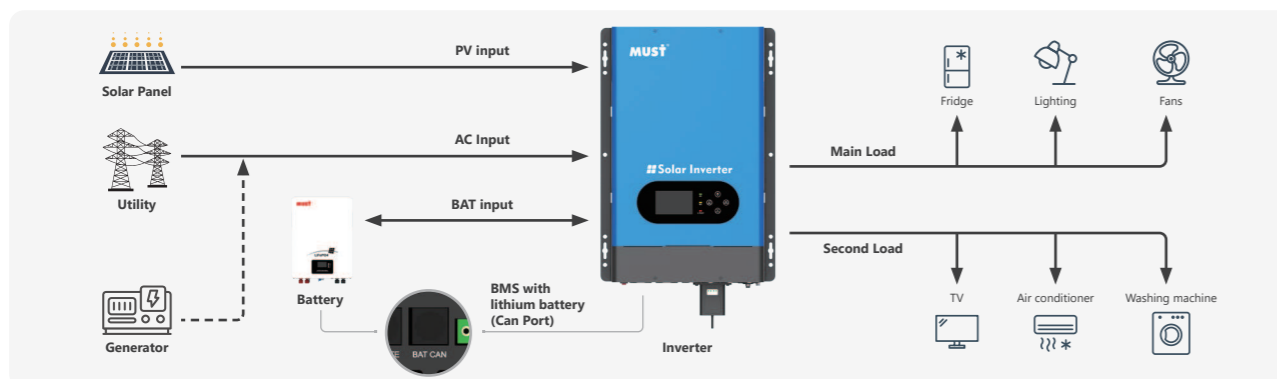

MODEL	PV29-1KW-LHP		PV29-1.5KW-LHP		PV29-2KW-LHP		PV29-3KW-LHP		PV29-4KW-LHP		PV29-5KW-LHP		PV29-6KW-LHP	
Nominal Battery System Voltage	12VDC	24VDC	12VDC	24VDC	12VDC	24VDC	24VDC	48VDC	24VDC	48VDC	48VDC		48VDC	
INVERTER OUTPUT														
Rated Power	1 KW		1.5 KW		2 KW		3 KW		4 KW		5 KW		6 KW	
Surge Rating	3000VA		4500VA		6000VA		9000VA		12000VA		15000VA		18000VA	
Capable Of Starting Electric Motor	1P		1P		1.5P		2P				3P			
Waveform	Pure sine wave / same as input (bypass mode)													
Nominal Output Voltage RMS	110V / 115V / 120VAC(±10% RMS)													
Output Frequency	50Hz / 60Hz ±0.3Hz													
Inverter Efficiency (Peak)	>88%													
Line Mode Efficiency	>95%													
Power Factor	1.0													
Typical Transfer Time	10ms(max)													
Overload	100% < Load < 110% (alarm 5min then stop output and fault code 07) 110% < Load < 125% (alarm 60s then stop output and fault code 07) Load > 125% (alarm 10s then stop output and fault code 07)													
AC INPUT														
Voltage	110/120VAC													
Selectable Voltage Range	75~135VAC (For personal computers)													
Frequency Range	50Hz / 60Hz(Auto sensing) 40~80Hz													
BATTERY														
Minimum Start Voltage	(10V / 10.5V / 11V / 11.5V/ 12V)+0.5V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)													
Low Battery Alarm	(10V / 10.5V / 11V / 11.5V/ 12V)+0.5V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)													
Low Battery Cut Off	10V / 10.5V / 11V / 11.5V/ 12V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)													
High Voltage Alarm	(12-14.5V)+1V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)													
High Battery Voltage Recover	(12-14.5V)+0.5V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)													
Idle Consumption-Search Mode	Load ≤50±20W(120V)/100±20W(220V)													
CHARGER														
Output Voltage	Depends on battery type													
Overcharge Protection S.D.	15.5VDC for 12VDC mode (*2 for 24VDC mode, *4 for 48VDC mode)													
Maximum Charge Current	30A	20A	45A	25A	60A	30A	40A	20A	60A	30A	35A	40A		
PAYPASS & PROTECTION														
Input Voltage Waveform	Sine wave (grid or generator)													
Nominal Input Frequency	50Hz or 60Hz													
Overload Protection (SMPS Load)	Circuit breaker													
Output Short Circuit Protection	Circuit breaker													
AC Input Breaker	1-3K/40A							4-6K/63A						
SOLAR CHARGER														
Maximum PV Array Power	1250W	2500W	1250W	2500W	1250W	2500W	2500W	5000W	2500W	5000W	5000W	5000W	5000W	
Maximum PV Charge Current	80A±4A													
DC Voltage	12V/ 24V auto work										24V/ 48V auto work			
MPPT Range @ Operating Voltage	15~95VDC @ 12V/ 30~230VDC @ 24V										30~230VDC @ 24V/ 60~230VDC @ 48V			
Maximum PV Array Open Circuit Voltage	245VDC													
Standby Power Consumption	<2W													
MECHANICAL SPECIFICATIONS														
Mounting	Wall Mount													
Machine Dimension (W*H*D)(mm)	274*484*174							274*568.5*174						
Package Dimension (W*H*D)(mm)	583.5*255*376							668.5*255*376						
N.W(kg)	/							/						
G.W(kg)	/							/						
OTHER														
Operating Temperature Range	0°C to 40°C													
Storage Temperature	-15°C to 60°C													
Audible Noise	60dB MAX													
Display	LED+LCD													
Standard Warranty	2 years													
CERTIFICATION & STANDARDS														
CE-EMC+LVD (EN6100-6-3:2007, EN6100-6-1:2017+EN IEC62109-1:2010, EN IEC62109-2:2011)														

*The technical specifications of this document are subject to change without any notice

LOW FREQUENCY SOLAR INVERTER PV3000 LVHM Series


1~6KW | AC120V | MPPT 80A | WIFI | BMS

PV3000 LVHM series is very economical pure sine wave solar inverter, AC voltage 110V/120V, AC charger inbuilt, from 20A to 60A; MPPT solar charger 80A inbuilt; Solar/AC priority is configurable, when setting solar priority, solar will charge batteries as first priority, and AC can also charge batteries when solar charger current is not enough, it enables inverter to operate with all kinds of home appliances, widely selling to Latin America.




- Pure sine wave output
- 3 Steps charging
- Overload and short-circuit protection
- Set charging voltage/charging current.
- Battery low voltage shutdown point can be set to 10/10.5/11/11.5/12V
- Power-save mode
- Set utility priority/ Battery priority
- Set utility input wide/narrow range
- Inverter voltage can be set to 120V:110V/115V/120V
- Inverter frequency can be set to 50/60Hz
- Set utility charging on/off switch
- 80A MPPT charger
- Acid or Lithium Select
- WiFi port (optional)
- With BMS lithium battery communication function (CAN port)

Back panel description

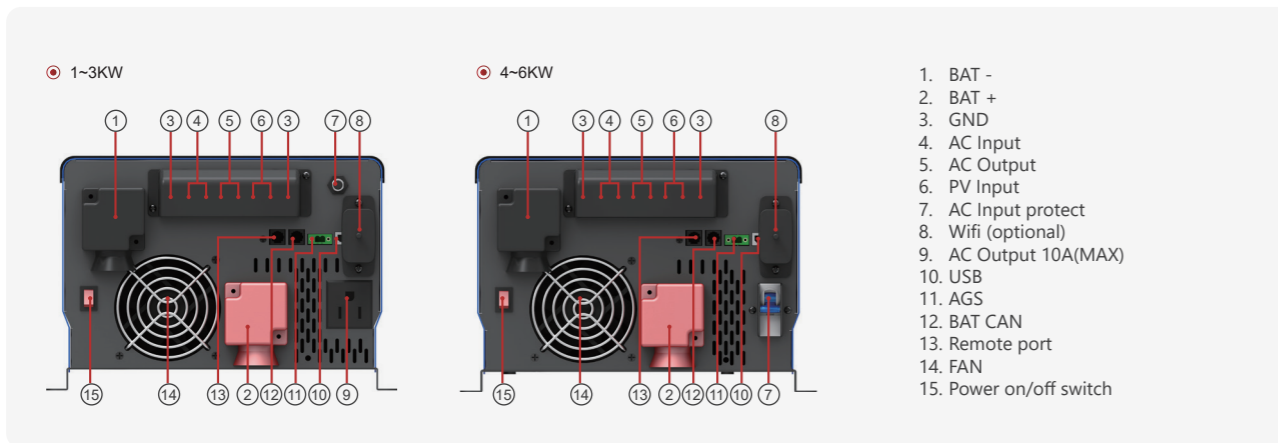

Solar system connection

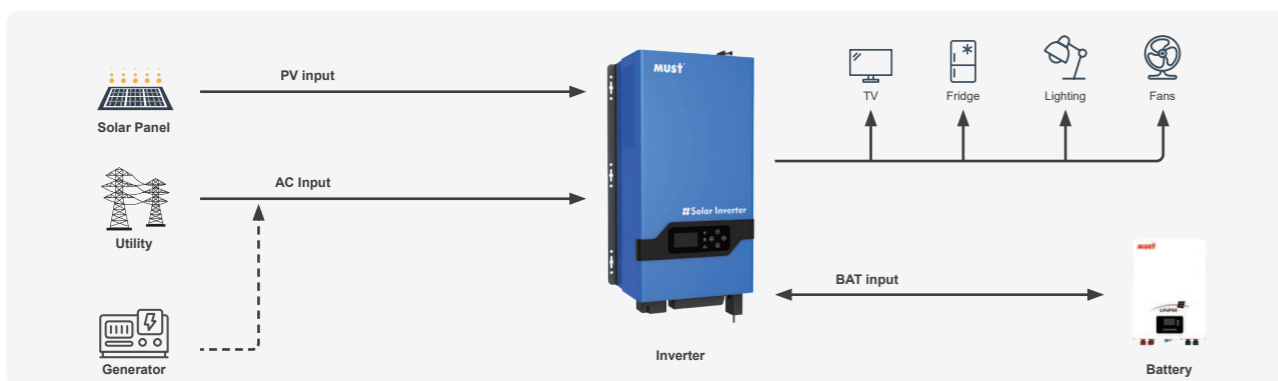

MODEL	PV30-1KW LVHM	PV30-1.5KW LVHM	PV30-2KW LVHM	PV30-3KW LVHM	PV30-4KW LVHM	PV30-5KW LVHM	PV30-6KW LVHM	
Nominal Battery System Voltage	12VDC 24VDC	12VDC 24VDC	12VDC 24VDC	24VDC 48VDC	24VDC 48VDC	48VDC	48VDC	
INVERTER OUTPUT								
Rated Power	1 KW	1.5 KW	2 KW	3 KW	4 KW	5 KW	6 KW	
Surge Rating	3000VA	4500VA	6000VA	9000VA	12000VA	15000VA	18000VA	
Capable Of Starting Electric Motor	1HP	1HP	1.5HP	1.5HP	2HP	3HP		
Waveform	Pure sine wave / same as input (bypass mode)							
Nominal Output Voltage RMS	110V / 115V / 120VAC(±10% RMS)							
Output Frequency	50Hz / 60Hz ±0.3Hz							
Inverter Efficiency (Peak)	>88%							
Line Mode Efficiency	>95%							
Power Factor	1.0							
Typical Transfer Time	10ms(max)							
Overload	100% < Load < 110% (alarm 5min then stop output and fault code 07) 110% < Load < 125% (alarm 60s then stop output and fault code 07) Load > 125% (alarm 10s then stop output and fault code 07)							
AC INPUT								
Voltage	110/120VAC							
Selectable Voltage Range	75~135VAC (For personal computers)							
Frequency Range	50Hz / 60Hz(Auto sensing) 40~80Hz							
BATTERY								
Minimum Start Voltage	(10V/ 10.5V/ 11V/ 11.5V/ 12V)+0.5V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)							
Low Battery Alarm	(10V/ 10.5V/ 11V/ 11.5V/ 12V)+0.5V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)							
Low Battery Cut Off	10V/ 10.5V/ 11V/ 11.5V/12V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)							
High Voltage Alarm	(12-14.5V)+1V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)							
High Battery Voltage Recover	(12-14.5V)+0.5V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)							
Idle Consumption-Search Mode	Load ≤50±20W(120V)							
CHARGER								
Output Voltage	Depends on battery type							
Overcharge Protection S.D.	15.7VDC for 12VDC mode (*2 for 24VDC mode, *4 for 48VDC mode)							
Maximum Charge Current	30A	20A	45A	25A	60A	30A	40A	
BYPASS & PROTECTION								
Input Voltage Waveform	Sine wave (grid or generator)							
Nominal Input Frequency	50Hz or 60Hz							
Overload Protection (SMPS Load)	Circuit breaker							
Output Short Circuit Protection	Circuit breaker							
AC input breaker	1-2K/30A		3K/40A		4-6K/63A			
SOLAR CHARGER								
Maximum PV Array Power	1250W	2500W	1250W	2500W	1250W	2500W	2500W	
Maximum PV Charge Current	80A±4A							
DC Voltage	12V / 24V auto work				24V / 48V auto work			
MPPT Range @ Operating Voltage	15~95VDC @ 12V 30~230VDC @ 24V		30~230VDC @ 24V 60~230VDC @48V		60~230VDC @48V			
Maximum PV Array Open Circuit Voltage	245VDC							
Standby Power Consumption	<2W							
MECHANICAL SPECIFICATIONS								
Mounting	Wall Mount							
Machine Dimension (W*H*D)(mm)	303*493*200				305*531*202			
Package Dimension (W*H*D)(mm)	615*319*400				688*319*400			
N.W(kg)	/				/			
G.W(kg)	/				/			
OTHER								
Operating Temperature Range	0°C to 40°C							
Storage Temperature	-15°C to 60°C							
Audible Noise	60dB MAX							
Display	LED+LCD							
Standard Warranty	2 year							
CERTIFICATION & STANDARDS								
/								

*The technical specifications of this document are subject to change without any notice

HIGH FREQUENCY POWER INVERTER/CHARGER EP1800 LV Series

3KW | 24V | 120V



This is a multi-function inverter/charger, combining functions of inverter, battery charger to offer uninterruptible power support with portable size. Its comprehensive LCD display offers user-configurable and easy-accessible button operation such as battery charging current, AC charger priority, and acceptable input voltage based on different applications.




- Pure sine wave inverter
- Configurable input voltage range for home appliances and personal computers via LCD setting
- Configurable battery charging current based on applications via LCD setting
- Configurable AC Charger via LCD setting
- Compatible to mains voltage or generator power
- Auto restart while AC is recovering
- Overload/ Over temperature/ short circuit protection
- Smart battery charger design for optimized battery performance
- Acid or Lithium select
- Parallel operation with up to 3 units
- WIFI remote monitoring (optional)
- With BMS lithium battery communication function (CAN port)

Back panel description



- | | |
|-----------------------------|--|
| 1. AC input | 6. Power on/off switch |
| 2. AC output | 7. Battery input |
| 3. RS485 communication port | 8. Parallel communication port (only for parallel model) |
| 4. USB port | 9. Parallel switch |
| 5. Dry contact | 10. WiFi port (optional) |

Solar system connection

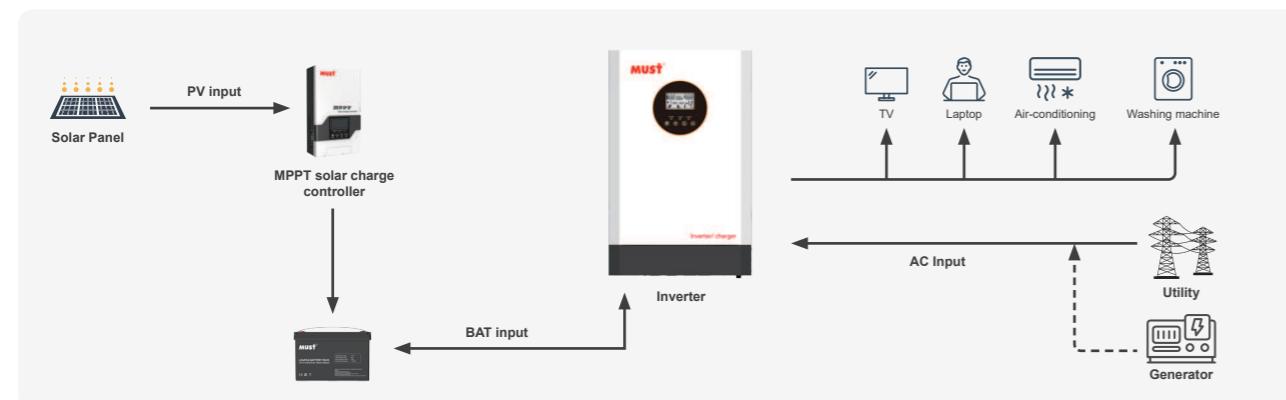

MODEL	EP18-3024LV	
Rated output power	3000VA/3000W	
Surge Power	6000W	
AC INPUT		
Nominal Input Voltage	120Vac±5%	
Selectable Voltage range	90~145VAC(UPS) / 74~145VAC(APL) / 108~132VAC(UL)	
Frequency Range	50Hz/60Hz (Auto sensing)	
Inverter Efficiency(Peak)	95%	
INVERTER OUTPUT		
Output voltage waveform	Pure sine wave	
Output Voltage Regulation	120Vac ± 5%	
Output Frequency	50Hz / 60Hz(Auto sensing)	
Power Factor	≈1	
Transfer Time	10ms (UPS / UL) / 20ms (APL) <50ms(For parallel operation)	
Nominal DC Input Voltage	24VDC	
Cold Start Voltage	23VDC	
Output Short Circuit Protection	Line mode	Circuit Breaker
	Battery mode	Electronic Circuits
BATTERY		
Battery voltage	24VDC	
Floating voltage	27.4V	
Overcharge Protection	30V	
CHARGER		
Charging Current(UPS) @Nominal Input Voltage	Default:30A; MAX:80A	
Bulk Charging Voltage	28.8Vdc	
Floating Charging Voltage	27.4Vdc	
Charging Algorithm	3-Step	
MECHANICAL SPECIFICATIONS		
Machine Dimension (W*H*D)(mm)	297.5*468*125	
Package Dimension (W*H*D)(mm)	/	
N.W(kg)	/	
G.W(kg)	/	
GENERAL		
Mounting	Wall mount	
Display	LED+LCD	
Parallel operation	3 units	
Operation Temperature Range	-10°C to 50°C	
Storage Temperature	-15°C to 60°C	
Standard Warranty	2 years	
CERTIFICATION & STANDARDS		
CE-EMC+LVD (EN6100-6-4,EN6100-6-2+EN IEC62109-1)		

*The technical specifications of this document are subject to change without any notice

POWER INVERTER/CHARGER EH2900 LV Series


300W~1000W | 12V/24V | 10~30A | AC 120V

EH2900 LV series inverter is a cost effective, intelligent with UPS function. The comprehensive LCD offers user-configurable and easy-accessible button adjustment such as battery charge current, battery charge voltage, frequency, buzzer etc. It's perfect for the user who need a simple and economical inverter, with user-friendly installation and setting.




- Sine wave inverter
- Adjustable charging current from utility
- Adjustable battery charging current
- 3 steps charging algorithm
- Friendly user interface
- Multi-function display
- Overload and short-circuit protection
- Battery reverse polarity protection
- Deep discharge protection
- Automatic voltage regulation Communication with PC

Back panel description

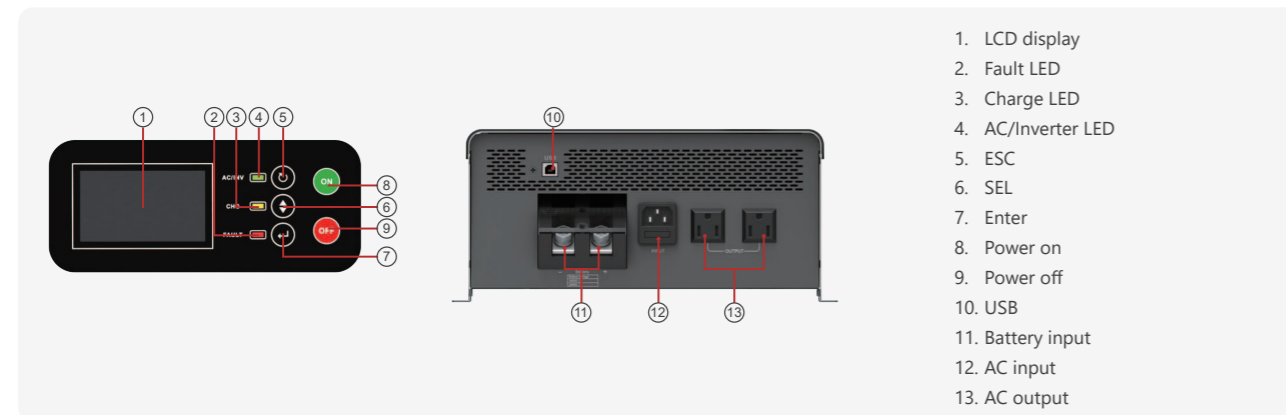

Solar system connection

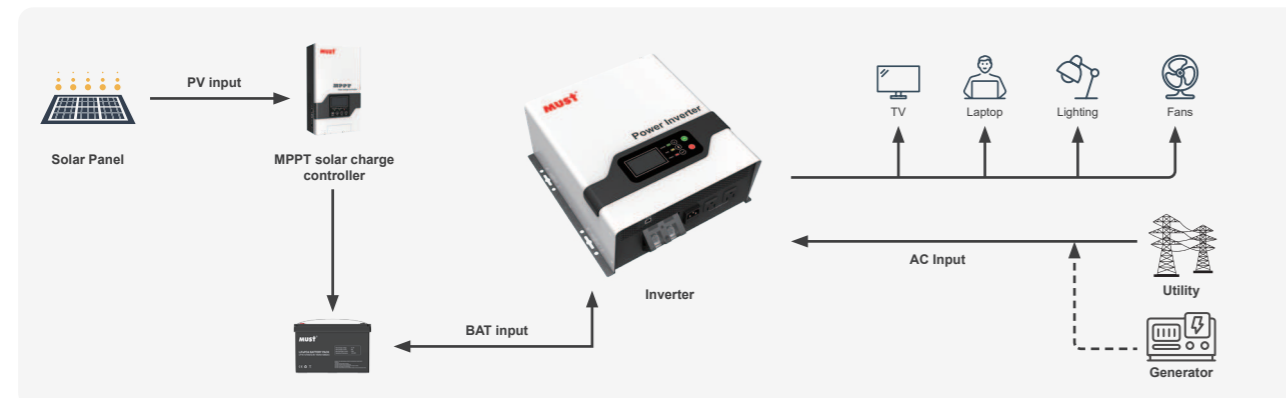

MODEL	EH29-0312 LV	EH29-0412 LV	EH29-0512 LV	EH29-0612 LV	EH29-0812 LV	EH29-1012 LV	EH29-0624 LV	EH29-0824 LV	EH29-1024 LV	
Default Battery System Voltage	12VDC					24VDC				
INVERTER OUTPUT										
Rated Power	300W	400W	500W	600W	800W	1000W	600W	800W	1000W	
Surge Rating	900VA	1200VA	1500VA	1800VA	2400VA	3000VA	1800VA	2400VA	3000VA	
Waveform	Pure sine wave									
Voltage Regulation	Battery mode: 110 or 120VAC Line mode: 95~125VAC									
Output Frequency	50Hz / 60Hz									
Inverter Frequency (Peak)	>75%						>81%			
Bypass Efficiency	>95%									
Output Transfer Time	8ms(typical) 12ms(max)									
AC INPUT										
Voltage	110/120VAC									
Selectable Voltage Range	70~140VAC ±5%									
Low battery voltage alarm	70VAC ±5%									
Low battery voltage recover	75VAC ±5%									
High battery voltage alarm	140VAC ±5%									
High battery voltage recover	135VAC ±5%									
Low Frequency Alarm	45 ±5Hz									
Low Frequency Recover	46 ±5Hz									
High Frequency Alarm	65 ±5Hz									
High Frequency Recover	64 ±5Hz									
Nominal Input Range	50Hz / 60Hz ±5Hz									
AC Auto Restart	YES									
BATTERY										
Minimum start voltage	Low Battery Voltage Cutoff+0.5V					Low Battery Voltage Cutoff+1.0V				
Low battery voltage alarm	Low Battery Voltage Cutoff+0.5V					Low Battery Voltage Cutoff+1.0V				
Low battery voltage cutoff	10-12.0VDC					20.0-24.0VDC				
High battery voltage alarm	(13.8-14.5V)+1V for 12VDC mode (*2 for 24VDC)									
AC CHARGE										
Floating Voltage	13.5-14.5VDC					27-29VDC				
Boost Voltage	13.8~14.5VDC					27.6~29VDC				
Maximum Charge Current	300W 10A	400W 10A	500W 15A	600W 20A	800W 25A	1000W 30A	600W 10A	800W 15A	1000W 15A	
BYPASS & PROTECTION										
Input Waveform	Pure sine wave									
Input Frequency	50Hz or 60Hz									
Overload Protection	>110%~125% Load fault after 60s; >125%~150% Load fault after 3s; >150% Load fault after 500ms									
Over Temperature Protection	≥90°C									
Bypass Output Protection	15A 250VAC									
Output Circuit Protection	YES									
Battery Reverse Protection	Optional									
Battery Low Voltage Protection	YES									
Battery High Voltage Protection	YES									
Bypass Breaker Rating	15A									
Maximum Bypass Current	15A									
MECHANICAL SPECIFICATION										
Machine Dimension (W*H*D)(mm)	300.5*319*132.2									
Package Dimension (W*H*D)(mm)	391*187*325									
N.W(kg)	/									
G.W(kg)	/									
GENERAL										
Operating Temperature	0°C~40°C 0~90% relative humidity (non-condensing)									
Storage Temperature	-15°C to 55°C									
Altitude	≤1000M									
Audible Noise	≤60dB									
Display	LED+LCD									
Cooling Mode	Fan cooling									
Fan Starting	>45°C starting, <30°C Closing									
Communication	USB									
Standard Warranty	2 year									
CERTIFICATION & STANDARDS										
CE-LVD (EN IEC62109-1:2010, EN IEC62109-2:2011); CE-EMC+LVD (EN6100-6-4:2007, EN6100-6-2:2005+EN IEC62109-1:2010, EN IEC62109-2:2011) IEC60950-1:2005A+1:2009+A2:2013; EN IEC62040-1:2019										

*The technical specifications of this document are subject to change without any notice

LOW FREQUENCY POWER INVERTER/CHARGER EP3000 LV2 Series


1~6KW | AC120V | WIFI | BAT-CAN

EP3000 LV2 series is very economical pure sine wave inverter, special in north & south america market, and AC charger from 35A to 70A .Solar/AC priority configurable . When solar priority , in case its charge current lower than inverter's charger from AC , AC will supplement to charge the batteries , to optimize charging. With low frequency transformer ,it enable the inverter to operate with all kinds of home appliances.




- 3 Steps charging
- MFD (multi-function display)
- Overload and short-circuit protection
- Set charging voltage/charging current.
- Battery low voltage shutdown point can be set to 10/10.5/11/11.5/12V
- Power-save mode
- Set utility priority/ Battery priority
- Set utility input wide/narrow range
- Inverter voltage can be set to 110V/115V/120V
- Inverter frequency can be set to 50/60Hz
- Set utility charging on/off switch
- Acid or Lithium Select
- WIFI monitoring function (optional)
- With BMS lithium battery communication function (CAN port)

Back panel description

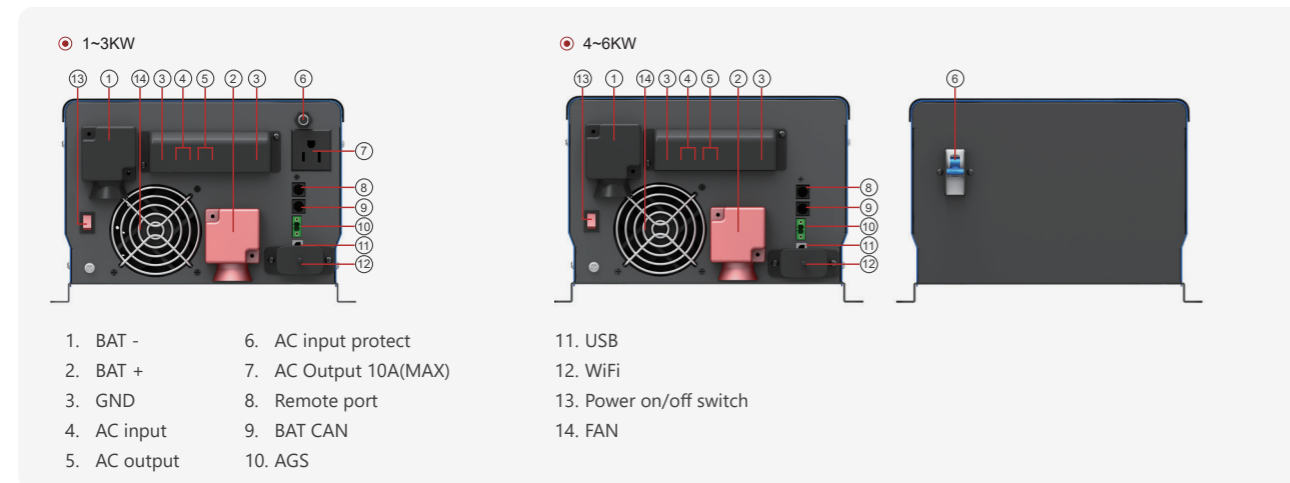

Solar system connection

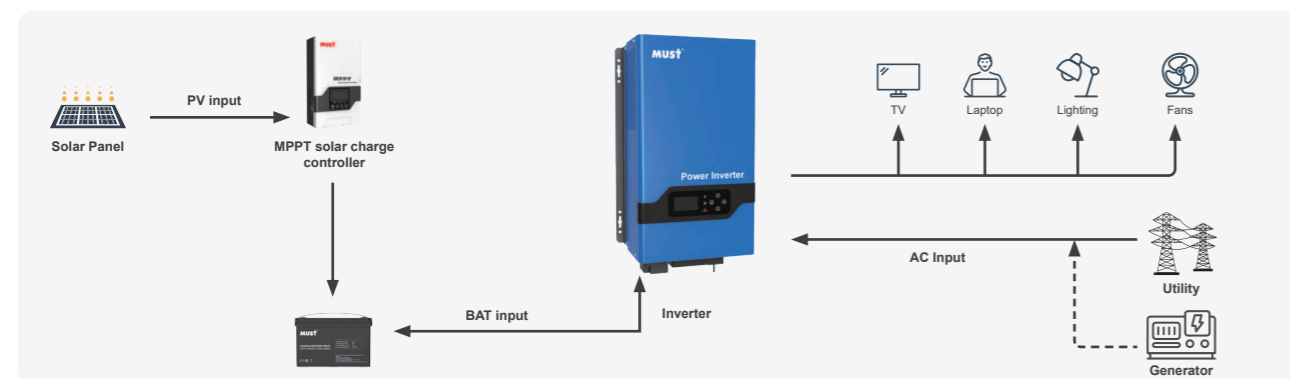


MODEL	EP30-1012 LV2	EP30-1024 LV2	EP30-1512 LV2	EP30-1524 LV2	EP30-2012 LV2	EP30-2024 LV2	EP30-3024 LV2	EP30-3048 LV2	EP30-4024 LV2	EP30-4048 LV2	EP30-5048 LV2	EP30-6048 LV2
Nominal Battery System Voltage	12VDC	24VDC	12VDC	24VDC	12VDC	24VDC	24VDC	48VDC	24VDC	48VDC	48VDC	48VDC
INVERTER OUTPUT												
Reted Power	1.0KW		1.5KW		2KW		3KW		4KW		5KW	6KW
Surge Rating	3000VA		4500VA		6000VA		9000VA		12000VA		15000VA	18000VA
Capable Of Starting Electric Motor			1HP				2HP				3HP	
Waveform	Pure sine wave/ same as input (bypass mode)											
Nominal Output Voltage RMS	110V/115V/120VAC ±10% (RMS)											
Output Frequency	50Hz / 60Hz±0.3 Hz											
Inverter Efficiency(Peak)	>88%											
Line Mode Efficiency	>95%											
Power Factor	1.0											
Typical Transfer Time	10ms(max)											
Overload	100% < Load < 110% (alarm 5min then stop output and fault code 07) 110% < Load < 125% (alarm 60s then stop output and fault code 07) Load > 125% (alarm 10s then stop output and fault code 07)											
AC INPUT												
Voltage	120VAC											
Selectable Voltage Range	75~135VAC(For Personal Computers)											
Frequency Range	50Hz/60Hz (Auto sensing) 40~80Hz											
BATTERY												
Minimum Start Voltage	(10V/ 10.5V/ 11V/ 11.5V/ 12V)+0.5V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)											
Low battery voltage alarm	(10V/ 10.5V/ 11V/ 11.5V/ 12V)+0.5V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)											
Low battery voltage cut off	10V/ 10.5V/ 11V/ 11.5V/ 12V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)											
High battery voltage alarm	(12-14.5V)+1V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)											
High battery voltage recover	(12-14.5V)+0.5V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)											
Energy saving mode	Load ≤50±20W(120V)											
CHARGER												
Output Voltage	Depends on battery type											
Charger AC Input Breaker Rating	1K/30A			3K/40A			4-6KW/63A					
Overcharge Protection S.D.	15.7VDC for 12VDC mode (*2 for 24VDC mode, *4 for 48VDC mode)											
Maximum Charge Current	30A	20A	45A	25A	60A	30A	40A	20A	60A	30A	35A	40A
BYPASS & PROTECTION												
Input Voltage Waveform	Sine wave (grid or generator)											
Nominal Input Frequency	50Hz or 60Hz											
Overload Protection (SMPS Load)	Circuit breaker											
Output Short Circuit Protection	Circuit breaker											
AC Input Breaker	30A			40A			50A / 63A					
MECHANICAL SPECIFICATIONS												
Mounting	Wall Mount											
Machine Dimension (W*H*D)(mm)	303*493*200						305*531*202					
Package Dimension (W*H*D)(mm)	615*319*400						686*319*400					
N.W(kg)	/											
G.W(kg)	/											
OTHER												
Operation Temperature Range	0°C to 40°C											
Storage Temperature	-15°C to 60°C											
Audible Noise	60dB MAX											
Display	LED+LCD											
Standard Warranty	2 year											
CERTIFICATION & STANDARDS												
/												

*The technical specifications of this document are subject to change without any notice

LOW FREQUENCY SPLIT PHASE POWER INVERTER EP3300 TLV Series


1~6KW | AC110V/220V | WIFI | BAT-CAN

This split phase inverter EP3300 TLV series, capacity from 1KW-6KW, DC 12V/24V/48V, it's applicable to 110VAC/120VAC markets demands, which matches AC 110VAC/120V single phase, or two phase 220V/240V; In LCD display, you can set output voltage, frequency, charging voltage, charging current to design best use based on different loads applications; meanwhile, you can also connect extra solar charge controller to build a solar home system, take use of sunshine freely and save electricity bills.

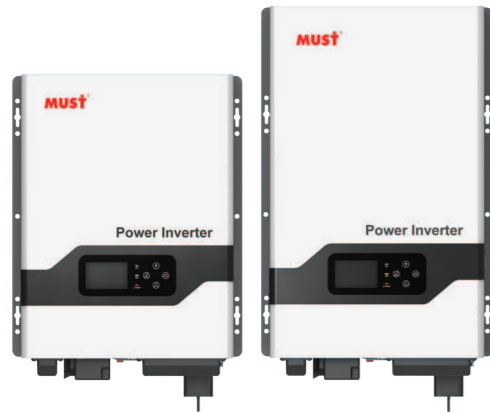


- Pure sine wave output
- 3 steps charging
- Overload and short-circuit protection
- Set charging voltage/charging current
- Power-save mode
- Battery low voltage shutdown point can be set to 10/10.5/11/11.5/12V
- Inverter voltage can be set to 100/110/120V
- Inverter frequency can be set to 50/60Hz
- Acid or Lithium select
- WIFI monitoring function (optional)
- With BMS lithium battery communication function (CAN port)

Back panel description

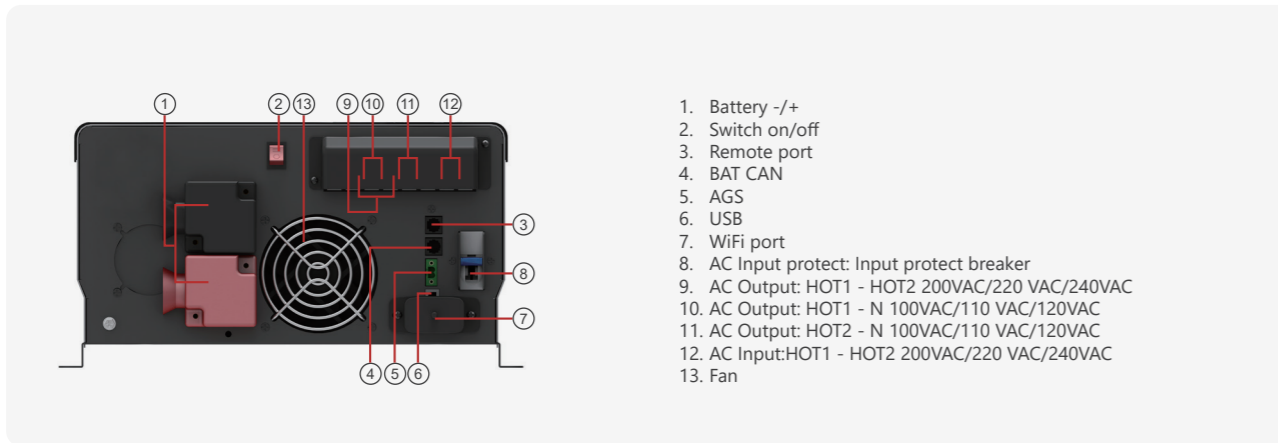

Solar system connection

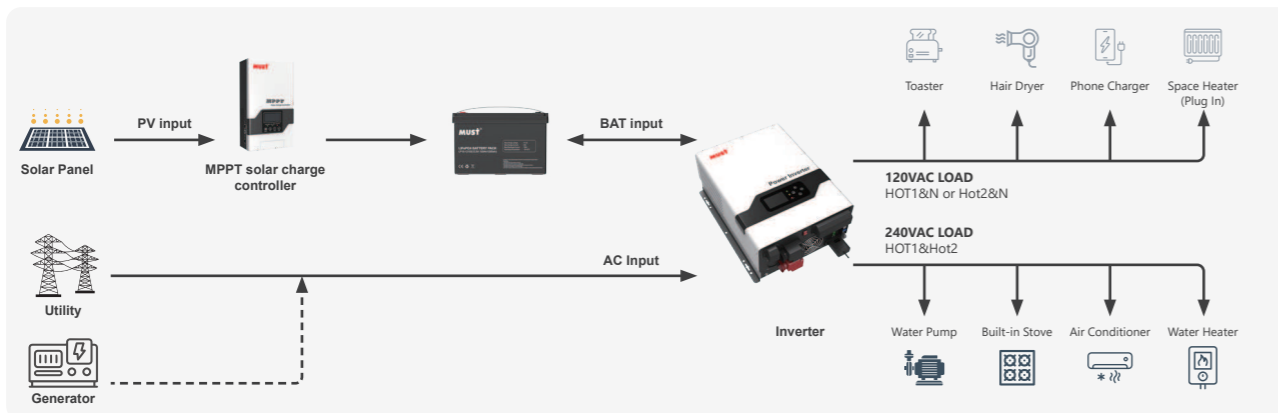

MODEL	EP33-1012 TLV	EP33-1024 TLV	EP33-1512 TLV	EP33-1524 TLV	EP33-2012 TLV	EP33-2024 TLV	EP33-3024 TLV	EP33-3048 TLV	EP33-4024 TLV	EP33-4048 TLV	EP33-5048 TLV	EP33-6048 TLV
INVERTER OUTPUT												
Rated power	1KW	1.5KW	2KW	3KW	4KW	5KW	6KW					
Surge rating	3000VA	4500VA	6000VA	9000VA	12000VA	15000VA	18000VA					
Capable of starting electric motor	1P	1P	1.5P	1.5P	2P	3P						
Power factor	1											
Wave form	Pure sine wave / Same as input wave form (bypass mode)											
Output voltage RMS	100V / 110V / 120VAC (200V / 220V / 240VAC) ±10%											
Output frequency	50Hz or 60Hz (±0.3Hz) (can be set)											
Overload protection	Breaker + software protection											
Output short circuit	Breaker + software protection											
Inverter efficiency (peak)	>85%											

Overload

- 100% < Load < 110% (alarm 5min then stop output and fault code 07)
- 110% < Load < 125% (alarm 60s then stop output and fault code 07)
- Load > 125% (alarm 10s then stop output and fault code 07)

BATTERY			
Battery voltage	12VDC / 24VDC	24VDC / 48VDC	48VDC
Minimum start voltage	(10V/ 10.5V/ 11V/ 11.5V/ 12V)+0.5V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)		
Low battery voltage cut off	10V/ 10.5V/ 11V/ 11.5V/ 12V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)		
Low battery voltage alarm	(10V/ 10.5V/ 11V/ 11.5V/ 12V)+0.5V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)		
High battery voltage alarm	(12-14.5V)+1V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)		
High Battery Voltage Recover	(12-14.5V)+0.5V for 12VDC mode (*2 for 24VDC, *4 for 48VDC)		
Save mode	Load ≤50±20W(120V)/100±20W(220V)		

AC INPUT MODE	
Input waveform	Pure sine wave
Nominal input voltage	200Vac / 220Vac / 240Vac
Max input voltage	270Vac MAX
Input frequency	50Hz / 60Hz (auto sensing)
Efficiency (AC mode)	>95% (load, full battery)
Transfer time AC to DC	15ms(max)
Transfer time DC to AC	15ms(max)

CHARGE MODE							
Boost voltage	14.1V(Default) Range of adjustment 12-14.5V / *2 for 24VDC / *4 for 48VDC (Regulation step 0.1V)						
Float voltage	13.5V(Default) Range of adjustment 12-14.5V / *2 for 24VDC / *4 for 48VDC (Regulation step 0.1V)						
12V	30A	45A	60A	/	/	/	/
24V	20A	25A	30A	40A	60A	/	/
48V	/	/	/	20A	30A	35A	40A

Min charge current 10A. Change by every 5A

MECHANICAL SPECIFICATIONS	
Machine Dimension (W*H*D)(mm)	359.2*443*188
Package Dimension (W*H*D)(mm)	598*308*457
N.W(kg)	/
G.W(kg)	/
Standard Warranty	1 year (standard), 2 years optional (IP20)

CERTIFICATION & STANDARDS

/

*The technical specifications of this document are subject to change without any notice

SPLIT-PHASE HYBRID SOLAR INVERTER PH1100 US Series

5~10KW | Split Phase | AC 120V/240V | IP66

PH1100 US is brand new split phase hybrid inverter with low battery voltage 48V, ensuring system safe and reliable. With compact design and high-power density, this series supports 1.3 DC/AC ratio, saving device investment. It's applicable to 110VAC/120VAC markets demands, which matches AC 110VAC/120V single phase, or two phase 220V/240V; Equipped with CAN port (x2) BMS and parallel, x1 RS485 port for BMS, x1 RS232 port for remotely control, x1 DRM port, which makes the system smart and flexible.




- 100% unbalanced output, each phase max. output up to 50% rated power
- Max. 6 pcs parallel for on-grid and off-grid operation
- AC couple to retrofit existing solar system
- Support multiple batteries parallel
- Max. charging/discharging current of 220A
- Support storing energy from diesel generator
- 48V low voltage battery, transformer isolation design
- IP66 water-proof and dust-proof
- "Time of use" function: a maximum of 6 time segments can be set
- Wifi monitoring

Back panel description

1. DC switch
2. Battery input connectors
3. BTS terminals, BMS terminals, load monitor terminals, dry contact terminals, CAN communication terminals, USB terminal and cover
4. Circuit breaker of Grid
5. Load
6. Generator input
7. WiFi Interface
8. Ground
9. PV input with two MPPT

Solar system connection

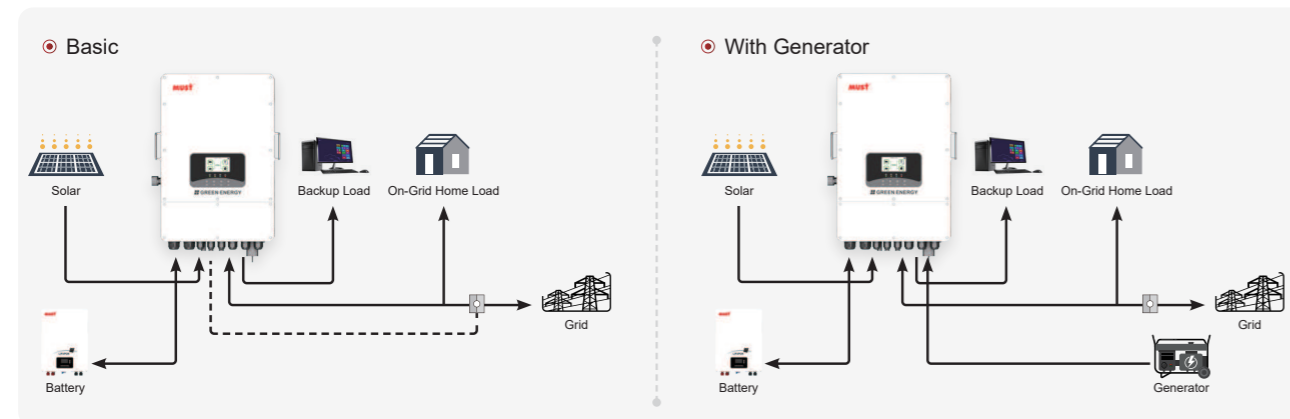

MODEL	PH11-5KL2-US	PH11-6KL2-US	PH11-8KL2-US	PH11-10KL2-US
Rated power	5000W	6000W	8000W	10000W
BATTERY INPUT DATA				
Battery type	Lead-acid battery / Lithium battery			
Battery voltage	48V			
Battery voltage range	40~64V			
Charging curve	3-stage adaptive with maintenance/Equalization			
Charging Strategy for Li-Ion Battery	Self-adaption to BMS			
Over-current protection/ Over-temperature protection	Yes / Yes			
Maximum charging/discharging power	5000W	6000W	8000W	10000W
Maximum charging/discharging current	110A	130A	170A	220A
PV STRING INPUT DATA				
Max. DC Input Power	6500W	7800W	10400W	13000W
Maximum DC voltage	600V			
Start-up Voltage	125V			
Full Load DC Voltage Range	150~500V			
Rated PV Input Voltage	370V			
Minimum voltage for grid connection	150V			
Enter high voltage error recovery point	600V			
Maximum input current	16A/16A	16A/16A	32A/16A	32A/16A
No.of MPP Trackers	2	2	2	2
Input terminal type	H4/MC4			
AC INPUT/OUTPUT DATA				
Rated AC Input/ Output Power	5000W	6000W	8000W	10000W
Max AC Input/ Output Power	5000W	6000W	8000W	10000W
AC Input/ Output Rated Current	20.8A/19.2A	25A/23A	33.3A/30.7A	41.6A/38.4A
Rated Input/Output Voltage/Range	120V/240V:208V			
Rated Input/Output Grid Frequency/Range	60Hz±5Hz/ 50Hz±5Hz			
Rated output power factor	1			
Power Factor Adjustment Range	0.8 leading to 0.8 lagging			
Total Harmonics Current Distortion (THDi)	<3%			
Grid Type	Split Phase			
DC Current Injection	<0.5%			
EFFICIENCY				
Max. Efficiency	97.5%			
Euro Efficiency	96.5%			
MPPT Efficiency	99.5%			
PROTECTION				
Integrated	Islanding protection, Output overcurrent protection, Output overvoltage protection, PV input polarity reverse protection, DC Switch (optional), Ground Fault Sensing, leakage current monitoringprotection			
Surge Protection	DC Type III/AC Type III			
Overvoltage Category	DC Type II/AC Type III			
GENERAL DATA				
Operating Temperature Range (°C)	-25°C~+60°C, >45°C Derating			
Cooling	Fan cooling			
Noise (dB)	≤50dB			
Altitude	3000m, >3000mDerating			
Topology	Battery-side transformer isolation, PV-side non-transformer isolation			
Communication	USB/ WiFi/ Ethernet(optional)			
Display	4.3-inch touch screen			
Protection Degree	IP66			
Installation Style	Wall-mounted			
MECHANICAL SPECIFICATIONS				
Machine Dimension (W*H*D)(mm)	446*692*260 (excluding connectors and racks)			
Package Dimension (W*H*D)(mm)	816*404*567			
N.W(kg)	38			
G.W(kg)	42			
Warranty	5 Year the Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy			
CERTIFICATION & STANDARDS				
NBT32004-2013				

*The technical specifications of this document are subject to change without any notice

ON/OFF GRID HYBRID SOLAR INVERTER PH1100 LV Series

3.6~4KW | Single Phase | 120VAC | IP66




This is a flexible and intelligent energy storage solar inverter with a wide range of MPPT Voltage. Combining functions of off grid and on grid. This hybrid solar inverter can power all kinds of appliances in home or office, and can also be used in power stations.




- Multiple operation modes: Grid-tie, off grid with storage backup
- IP65 water-proof and dust-proof
- MPPT voltage range 120-500V
- Support LCD display & Smart LCD setting
- Available Export control CT sensor function
- Multiple communications: USB, RS485, GPRS and wifi etc
- Full protection function: Over-voltage, over-frequency, over-current, over-temperature, and AC short-circuit automatic protection
- Intelligent BMS battery management function
- Fanless low-noise design
- Wifi monitoring

Back panel description

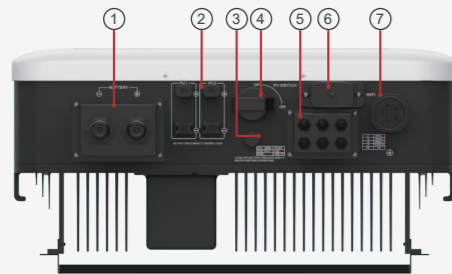

1. Battery input terminals and cover
2. PV input terminals
3. Breather valve
4. PV input switch
5. BTS terminals, BMS terminals, load monitor terminals, dry contact terminals, CAN communication terminals, USB terminal and cover
6. Wi-Fi com module
7. AC input & output terminals and cover

Solar system connection

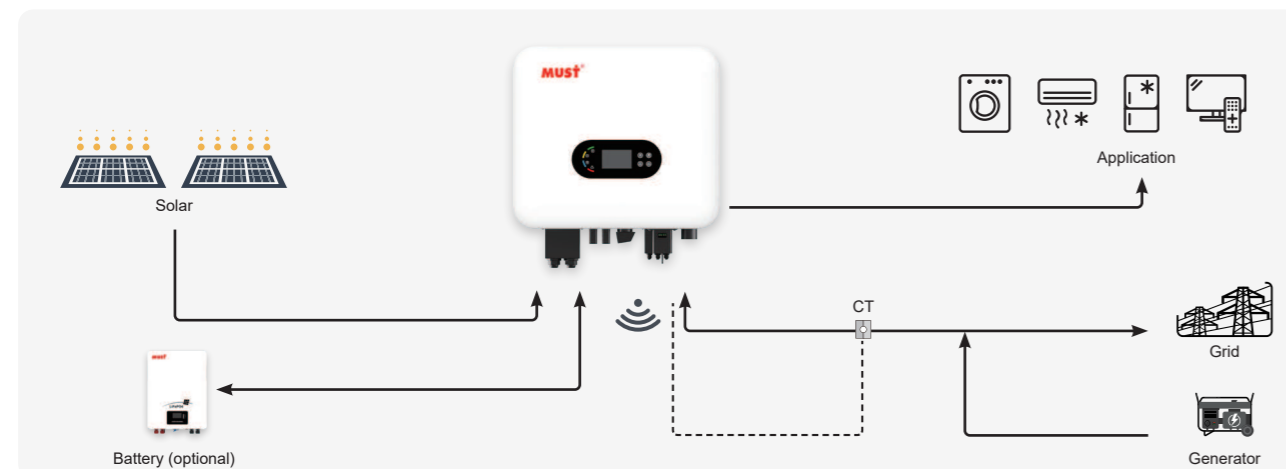

MODEL	PH11-3648 LV	PH11-4048 LV
Rated Power	3600W	4000W
Nominal Battery System Voltage	48V	
PV INPUT(DC)		
Maximum recommended DC power	4700W	5200W
Nominal DC operating voltage	360V	
Maximum DC voltage	500V	
MPPT voltage range	120V~500V	
Maximum input current	15A / 15A	
No. of MPP tracker	2	
Strings per MPP tracker	1	
INVERTER INPUT/ OUTPUT(AC)		
Nominal AC input/ output power	3600W	4000W
Nominal input/ output voltage; range	110/120/130V; 90~140V	
AC grid frequency; range	50/60Hz; 45~55/55-65Hz	
Nominal input/ output current	30A	34A
Maximum input/ output current	33A	36A
Inrush current (spike/duration)	72A/5.2us	
Total harmonic distortion i(THDi)	<3%	
Power factor at rated power	1	
Displacement power factor	0.8leading ~ 0.8lagging	
Grid type	Single phase	
BATTERY MODE OUTPUT(AC)		
Output Rated Power	3600W	4000W
Nominal output voltage; accuracy range	120±1%	
Output frequency; accuracy range	50/60Hz (optional)±0.2%	
Output rated current	30A	34A
Output waveform	Pure sine wave	
Peak power	5400W,10s	6000W,10s
Total harmonic distortion v (linear load)	<3%	
BATTERY & CHARGER		
Battery type	Lead-acid battery / Lithium battery	
Battery voltage	48V	
Battery voltage range	40~60V	
Charging curve	3-stage adaptive with maintenance	
Protection	Over-current protection / Over-temperature protection	
Maximum charging power	3600W	4000W
Maximum charging current	75A	85A
EFFICIENCY		
Maximum efficiency	97.1%	
Euro-efficiency	96.5%	
MPPT efficiency	99.8%	
PROTECTION DEVICES		
DC switch rating for each MPPT; Grid monitoring; Output over current protection; Output overvoltage protection-varistor; Ground fault monitoring; Integrated all-pole sensitive leakage current		
MECHANICAL SPECIFICATIONS		
Machine Dimension (W*H*D)(mm)	420*480*215	
Package Dimension (W*H*D)(mm)	610*324*595	
N.W(kg)	30	
G.W(kg)	32	
GENERAL		
DC connection	H4 / MC4	
AC connection	Terminal Block	
Display	LED+LCD	
Communication interfaces	Wi-Fi / USB / GPRS / RS485	
Ingress protection rating	IP66	
Humidity	0~95% RH (No condensing)	
Operating temperature range	-25°C+60°C With derating above 45°C	
Cooling concept	Natural	
Altitude	<3000m	
Standard Warranty	5 year	
CERTIFICATION & STANDARDS		
CE-EMC+LVD (EN6100-6-3: 2007, EN6100-6-1:2017+EN IEC62109-1:2010, EN IEC62109-2:2011); CE-LVD(EN62477-1:2022) IEC60529; EN50549-1:2019; Poland Type A, (NC RfG:2016, PSE:2018, PTPIREE:2021) C10/C11; UNE217001-2020; UNE217002-2020, NTS-631:2021 (Type A); G98+G99		

*The technical specifications of this document are subject to change without any notice

AC-COUPLED ENERGY STORAGE INVERTER PH1600 LV Series


3~4KW | Single Phase | 120VAC

The PH1600 LV Series is designed for retrofitting PV systems, including power classes ranging from 3kw to 4kw. It can be installed with existing PV inverters, forming an AC coupling system. Capable of being grid-interactive, it allows users to store surplus power and sell it back to the grid when demand peaks and the price of electricity is at its highest. It runs reliably under even the most extreme conditions with metal aluminium housing with IP66 protection.




- LCD+LED – user friendly interface
- IP66 design for outdoor
- Compatible with other brands of inverter
- Various work mode for different application scenarios
- Natural cooling without external fan
- BMS Function
- Wifi monitoring
- UPS level switching time <10 ms
- Retrofit any on-grid systems to be able to run battery

Back panel description

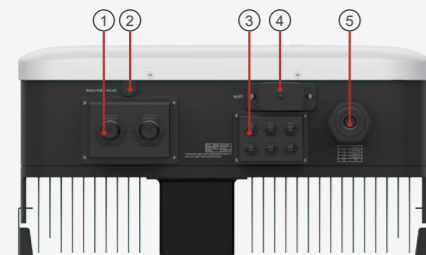

1. Battery input terminals and cover
2. Breather valve
3. BTS terminals, BMS terminals, load monitor terminals, dry contact terminals, CAN communication terminals, USB terminal and cover
4. Wi-Fi commodule
5. AC output terminals and cover

Solar system connection

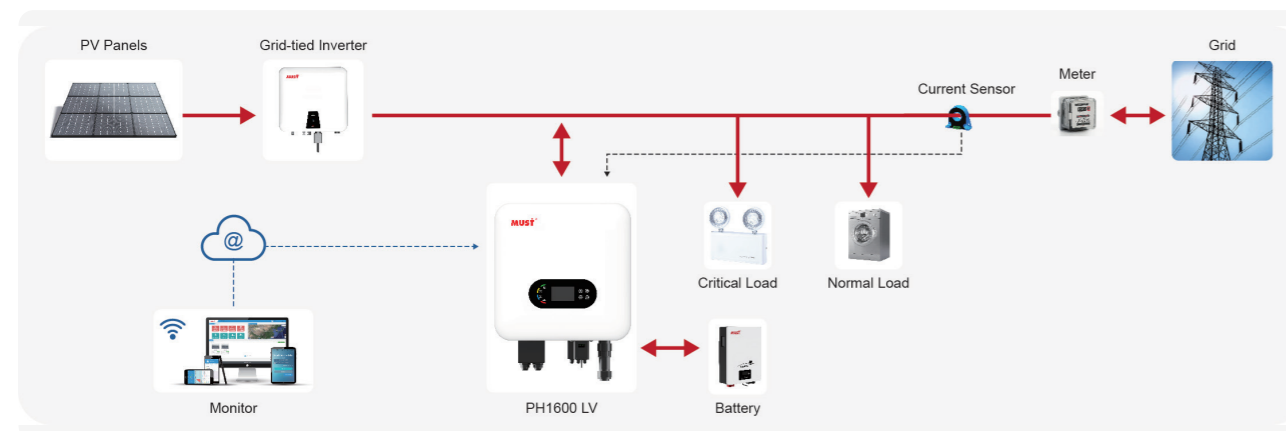

MODEL	PH16-3048 LV	PH16-3548 LV	PH16-4048 LV
Rated Power	3000W	3500W	4000W
Nominal Battery System Voltage	48V	48V	48V
INVERTER OUTPUT(AC)			
Nominal AC output power	3000W	3500W	4000W
Nominal output voltage range	110/120,90~140 ±5VAC		
AC grid frequency range	60Hz; 55-65Hz		
Nominal output current	25A	29.1A	33.3A
Maximum output current	36.36A		
Inrush current (spike/duration)	57.5A/5.2us		
Total harmonic distortion i(THDi) @Nominal Output	<3%		
Power factor at rated power	≈1		
Displacement power factor	Adjustable from 0.8 leading to 0.8 lagging		
Grid type	Single phase		
BATTERY MODE OUTPUT(AC)			
Output Rated Power	3000W	3500W	4000W
Nominal output voltage; accuracy range	120±1%		
Output frequency; accuracy range	60Hz±0.2%		
Output rated current	25A	29.1A	33.3A
Output waveform	Pure sine wave		
Peak power	3000VA, 10S	3500VA, 10S	4000VA, 10S
Total harmonic distortion v (linear load)	<3%		
BATTERY & CHARGER			
Battery type	Lead-acid battery / Lithium battery		
Battery voltage	48V ±0.3		
Battery voltage range	40~60V ±0.3		
Charging curve	3-stage adaptive with maintenance		
Protection	Over-current protection / Over-temperature protection		
Maximum charging power	3000W	3500W	4000W
Maximum charging current	80A		
EFFICIENCY			
Battery discharge (full load)	≥92%		
Maximum battery charging current efficiency	≥92%		
PROTECTION DEVICES			
Grid monitoring	Yes		
Output over current protection	Yes		
Output overvoltage protection-varistor	Yes		
Ground fault monitoring	Yes		
Integrated all-pole sensitive leakage current	Yes		
MECHANICAL SPECIFICATIONS			
Machine Dimension (W*H*D)(mm)	420*420*215		
Package Dimension (W*H*D)(mm)	/		
N.W(kg)	25		
G.W(kg)	/		
GENERAL			
AC connection	Terminal Block		
Display	LED+LCD		
Communication interfaces	Wi-Fi/USB/GPRS/RS485/CAN		
Ingress protection rating	IP66		
Humidity	0~95% RH(No condensing)		
Operating temperature range	-20°C+60°C With derating above 45°C		
Cooling concept	Natural		
Noise figure [dB]	≤25		
Altitude	<3000m		
Standard Warranty	5years		
CERTIFICATION & STANDARDS			
CE-EMC+LVD (EN IEC61000-6-3, ENIEC61000-6-1; EN IEC62477-1)			

*The technical specifications of this document are subject to change without any notice

ON GRID SOLAR INVERTER PH5900 TML Series


10~12KW | Three-phase | 133V/230VAC | IP66

PH5900 TML series PV inverters fully considers the needs of end customers. It is used to convert the DC generated by photovoltaic panels into AC, which is sent to the grid in a three-phase mode. The product has excellent performance. The LED is used for the status display of inverter, which can effectively improve product life. Using high precision DSP digital control, could afford wide sampling range, to achieve the significance of all-directional protection. High quality IP66 structural model, which maximizes the benefits of the product and improve the reliability of the product.



- Wide MPPT voltage range from 200V-800V
- IP66 protection degree
- Integrated DC switch
- DSP controller
- The maximum efficiency is 98.6%
- Multi MPPT controller
- WIFI monitoring standard
- Easy installation


Back panel description

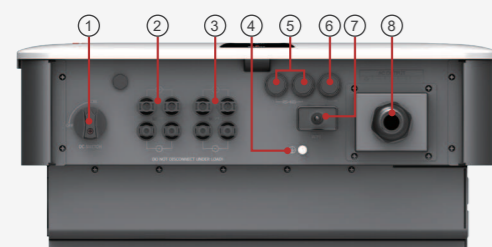

1. DC switch
2. MPPT1
3. MPPT2
4. Ground
5. RS-485 connector
6. CT/Meter port
7. WIFI connector
8. AC output

Solar system connection

Basic

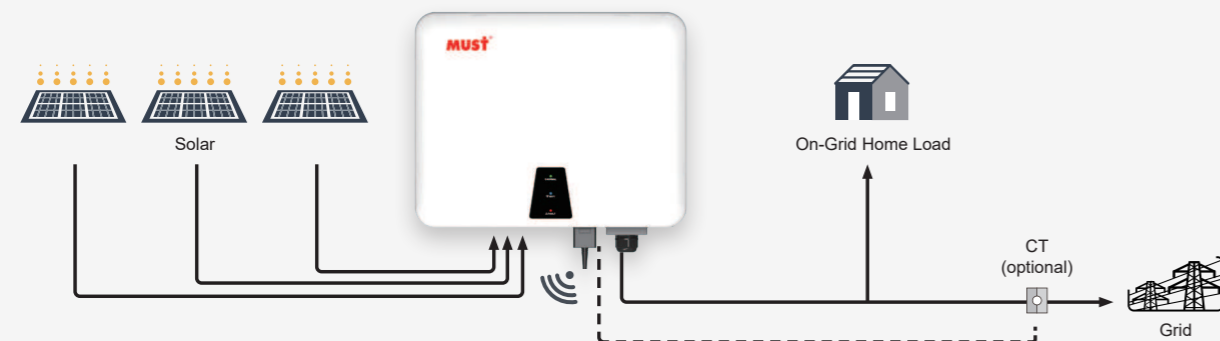

MODEL	PH59-10000 TML	PH59-11000 TML	PH59-12000 TML
Rated AC output power	10000W	11000W	12000W
OUTPUT (AC)			
Max.AC apparent power	11000W	12100W	13200W
Max.output current	27.5A	30.3A	33A
Nominal AC Voltage(L-N/L-L)	133V/230V		
AC grid frequency range	50/60Hz±5Hz		
Power factor at Rated power	>0.99		
Adjustable displacement power factor	0.8leading...0.8lagging		
Total harmonic distortion (THDi)	< 3%		
AC grid connection type	3W+N+PE		
INPUT DATA			
Max.recommended PV power	13000W	14300W	15600W
Max.DC voltage	800V		
Start voltage	250V		
Nominal voltage	360V		
MPPT voltage range	200V-800V		
Max. short-circuit current	32.5A/32.5A		
Max.input current	26A/26A		
Number of independent MPP trackers / strings per MPP tracker	2/2	2/2	2/2
DC connection	H4 / MC4		
EFFICIENCY			
Max. efficiency	98.6%		
Euro weighted efficiency	98.3%		
MPPT efficiency	99.5%		
Protection devices	Island protection, DC reverse polarity protection , Output over current protection, Output overvoltage protection-varistor, Integrated DC switch, Ground fault monitoring, Integrated all-pole sensitive leakage current monitoring unit, DC Surge protection, AC Surge protection		
GENERAL DATA FEATURES			
Machine Dimension (W*H*D)(mm)	540*426*234		
Package Dimension (W*H*D)(mm)	650*338*542		
N.W(kg)	28.6		
G.W(kg)	32.5		
Operation temperature range	-25°C- +60°C with derating above 45°C		
Noise emission(typical)	≤40dB(A)		
Altitude	3000m		
Self-consumption (night)	< 1W		
Topology	Transformerless		
Cooling	Smart air cooling		
Environmental protection Rating	IP66		
Relative humidity	0~100%		
FEATURES			
AC connection	Cable gland + OT terminal		
Display	LED		
Communication interfaces	WIFI/RS485/GPRS(opt)		
Warranty	Standard 5 years / 10 years (opt.)		
CERTIFICATION & STANDARDS			
UL1741			

*The technical specifications of this document are subject to change without any notice

HIGH FREQUENCY ON/OFF GRID SOLAR INVERTER PH1800 LV Series




3~6KW | 120V | Wifi


PH1800 LV Series is a multi-function inverter/charger, combining functions of inverter, MPPT solar charger and battery charger to offer uninterrupted power support with portable size. Its comprehensive LCD display offers user-configurable and easy-accessible button operation such as battery charging current, AC/solar charger priority, and acceptable input voltage based on different applications.

- Pure sine wave solar inverter
- Output power factor 1
- Built-in 80A MPPT solar charger
- 2 units can be wired in parallel to create a split-phase system with 120V and 240V capabilities
- Support parallel operation up to 3 units
- WIFI remote monitoring (optional)
- CAN/RS485 communication for BMS
- Compatible to generator

Back panel description

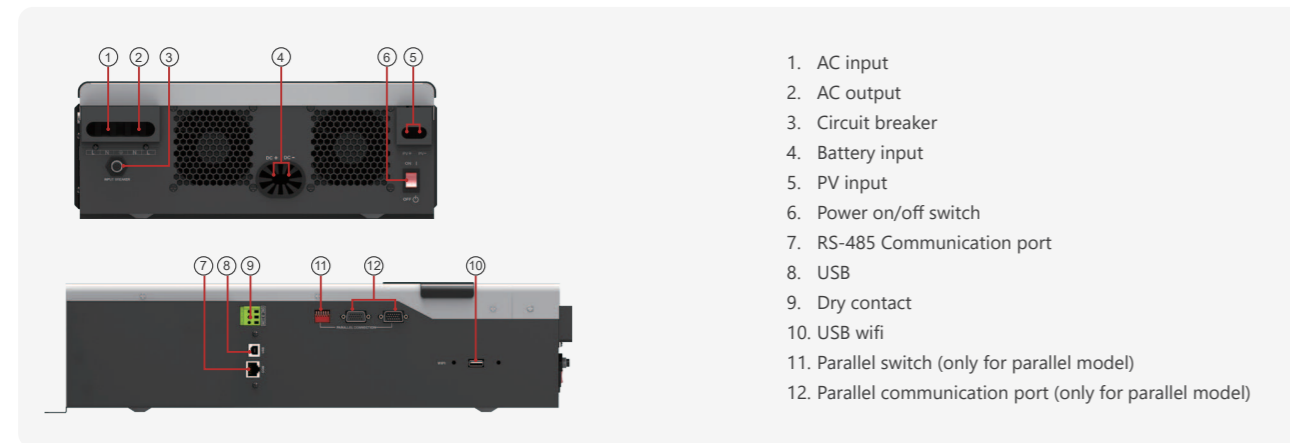

Solar system connection

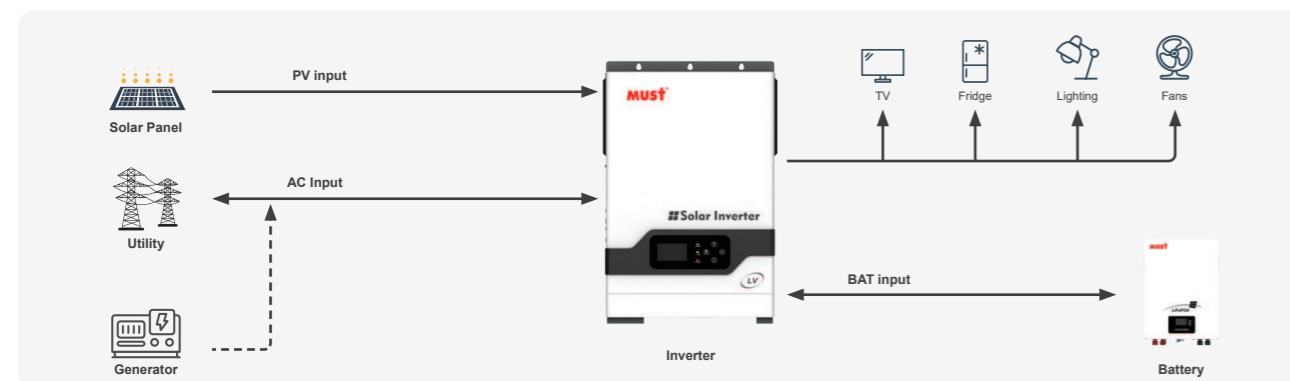

MODEL	PH18-3024 LV	PH18-3048 LV	PH18-6048 LV
Nominal Battery System Voltage	24VDC	48VDC	
INVERTER OUTPUT			
Rated Power	3000W	3000W	6000W
Surge Power	6000W	6000W	12000W
Waveform	Pure sine wave		
AC Voltage Regulation (Batt.Mode)	120VAC ±5%	120VAC ±5%	240VAC ±5% (L-L)
Inverter Efficiency(Peak)	90%		
Transfer Time	10ms (UPS / UL) 20ms (APL)		
AC INPUT			
Voltage	120VAC	120VAC	240VAC
Selectable Voltage Range	107~132VAC(UL)		214~264VAC(UL)
Frequency Range	50Hz / 60Hz(Auto sensing)		
BATTERY			
Normal voltage	24VDC	48VDC	48VDC
Floating Charge Voltage	27.4VDC	54.8VDC	54.8VDC
Overcharge Protection	30VDC	60VDC	60VDC
SOLAR CHARGER & AC CHARGER			
Maximum PV Array Open Circuit Voltage	450VDC	250VDC	250VDC
Maximum Solar Charge Current	100A	80A	80A/ 80A
PV Array MPPT Voltage Range	90-430VDC	60-200VDC	60-200VDC
PV Input Power	4000W	4000W	4000W/ 4000W
Maximum Efficiency	98%		
Maximum AC Charge Current	80A	60A	60A
Maximum Charge Current	100A	140A	160A
MECHANICAL SPECIFICATIONS			
Machine Dimension (W*H*D)(mm)	329*485*134	329*485*134	315*500*235
Package Dimension (W*H*D)(mm)	575*229*425	575*229*425	/
N.W(kg)	12	12	20
G.W(kg)	13.5	13.5	22
OTHER			
Humidity	5% to 95% Relative humidity (Non-condensing)		
Operating Temperature	-10°C~50°C		
Storage Temperature	-15°C~60°C		
Standard Warranty	2years		
CERTIFICATION & STANDARDS			
////////////////////			

*The technical specifications of this document are subject to change without any notice

HIGH FREQUENCY ON/OFF GRID HYBRID SOLAR INVERTER PH1800 TLV Series

6KW | 120V,240V | Wifi


This split phase solar inverter PH1800 TLV series, capacity 6KW, DC 48V, it's applicable to 110VAC/120VAC markets demands, which has AC output of single phase 110VAC/120V, split phase 220V/240V; In LCD display, you can set output voltage, frequency, charging voltage, charging current to design best use based on different loads applications; meanwhile, it has built-in two 80A MPPT solar charge controllers, you can take use of sunshine freely and save electricity bills.




- Pure sine wave solar inverter
- Output power factor 1
- Built-in two 80A MPPT solar charge controllers
- WIFI remote monitoring (optional)
- Acid or Lithium Battery Select
- CAN/RS485 communication for BMS
- Compatible to generator



Back panel description

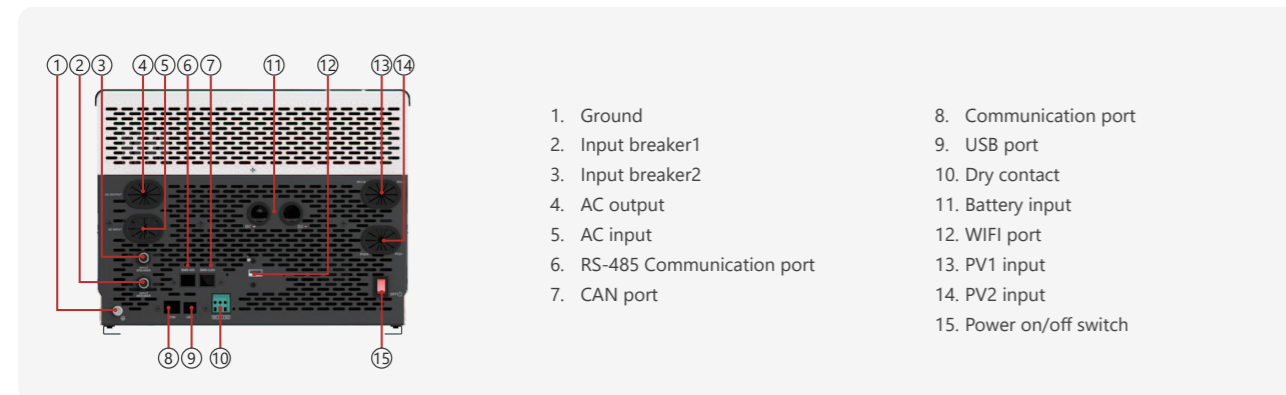

Solar system connection

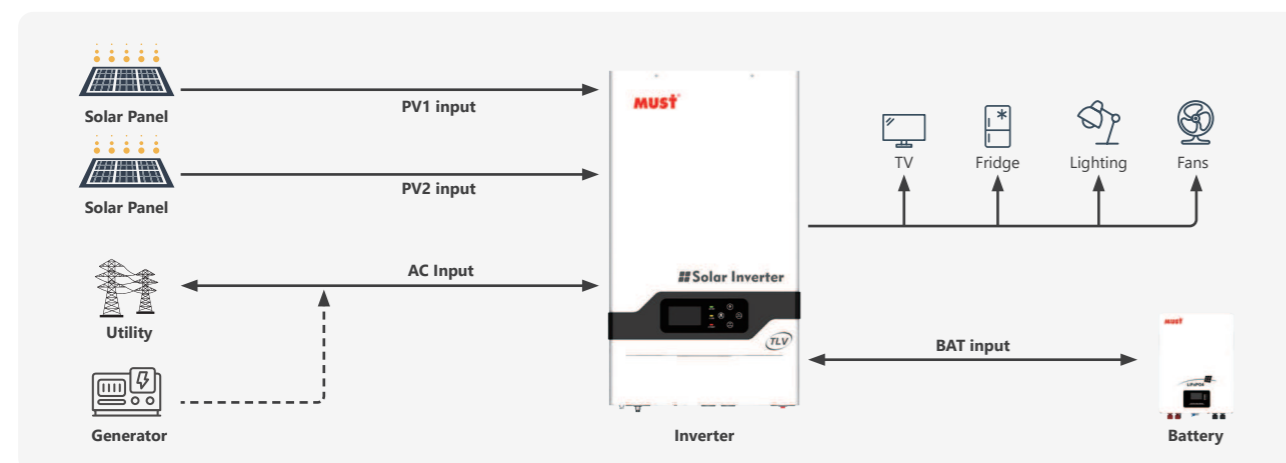

MODEL	PH18-6048 TLV
Nominal Battery System Voltage	48VDC
INVERTER OUTPUT	
Rated Power	6000W
Surge Power	12000VA
Waveform	Pure sine wave
AC Voltage Regulation (Batt.Mode)	120VAC/240VAC (L1/L2)
Inverter Efficiency(Peak)	90%~93%
Transfer Time	10ms (UPS / UL) 20ms (APL)
AC INPUT	
Voltage	240VAC (L1/L2/N)
Selectable Voltage Range	214~264VAC(UL)
Frequency Range	50Hz / 60Hz(Auto sensing)
BATTERY	
Normal voltage	48VDC
Floating Charge Voltage	54.8VDC
Overcharge Protection	60VDC
SOLAR CHARGER & AC CHARGER	
Maximum PV Array Open Circuit Voltage	250V
Maximum Solar Charge Current	80A/80A
PV Array MPPT Voltage Range	60~200VDC
PV Input Power	4000W/4000W
Maximum Efficiency	98%
Maximum AC Charge Current	60A/60A
Maximum Charge Current	280A
MECHANICAL SPECIFICATIONS	
Machine Dimension (W*H*D)(mm)	318*560*249
Package Dimension (W*H*D)(mm)	678*345*420
N.W(kg)	21.5
G.W(kg)	24
OTHER	
Humidity	5% to 95% Relative humidity (Non-condensing)
Operating Temperature	-10°C~50°C
Storage Temperature	-15°C~60°C
Standard Warranty	2 year
CERTIFICATION & STANDARDS	
CE-LVD (IEC62109-1, EN IEC62109-2); UKCA-(BS EN 62109-1, BS EN 62109-2)	

*The technical specifications of this document are subject to change without any notice

PURE SINE WAVE INVERTER PI1500 LV Series


300~2000W | 12V,24V | 120V

PI1500 series is a pure sine wave inverter, high frequency machine solution, the product is small size, the solution is reliable and stable, the main function is to invert the DC 12VDC battery or 24VDC battery to AC 120VAC output, mainly used for emergency use Electricity, car inverter, outdoor electricity and other occasions.



- Input Voltage 12V / 24V DC optional
- Output Voltage 120V AC optional
- Portable power for AC products, AC outlets for connecting multiple loads
- High efficiency converts virtually all of the battery's power to AC
- Mounting brackets for convenient installation
- Overload and over temperature shut down
- Low voltage and over voltage alarm/cut off
- Short circuit protection

Solar system connection

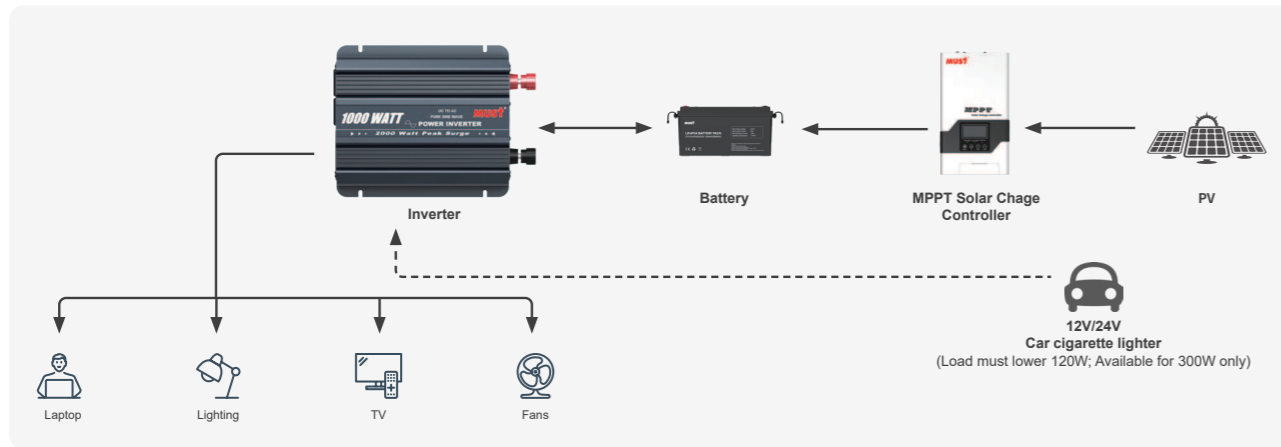

Type



MODEL	PI15-0312 LV	PI15-0324 LV	PI15-0612 LV	PI15-0624 LV	PI15-1012 LV	PI15-1024 LV	PI15-1512 LV	PI15-1524 LV	PI15-2012 LV	PI15-2024 LV
BATTERY DC INPUT										
Input Voltage	12VDC	24VDC	12VDC	24VDC	12VDC	24VDC	12VDC	24VDC	12VDC	24VDC
Low Voltage Protect Delay	2 seconds									
Low Voltage Warning	(PB)	10.5VDC	21.0VDC	10.5VDC	21.0VDC	10.5VDC	21.0VDC	10.5VDC	21.0VDC	10.5VDC
	(LI)	10.5VDC	21.0VDC	11.6VDC	23.2VDC	11.6VDC	23.2VDC	11.6VDC	23.2VDC	11.6VDC
Low Voltage Protect	(PB)	11.5VDC	23.0VDC	11.5VDC	23.0VDC	11.5VDC	23.0VDC	11.5VDC	23.0VDC	11.5VDC
	(LI)	11.5VDC	23.0VDC	12.0VDC	24.0VDC	12.0VDC	24.0VDC	12.0VDC	24.0VDC	12.0VDC
Low Voltage Restoring	(PB)	12.5VDC	25.0VDC	12.5VDC	25.0VDC	12.5VDC	25.0VDC	12.5VDC	23.0VDC	12.5VDC
	(LI)	12.5VDC	25.0VDC	12.8VDC	25.6VDC	12.8VDC	25.6VDC	12.8VDC	25.6VDC	12.8VDC
Over Voltage Protect	(PB)	14.7VDC	29.4VDC	14.7VDC	29.4VDC	14.7VDC	29.4VDC	14.7VDC	29.4VDC	14.7VDC
	(LI)	14.7VDC	29.4VDC	14.5VDC	29.0VDC	14.5VDC	29.0VDC	14.5VDC	29.0VDC	14.5VDC
Over Voltage Restoring	(PB)	15.0VDC	30.0VDC	15.0VDC	30.0VDC	15.0VDC	30.0VDC	15.0VDC	30.0VDC	15.0VDC
	(LI)	15.0VDC	30.0VDC	14.8VDC	29.6VDC	14.8VDC	29.6VDC	14.8VDC	29.6VDC	14.8VDC

Parameters: (PB) Lead-acid Battery / (LI) 4 series (12V), 8 series (24V) LiFePO4 Lithium Battery Pack

INVERTER AC OUTPUT					
Default Power	300W	600W	1000W	1500W	2000W
Peak Power	600W	1200W	2000W	3000W	4000W
Output AC Voltage	120V	120V	120V	120V	120V
Output AC Frequency	60Hz	60Hz	60Hz	60Hz	60Hz
Output Wave	Pure Sine Wave				
Output Wave THD	< 3%				

PROTECTION	
Battery Input Protection	Low Voltage Protection, Over Voltage Protection, Reverse Protection
Inverter Output Protection	Output Overload, Short-Circuit, Over Temperature Protection

DISPLAY	
LED Display	Red: Error ; Green: System OK
LED Digital Display	/ Display Battery Voltage, Output Power, Output Voltage, Error Numbers

DC OUTPUT	
USB	USB-A type (5V1A)

EFFICIENCY								
Peak Conversion efficiency	91%	91%	90%	88%	90%	88%	90%	

MECHANICAL SPECIFICATIONS				
Machine Dimension (W*H*D)(mm)	205*125*61	242*158*81	291*220*83	380.8*248*90
Package Dimension (W*H*D)(mm)	228*102*176	268*140*205	330*147*267	420*150*300
N.W(kg)	1	1.7	2.6	4.5
G.W(kg)	9.3 (8pcs)	15 (8pcs)	23 (8pcs)	19 (4pcs)

OTHER										
Protection Degree	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20
Working Environment	Indoor Fan cooling									
Environmental temperature	0~45°C									
Ambient humidity	20%-90%, No condensation									
Altitude	≤3000m									
Standard Warranty	2 year									

CERTIFICATION & STANDARDS	
CE-EMC+LVD (EN6100-6-3, EN6100-6-1+EN IEC62109-1, EN IEC62109-2)	
CE-LVD(EN 62477-1/A11)	

*The technical specifications of this document are subject to change without any notice

MPPT SOLAR CHARGE CONTROLLER PC1800F Series

60~100A | 12V,24V,36V,48V | 145V


MPPT (Maximum Power Point Tracking) Solar Charge Controller offer an efficient, safe, multi-stage recharging process that prolongs battery life and assures peak performance from a solar array. Each Charge Controller allows customized battery recharging.




- LCD display , easy to operate on LCD screen
- Multi stage charging (3-stage charging , parallel charging and equalized charging function)
- Maximum Solar Input Voltage: 145V
- BTS – Battery remote temperature sensor terminal
- Enable to charge Li-thium, Gel , lead-acid battery
- With RS485 & USB communication port
- Protection: PV array short circuit, PV reverse polarity, Battery reverse polarity, Over charging, Output short circuit



Back panel description

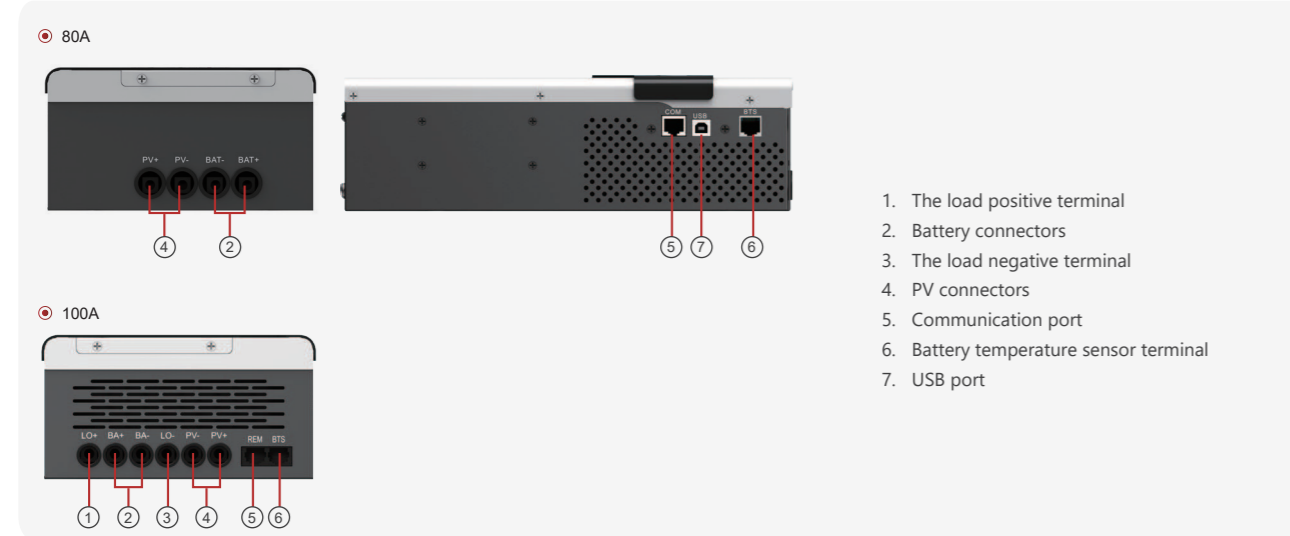

Solar system connection

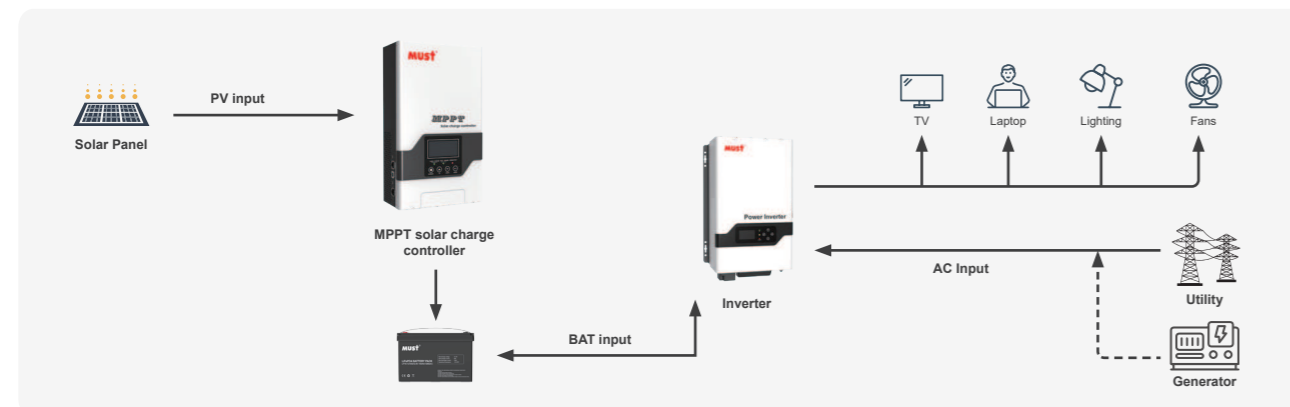

MODEL	PC18-6015F	PC18-8015F	PC18-10015F	
Nominal Battery System Voltage	12V / 24V / 48VDC (Auto detection); 36V (Setting)			
CONTROLLER INPUT				
Battery Voltage	12V / 24V / 36V / 48V			
Maximum Solar Input Voltage	12V (VBAT)	100V		
	24V (VBAT)	145V		
	36V (VBAT)	145V		
	48V (VBAT)	145V		
PV Array MPPT Voltage Range	12V (VBAT)	15-95V		
	24V (VBAT)	30~130V		
	36V (VBAT)	45~130V		
	48V (VBAT)	60~130V		
Maximum Input Power	12V (VBAT)	940W	1250W	1560W
	24V (VBAT)	1880W	2500W	3120W
	36V (VBAT)	2820W	3750W	4680W
	48V (VBAT)	3760W	5000W	6250W
BATTERY				
Charging Set Points	Flooded Battery	Absorption Stage	14.2V / 28.4V / 42.6V / 56.8V	
		Float Stage	13.7V / 27.4V / 41.1V / 54.8V	
	AGM (Default)	Absorption Stage	14.4V / 28.8V / 43.2V / 57.6V	
		Float Stage	13.7V / 27.4V / 41.1V / 54.8V	
Over-charging Voltage	15.5V / 30.0V / 45.0V / 60.0V			
Over-charging Comeback Voltage	14.5V / 29.5V / 44.5V / 59.0V			
Battery Defect Voltage	10.0V / 17.0V / 25.5V / 34.0V			
Temperature Compensation Coefficient	-5mv / °C /cell (25°Cvef)			
Peak Conversion Efficiency	98% (MPPT Efficiency 99%)			
Maximum Battery Current	60A	80A	100A	
Maximum DC load current	/	/	100A	
Max Charging Current	60amps continuous @ 40°C ambient	80amps continuous @ 40°C ambient	100amps continuous @ 40°C ambient	
DISPLAY & PROTECTION				
Protections	Solar high voltage disconnect/ Solar high voltage reconnect/ Battery high voltage disconnect/ Battery high voltage reconnect/ High temperature disconnect/ High temperature reconnect			
MECHANICAL SPECIFICATIONS				
Machine Dimension (W*H*D)(mm)	163.6*306.6*94.9		165*284*97	
Package Dimension (W*H*D)(mm)	/		/	
N.W(kg)	3		4	
G.W(kg)	/		/	
OTHER				
Mounting	Wall mount			
Environmental Rating	Indoor			
Enclosure	IP20			
Radiating Mode	Fan cooling			
Operating Temperature Range	-10~55°C			
Ambient Humidity	0~90% relative humidity (non-condensing)			
Altitude	≤3000m			
CERTIFICATION & STANDARDS				
UKCA (BS IEC62109-1:2010)+CE-LVD(EN IEC62109-1:2010) CE-E-EMC+LVD (EN6100-6-3:2007+A1:2011,EN6100-6-1:2019+EN IEC62109-1:2010)				

*The technical specifications of this document are subject to change without any notice

MPPT SOLAR CHARGE CONTROLLER PC1800F Series




60~100A | 12V,24V,36V,48V | 245V

MPPT (Maximum Power Point Tracking) Solar Charge Controller offer an efficient, safe, multi-stage recharging process that prolongs battery life and assures peak performance from a solar array. Each Charge Controller allows customized battery recharging.




- LCD display , easy to operate on LCD screen
- Multi stage charging (3-stage charging , parallel charging and equalized charging function)
- Maximum Solar Input Voltage: 245V
- BTS – Battery remote temperature sensor terminal
- Enable to charge Li-thium, Gel , lead-acid battery
- With RS485 & USB communication port
- Protection: PV array short circuit, PV reverse polarity, Battery reverse polarity, Over charging, Output short circuit

Back panel description

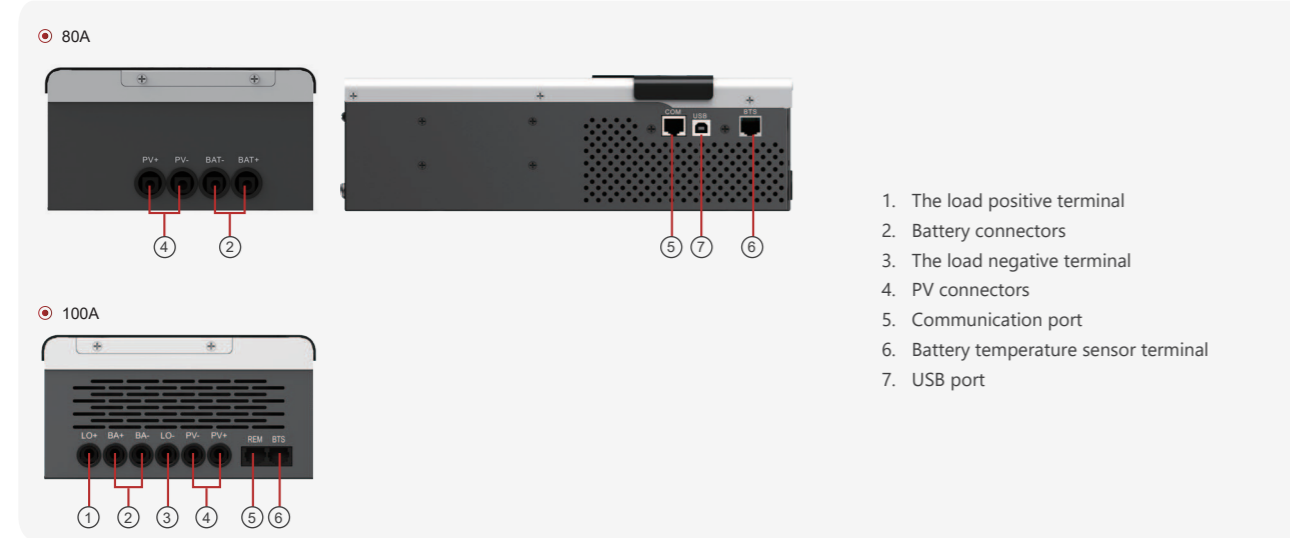

Solar system connection

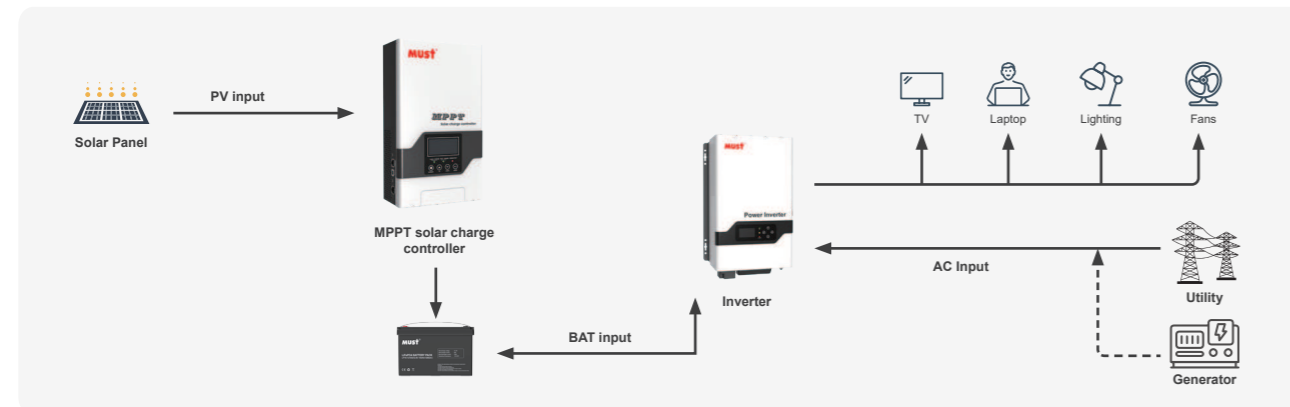

MODEL	PC18-6025F	PC18-8025F	PC18-10025F	
Nominal Battery System Voltage	12V / 24V / 48VDC (Auto detection); 36V (Setting)			
CONTROLLER INPUT				
Battery Voltage	12V / 24V / 36V / 48V			
Maximum Solar Input Voltage	12V (VBAT)	100V		
	24V (VBAT)	245V		
	36V (VBAT)	245V		
	48V (VBAT)	245V		
PV Array MPPT Voltage Range	12V (VBAT)	15-95V		
	24V (VBAT)	30~230V		
	36V (VBAT)	45~230V		
	48V (VBAT)	60~230V		
Maximum Input Power	12V (VBAT)	940W	1250W	1560W
	24V (VBAT)	1880W	2500W	3120W
	36V (VBAT)	2820W	3750W	4680W
	48V (VBAT)	3760W	5000W	6250W

BATTERY				
Charging Set Points	Flooded Battery	Absorption Stage	14.2V / 28.4V / 42.6V / 56.8V	
		Float Stage	13.7V / 27.4V / 41.1V / 54.8V	
	AGM (Default)	Absorption Stage	14.4V / 28.8V / 43.2V / 57.6V	
		Float Stage	13.7V / 27.4V / 41.1V / 54.8V	
Over-charging Voltage		15.5V / 30.0V / 45.0V / 60.0V		
Over-charging Comeback Voltage		14.5V / 29.5V / 44.5V / 59.0V		
Battery Defect Voltage		10.0V / 17.0V / 25.5V / 34.0V		
Temperature Compensation Coefficient		-5mv / °C /cell (25°C vef)		
Peak Conversion Efficiency		98% (MPPT Efficiency 99%)		
Maximum Battery Current		60A	80A	100A
Maximum DC load current		/	/	100A
Max Charging Current		60amps continuous @ 40°C ambient	80amps continuous @ 40°C ambient	100amps continuous @ 40°C ambient

DISPLAY & PROTECTION	
Protections	Solar high voltage disconnect/ Solar high voltage reconnect/ Battery high voltage disconnect/ Battery high voltage reconnect/ High temperature disconnect/ High temperature reconnect

MECHANICAL SPECIFICATIONS		
Machine Dimension (W*H*D)(mm)	163.6*306.6*94.9	165*284*97
Package Dimension (W*H*D)(mm)	/	/
N.W(kg)	3	4
G.W(kg)	/	/

OTHER	
Mounting	Wall mount
Environmental Rating	Indoor
Enclosure	IP20
Radiating Mode	Fan cooling
Operating Temperature Range	-10~55°C
Ambient Humidity	0~90% relative humidity (non-condensing)
Altitude	≤3000m

CERTIFICATION & STANDARDS	
UKCA (BS IEC62109-1:2010)+CE-LVD(EN IEC62109-1:2010) CE-EMC+LVD (EN6100-6-3:2007+A1:2011,EN6100-6-1:2019+EN IEC62109-1:2010)	

*The technical specifications of this document are subject to change without any notice

MPPT SOLAR CHARGE CONTROLLER PC1800A Series

30A, 40A | 12V,24V




This solar charge controller is an advanced solar charger with maximum power point tracking. Applying intelligent MPPT algorithm, it allows solar charge controller to extract maximum power from solar arrays by finding the maximum power point of the array.

The MPPT battery charging process has been optimized for long battery life and improved system performance. Self-diagnostics and electronic error protections prevent damage when installation errors or system faults occur.




- Intelligent Maximum Power Point Tracking technology increases efficiency 25%~30%
- Compatible for PV systems in 12V,or24V
- Three-stage charging optimizes battery performance
- Maximum charging current up to 30A/40A
- Advanced MPPT technology,with efficient no less than 99%
- Maximum DC- DC conversion efficiency of 98%
- Battery temperature sensor(BTS) automatically provides temperature compensation Automatic battery voltage detection
- Integrated intelligent slot compatible with 485 communication

Back panel description

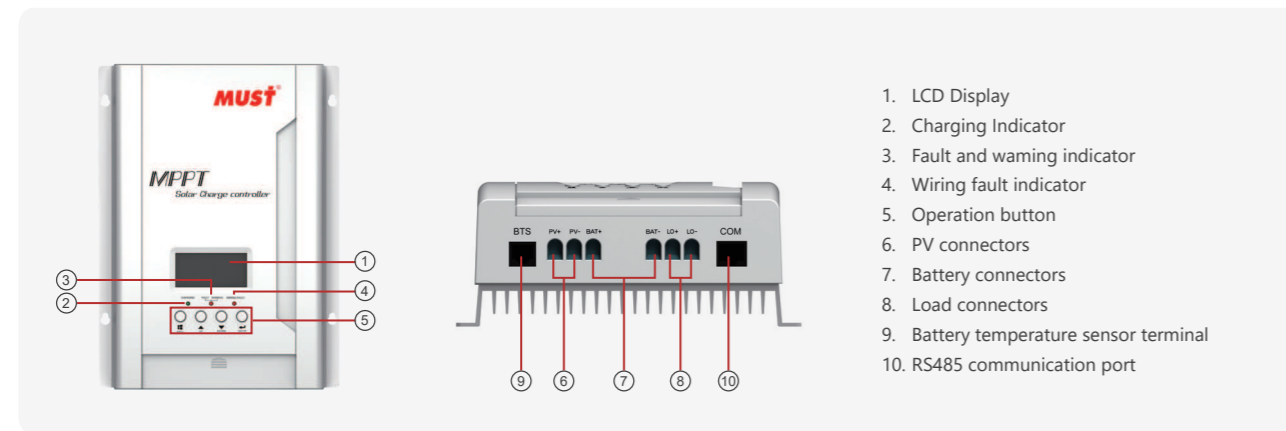

Solar system connection

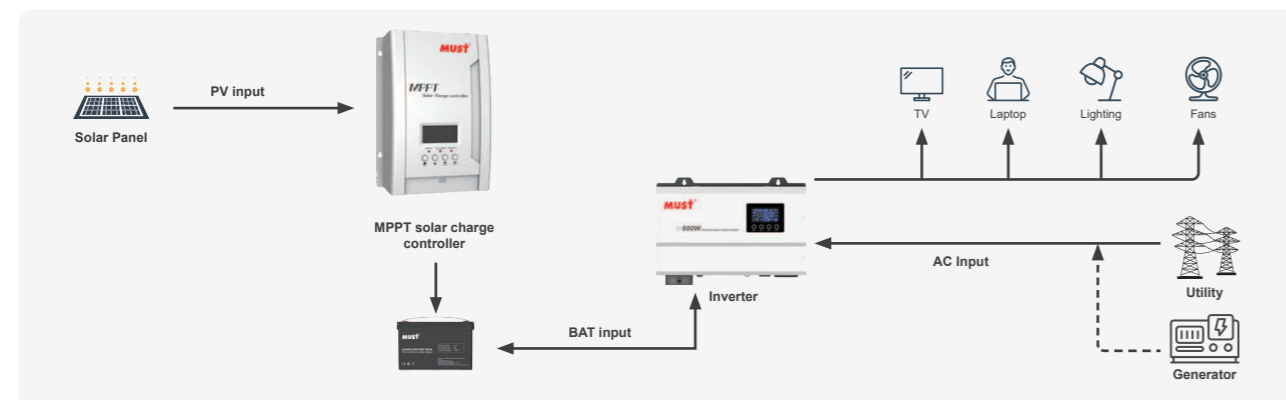

MODEL	PC18-3015A	PC18-4015A	
Nominal Battery System Voltage	12V / 24V (Auto detection)		
CONTROLLER INPUT			
Battery Voltage	12V/ 24V		
Open circuit voltage	145V		
PV Array MPPT Voltage Range	60-130VDC		
Maximum Input Power	12V	432W	576W
	24V	864W	1152W
BATTERY			
Charging Set Points	Flooded Battery	Absorption Stage	14.2V/28.4V
		Float Stage	13.7V/27.4V
	AGM/GEL/LEAD (Default)	Absorption Stage	14.4V/28.8V
		Float Stage	13.7V/27.4V
Over-charging Voltage	15.5V / 30.0V		
Over-charging Comeback Voltage	14.5V / 29.5V		
Battery Defect Voltage	10.0V / 17.0V		
Temperature Compensation Coefficient	-5mv / °C /cell (25°C vef)		
Peak Conversion Efficiency	98% (MPPT Efficiency 99%)		
Maximum Battery Current	30A	40A	
Max Charging Current	30amps continuous @ 40°C ambient	40amps continuous @ 40°C ambient	
GENERAL SPECIFICATION			
Radiating Mode	Automatic cooling		
Protections	Solar high voltage disconnect/ Solar high voltage reconnect/ Battery high voltage disconnect Battery high voltage reconnect/ High temperature disconnect/ High temperature reconnect		
MECHANICAL SPECIFICATIONS			
Mounting	Wall mount		
Machine Dimension (W*H*D)(mm)	187*255*72mm		
Package Dimension (W*H*D)(mm)	/		
N.W(kg)	/		
G.W(kg)	/		
OTHER			
Environmental Rating	Indoor		
Enclosure	IP30		
Operating Temperature Range	-10~50°C		
Ambient Humidity	0~90% relative humidity (non-condensing)		
Altitude	≤3000m		
CERTIFICATION & STANDARDS			
UKCA (BS IEC62109-1:2010)+CE-LVD(EN IEC62109-1:2010) CE-EMC+LVD (EN6100-6-3:2007+A1:2011,EN6100-6-1:2019+EN IEC62109-1:2010)			

*The technical specifications of this document are subject to change without any notice

MPPT SOLAR CHARGE CONTROLLER PC1600A Series

20A, 30A, 40A | 12V,24V

MPPT (Maximum Power Point Tracking) Solar Charge Controller offer an efficient, safe, multi-stage recharging process that prolongs battery life and assures peak performance from a solar array. Each Charge Controller allows customized battery recharging.




- LCD display , easy to operate on LCD screen
- Multi stage charging (3-stage charging , parallel charging and equalized charging function)
- BTS – Battery remote temperature sensor terminal
- Enable to charge Li-thium, Gel , lead-acid battery
- With RS485 & USB communication port
- Protection: PV array short circuit, PV reverse polarity, Battery reverse polarity, Over charging, Output short circuit



Back panel description

1. LCD Display
2. LED Indicator
3. Confirm the selection in setting mode
4. Decrease the setting data
5. Increase the setting data
6. Enter or exit setting mode
7. The load negative terminal
8. The load positive terminal
9. The battery negative terminal
10. The battery positive terminal
11. PV array negative terminal
12. PV array positive terminal
13. Communication network terminal
14. Remote external temperature terminal

Solar system connection

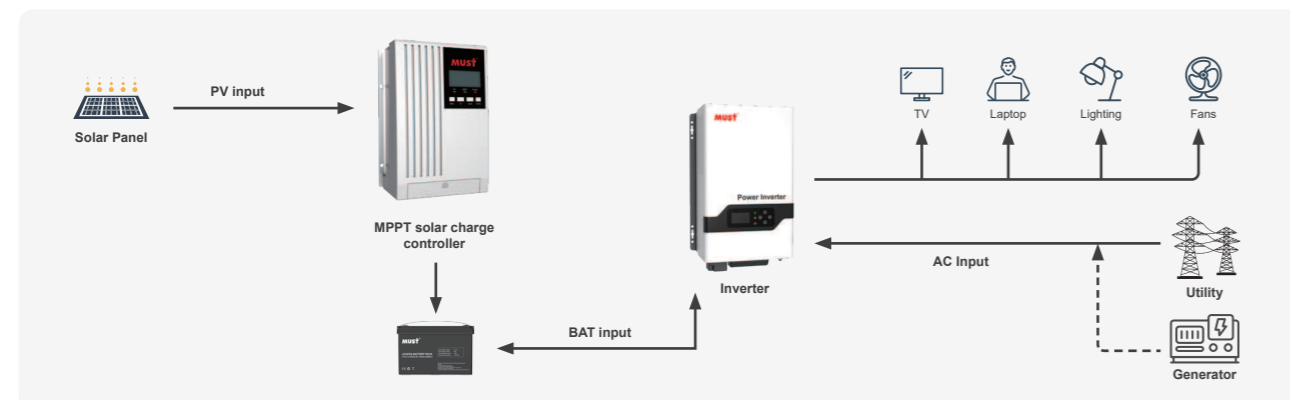

MODEL	PC16-2015A	PC16-3015A	PC16-4015A	
Nominal Battery System Voltage	12VDC / 24VDC (Auto Detection)			
CONTROLLER INPUT				
PV Open Circuit Voltage	12V	100VDC		
	24V	145VDC		
PV Array MPPT Voltage Range	12V	16VDC~100VDC		
	24V	32VDC~130VDC		
Max PV Input Power	12V	300W	450W	600W
	24V	600W	900W	1200W
BATTERY				
Absorption Voltage	12V	12.5VDC		
	24V	25.0VDC		
Refloat Voltage	12V	13.7VDC		
	24V	27.4VDC		
Float Voltage	12V	14.3VDC		
	24V	28.6VDC		
Low Voltage Protection Point	12V	10.0VDC		
	24V	20.0VDC		
DC OUTPUT				
Output Voltage	12V	10.0~14.5VDC		
	24V	20.0~29.0VDC		
Peak Conversion Efficiency	98%(MPPT Efficiency 99%)			
Max Charging Current	20 amps continuous	30 amps continuous	40 amps continuous	
Max Output Current	20 amps continuous	20 amps continuous	20 amps continuous	
Low Voltage alarm	12V	10.25VDC		
	24V	20.5VDC		
Low Voltage cut off	12V	10.0VDC		
	24V	20.0 VDC		
Low Voltage Recovery	12V	11.0VDC		
	24V	22.0VDC		
DISPLAY & PROTECTION				
LED Indication	Systematic operation, LV indication, LV protection, Over charge protection Loads protection, Short circuit protection			
LED Display	Charge Voltage, Charge Current, Voltage of storage battery, Capacity of storage battery, Output current			
Alarm Protections	PV array short circuit, PV reverse polarity			
	Battery reverse polarity, Over charging prtction			
	Output short circuit protection			
	Low voltage protection for storage battery			
MECHANICAL SPECIFICATIONS				
Mounting	Wall mount			
Machine Dimension (W*H*D)(mm)	154*236*88			
Package Dimension (W*H*D)(mm)	/	/	/	
N.W(kg)	/			
G.W(kg)	/	/	/	
OTHER				
Environmental Rating	Indoor			
Radiating Mode	Automatic cooling			
Operating Temperature Range	0°C~ 55°C			
Loading (20GP/40GP/40HQ)	2500pcs / 5000pcs / 5800pcs			
CERTIFICATION & STANDARDS				
UKCA (BS IEC62109-1:2010)+CE-LVD(EN IEC62109-1:2010) CE-EMC+LVD (EN6100-6-3:2007+A1:2011,EN6100-6-1:2019+EN IEC62109-1:2010)				

*The technical specifications of this document are subject to change without any notice

MPPT SOLAR CHARGE CONTROLLER PC1800A Series

60A,80A | 12V,24V,48V


MPPT (Maximum Power Point Tracking) Solar Charge Controller offer an efficient, safe, multi-stage recharging process that prolongs battery life and assures peak performance from a solar array. Each Charge Controller allows customized battery recharging.




- LCD display , easy to operate on LCD screen
- Multi stage charging (3-stage charging , parallel charging and equalized charging function)
- BTS – Battery remote temperature sensor terminal
- Enable to charge Li-thium, Gel , lead-acid battery
- With RS485 & USB communication port
- Protection: PV array short circuit, PV reverse polarity, Battery reverse polarity, Over charging, Output short circuit



Back panel description

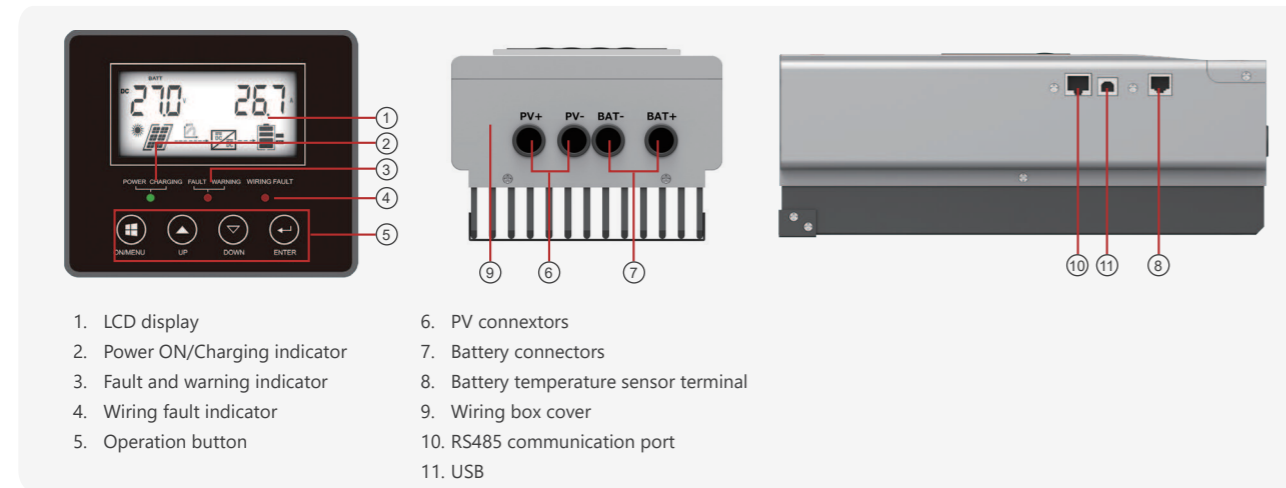

Solar system connection

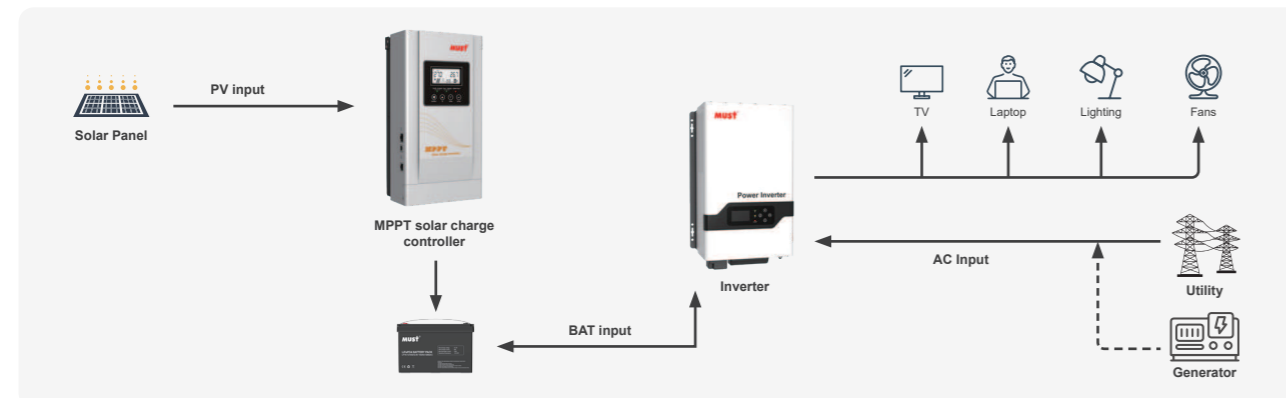

MODEL	PC18-6015A	PC18-8015A	
Nominal Battery System Voltage	12V / 24V / 48VDC (Auto detection); 36V (Setting)		
ELECTRICAL SPECIFICATIONS			
Maximum Battery Current	60Amps	80Amps	
Battery Voltage	12V/ 24V/ 36V/ 48V		
Maximum Solar Input Voltage	12V (VBAT)	100V	
	24V (VBAT)	145V	
	36V (VBAT)	145V	
	48V (VBAT)	145V	
PV Array MPPT Voltage Range	12V (VBAT)	15~95V	
	24V (VBAT)	30~130V	
	36V (VBAT)	45~130V	
	48V (VBAT)	60~130V	
Maximum Input Power	12V (VBAT)	940W	1250W
	24V (VBAT)	1880W	2500W
	36V (VBAT)	2820W	3750W
	48V (VBAT)	3760W	5000W

Protections: Solar high voltage disconnect; Solar high voltage reconnect; Battery high voltage disconnect; Battery high voltage reconnect; High temperature disconnect; High temperature reconnect

BATTERY CHARGING			
Charging Algorithm	3-Step or 4-Step (Li)		
Temperature Compensation Coefficient	-5mV / °C/ cell (25°C ref.)		
Temperature Compensation Set Points	Absorption, Float		
Charging Set Points	Flooded Battery	Absorption Stage	14.2V/ 28.4V/ 42.6V/ 56.8V
		Float Stage	13.7V/ 27.4V/ 41.1V/ 54.8V
	AGM/ GEL/ LEAD Battery (Default)	Absorption Stage	14.4V/ 28.8V/ 43.2V/ 57.6V
		Float Stage	13.7V/ 27.4V/ 41.1V/ 54.8V
Over-charging Voltage	15.5V / 30.0V / 45.0V / 60.0V		
Over-charging Comeback Voltage	14.5V / 29.5V / 44.5V / 59.0V		
Battery Defect Voltage	10.0V / 17.0V / 25.5V / 34.0V		

MECHANICAL & ENVIRONMENT	
Machine Dimension (W*H*D)(mm)	315*160*135
Package Dimension (W*H*D)(mm)	/
N.W(kg)	/
G.W(kg)	/
Operating Temperature Range	-10°Cto 55°C
Storage Temperature	-40°Cto 75°C
Humidity	0%~90% RH (No condensing)
Enclosure	IP20

CERTIFICATION & STANDARDS

UKCA (BS IEC62109-1:2010)+CE-LVD(EN IEC62109-1:2010)
CE-EMC+LVD (EN6100-6-3:2007+A1:2011,EN6100-6-1:2019+EN IEC62109-1:2010)

*The technical specifications of this document are subject to change without any notice