

# SiRo T Full Black



NT12R/48BGDF

# 435-460W

N-type Bifacial Double Glass Module

TOPCon 2.0 Tech



Designed with TOPCon 2.0 technology for higher power output and long-term reliability



Sound quality management and product certification system

IEC61215:2021 / IEC61730:2023

ISO9001:2015: quality management system

ISO14001:2015: environmental management system

ISO45001:2018: Occupational Health and Safety Management System



Low degradation ensures reliable output over the module's lifetime

High bifaciality for superior rear-side power output

Excellent temperature coefficient ensures power generation in high temperature areas


Enhanced low-light response ensures stable output under low-light conditions

## Mechanical Data

Cell Type	N-Type Monocrystalline Solar Cell
Number of Cells	96 Cells (6×16)
Dimensions of Module	1762×1134×30mm (69.37×44.65×1.18 inches)
Weight	24.5kg
Front/Back Side Glass	2.0mm (0.08 inches), High transparency solar glass 2.0mm (0.08 inches), Black glazed mesh glass
Frame	Black, anodized aluminium alloy
J-Box	IP68 Rated, 3 diodes
Cable	4.0mm <sup>2</sup> , +300/-200mm (length can be customized)
Connector	GCL-01/GCL-02/MC4-EVO2/others
Packaging Configuration	Module per box: 36 pieces Module per 40' HQ: 936 pieces

## Module Dimension

Tolerance: Length:±2mm Width:±2mm

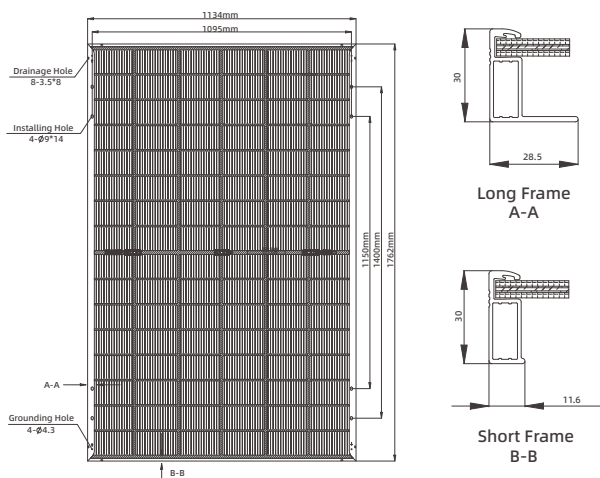

## Electrical Specification (STC\*)

\* Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass 1.5

	Pmax (W)	435	440	445	450	455	460
Maximum Power	Pmax (W)	435	440	445	450	455	460
Maximum Power Voltage	Vmp(V)	29.55	29.85	30.15	30.45	30.72	31.00
Maximum Power Current	Imp (A)	14.72	14.74	14.76	14.78	14.81	14.84
Open Circuit Voltage	Voc (V)	35.08	35.38	35.68	35.98	36.32	36.66
Short Circuit Current	Isc (A)	15.46	15.48	15.50	15.52	15.53	15.54
Module Efficiency	(%)	21.77	22.02	22.27	22.52	22.77	23.02
Power Output Guarantee	(%)	0~+3					
Temperature Coefficient of Isc	(Isc)	+0.045%/°C					
Temperature Coefficient of Voc	(Voc)	-0.25%/°C					
Temperature Coefficient of Pmax	(Pmax)	-0.29%/°C					

## Electrical Characteristics with Different Power Bin (Reference to 10% Irradiance Ratio)


	Pmax (W)	469.8	475.2	480.6	486.0	491.2	496.9
Maximum Power	Pmax (W)	469.8	475.2	480.6	486.0	491.2	496.9
Maximum Power Voltage	Vmp(V)	29.55	29.85	30.15	30.45	30.72	31.00
Maximum Power Current	Imp (A)	15.90	15.92	15.94	15.96	15.99	16.03
Open Circuit Voltage	Voc (V)	35.08	35.38	35.68	35.98	36.32	36.66
Short Circuit Current	Isc (A)	16.70	16.72	16.74	16.76	16.77	16.78

## Application Conditions

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Max Series Fuse Rating	35A
Wind/ Snow Load	2400Pa/5400Pa*
Bifaciality	80±5%

\*For more details please check the installation manual of GCLSI

## Linear Performance Warranty

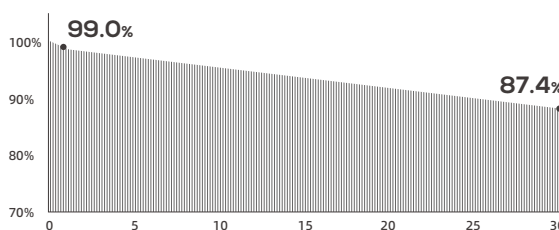

**12** year  
Product warranty

**30** year  
Linear power warranty

**1%**  
First year power attenuation

**0.40%**  
Annual degradation over 30 years